


行业最大的电子样本库

插座网本着“行业专注、用心服务”的理念为用户提供电子样本在线翻阅、在线打印、下载等专业化、个性化服务



JINHAO ELECTRICAL

地面插座/桌面插座 / 2009
Table socket/floor socket

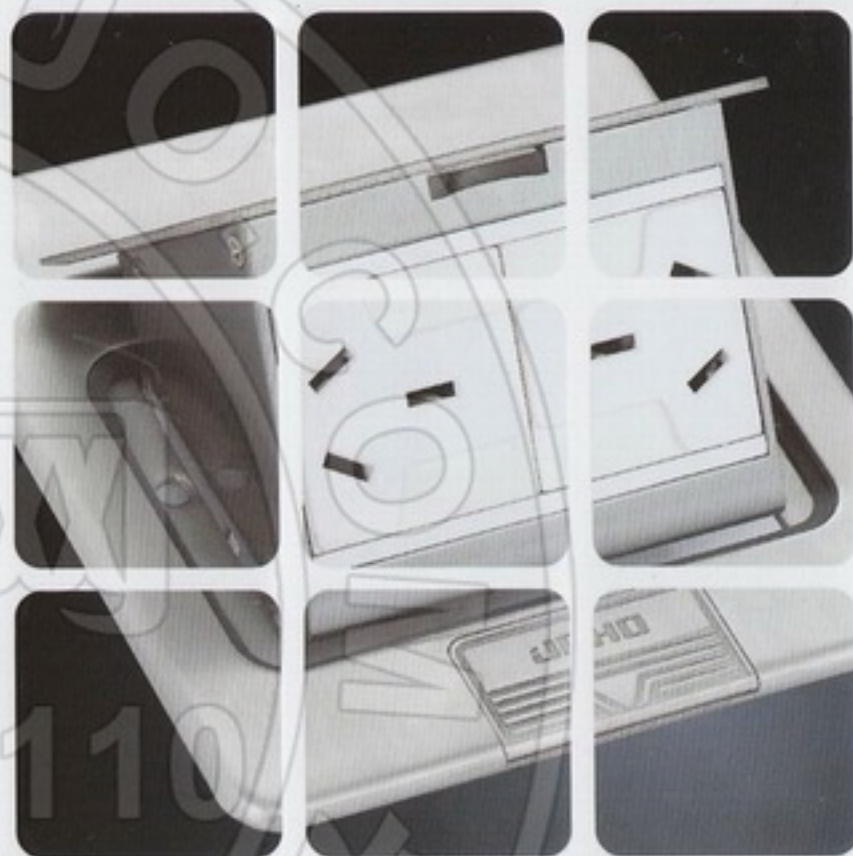

JOHO 锦豪

业专 质精 品新
PROFESSIONAL BUSINESS,
EXQUISITE QUALITY, NOVEL PRODUCT


JOHO 锦豪

Professional business,exquisite quality,novel product is the goal we are pursuing untiringly.
We wish to supply modern architecture wiring system with perfect solving scheme by our professional ability and innovative spirit, to create the miracle together with you in the electrical area.



作为地面插座领域的专业的生产商和供应商我们致力于成为业界的市场领导者。“业专、质精、品新”是我们不懈追求的目标，我们愿以专业技能和创新精神，为现代建筑布线系统提供完美解决方案，与您一同缔造电工领域的奇迹.....

As professional manufacturer and supplier in floor socket areas, we devote to be the market leader in the industry. "Professional business, Exquisite quality, Novel product" is the goal we are pursuing untiringly. We wish to supply modern architecture wiring system with perfect solving scheme by our professional ability and innovative spirit.

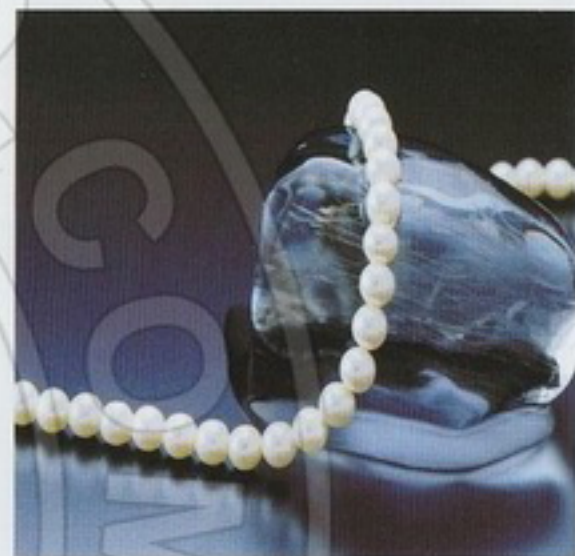

400-657-1110

**PROFESSIONAL BUSINESS,
EXQUISITE QUALITY,
NOVEL PRODUCT**

业专 质精 品新

关于锦豪 About us

We wish to supply modern architecture wiring system with perfect solving scheme by our professional ability and innovative spirit, to create the miracle together with you in the electrical area.....

始创于：1994年10月

座落于：中国最大的低压电器生产基地——柳市

注册资金：1001万元人民币

占地面积：5000m²

建筑面积：7000m²

现有员工：300多人

主要产品：各种地面插座、桌面插座、锻压与压铸五金件、综合布线附件、建筑电器附件等。

Founded in: Oct. 1994

Located in: the largest production base of lv appliance in China-----liushi

Registered capital: 10.01 million RMB

Floor area: 5,000m²

Construction area: 7,000m²

Number of employees: 300

Main products: floor socket, table socket, forging and die-casting hardware, comprehensive wiring accessory and building electric appliance accessory, etc..

携手锦豪一走上成功路

Hand in hand with JOHO for common success



以人为本是一贯遵循的经营理念之一。多年来,随着企业的发展和业务的扩大,公司一直把人才的引进和员工的稳定作为一项重要工作来做,除努力提高员工的工资收入外,在福利方面和员工的生活方面,多方进行改进和提高,使员工能安心在企业工作,因而确保了公司的快速和稳定的发展。

质量是我们永恒的话题,是企业发展的根本。创业初始,企业就十分重视质量工作,从产品的研发开始,我们就在结构、用材等方面予以充分的考虑,在生产过程中,根据ISO9001国际质量体系认证和3C认证的要求,建立了一系列符合质量控制要求的质保体系和一支称职的质控队伍,层层把关,使公司生产的产品质量稳居同行的前列,得到了客户和合作厂家的肯定和赞誉,为扩大销售量,增加市场占有率创造了强有力的保障。

创新和技术开发是我公司的一大优势,多年来经过艰苦努力和积累,我公司的新品种是国内同行最多的,现已获得国家专利局五十多项实用新型专利和发明专利证书,掌握着几乎中国地面插座行业全部的核心技术。公司还被评为“浙江省专利示范企业”,“浙江省三优企业”,“温州市专利示范企业”,“柳市明星企业”,“乐清市著名商标”等一系列荣誉,在同行中有较高的知名度。特别是我们的薄板拉伸再焊接技术和红冲锻压工艺的开发,完全改写了地面插座落后的生产工艺,为保护环境污染,降低生产成本和提高产品品质,做出了巨大贡献。

在企业的管理方面,公司在实行人性化管理的同时,加强现代化企业制度的健全和落实,并充分利用现代化技术,实行计算机管理,技术研发、办公销售、仓储、客户档案,会计核算及安全保卫等方面均用电脑进行控制和管理,使公司的管理做到了规范化和制度化,为企业的进一步发展奠定了坚实的基础。

People orientation is the operation idea that the company always adheres to. For years, with the development of enterprise and enlargement of business, the company has always regarded the recruitment of talents and stableness of employees as the important task. While trying to increase the salary of employee, it positively improves the welfare and life of employees, to make the employees secure in working, so as to ensure the rapid and stable growth of the enterprise.

Quality is our eternal topic, also the base for the developing of the enterprise. Since going into the business, the enterprise has played high premium on quality. In researching and developing the products, the company has fully taken the structure and material selection into account. What's more, in the course of production, the company has established a series of quality assurance system meeting the quality control requirements and competent quality control team according to the requirements of ISO 9001 and 3C, to enable the products to rank the first in the same industry and enjoy high reputation among the customers and partners, and these measures also bring the firm safeguard to enlarge the sales amount and increase the market share.

Innovation and technology development is our great asset, through many years' efforts and accumulation, the company new products and new variety shares the most market in the same industry in China, now the company has

obtained utility model patents and invention patent certificates issued by National Patent Bureau, and mastered most core technology of China floor socket industry. Furthermore, the company has won many honor titles like Zhejiang Model Enterprise for Patent, Zhejiang Three-excellent Enterprise, Wenzhou Model Enterprise for Patent, Liushi Star Enterprise, Yueqing Famous Trademark, etc., in the light of these achievements, the company enjoys high popularity in the same line, especially, the sheet metal drawing rewelding technology and hot punching technique are developed that overcomes the defects of former production technique of floor socket, and makes the great contribution in prevention of the environment pollution and reduction of the production cost and product quality.

In the respect of enterprise management, the company strengthens the soundness and implementation of modern enterprise system, makes full use of modern technology and fulfills the computer management in the technology development, sale, storage and customer archives, accounting, security, etc., while carrying out the humanization management. Thus, the enterprise has been going toward the standardization and institutionalization of management and has established the firm foundation for further development of enterprise.



Multiple field, customers approbate

多样领域，客户嘉许

在商厦、楼宇、会展中心等多种场合，锦豪电工的产品都尽在眼前，安装的便捷，使用的便利以及美观的造型赢得了大众的一致好评。

竭尽创新，不断超越，为建筑布线系统寻求理想方案是锦豪的不懈追求，斐然成绩与卓越品质见证了实力，开启了未来。

On various occasions of commercial mansions, buildings, exhibition center and so on, the products of JOHO come within our eyesight. Convenient to install, easy to use, as well as the beautiful design win the good appraisal from the people.

Try to innovate, surpass continuously and seek the ideal scheme for architectural wiring system is the pursuit of JOHO all along. Brilliant achievements and excellent quality witness the strength and start the future.



郑州宝马展厅



招商局大厦-三星公司



徐州工程兵指挥学院



徐州奥迪4S店



武汉市琴台文化艺术中心



寿光世纪学校



理工学院




明发商业广场




武汉烽火集团



郑州电信大楼

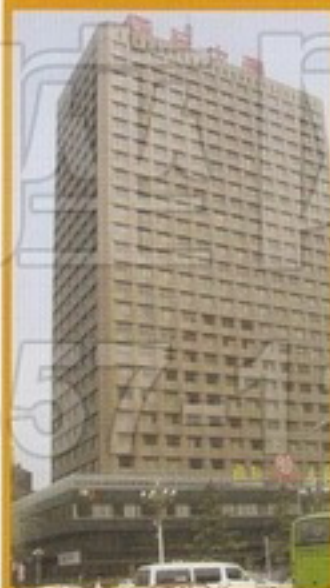

国际大厦B座

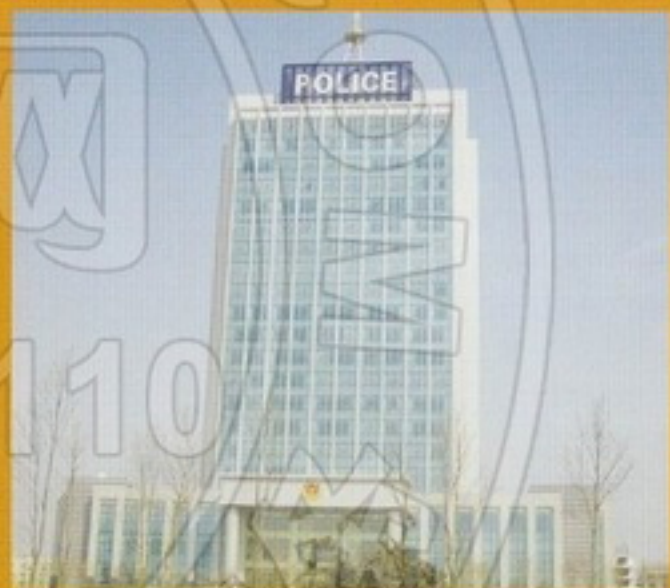

寿光市公安局



潍坊市附属医院



辽宁中医




武警总队



海沧区政府办公楼



徐州财富广场



徐州财富广场



湖北省博物馆



沌口体育中心



沈空司令部



昌鑫置地广场



厦门大学漳州校区



厦门软件园



湖北省统计局



65042部队



湖北省统计局



成都万达广场



厦门软件园二期



厦门文化艺术中心



厦门市文化体育中心



成都高新技术产业开发区



呼市东达广场

北京国际大厦
北京国贸中心
北京招商大厦
北京雍和大厦
青岛金融贸易中心
青岛国际新闻中心
昆明世博生态城
福州电力局
福州长乐变电站
成都双流国际机场
成都国际赛区
淮阴工学院
呼和浩特中国电信枢纽大楼
淮阴工学院
湖北博物馆
湖北农业银行
湖北省统计局
湖北咸宁供电局
湖北黄石电视台
武汉中南财经大学
武汉艳阳天酒店
武汉理工大学
成都中铁二局勘察设计院
杭州金龙大厦
厦门财富大厦
南京中国检验检疫
沈阳65042部队
沈阳昌鑫置地广场
淮安市清浦区人民法院
厦门邮电大厦
德化广播电视台大楼
海沧区政府办公楼
厦门理工学院
厦门市文化艺术中心

厦门大学漳州校区
厦门鸿运大厦
沈阳天宝国际
厦门皇达大厦
湖北国税
杭州市临平区政府大楼
北京市嘉豪国际中心
厦门鸿翔大厦
东莞市政府大楼
杭州国际大厦
中国财经大学图书馆
桂林工学院
辽宁中医院
沈阳空军司令部
沈阳武警总队
徐州财富广场
徐州工程兵指挥学院
潍坊市附属医院
厦门速8酒店
三明市梅列区政府大楼
永春德华广播电视台大楼
厦门鹭岛兴绿化工程有限公司
青岛市中级人民法院
北京佳都2000, 远洋天地, 阳光100
重庆分坪坝大学城, 汽博中心江北法院
天津港散货物流中心交易大厅
泰安: 泰山医学院
温州宝马4S店
温州宝马迷你展厅
温州开源科技楼
温州奔驰4S店
厦门市加洲城市广场
厦门市明发商业广场
山西景峰国际商务大厦

温州和平医院
温州万福医院
温州大自然房产有限公司
温州石油公司大楼
三明市梅列区政府大楼
上海世界电信大楼
上海华东师范大学
上海虹桥机场
浦东金桥进出口加工区
上海市海关检验检疫中心
新疆禾田银监局
昆明疾病预防控制中心
广州日立电梯有限公司
厦门兴业银行大厦
温州国际会展中心
广东省民主大楼
广州新机场
广东省环保局新办公楼
广东省水利院试验研究中心
广州市国土局
广东省无线电检测局
肇庆市人民检察院
广东省金融服务办公楼
广东省电力调度中心
广州大学城科技馆
厦门明发商业广场
厦门市加州城市广场
厦门海沧边检大楼
厦门理工大学
厦门大学(漳州校区)
厦门软件园
三明市梅列区政府大楼
云霄县新城西酒店
.....



成都高新技术产业开发区
人民法院





文化艺术中心

专业品质，卓越成效



质量是我们永恒的话题，是企业发展之根本。

创业至今，企业十分重视质量工作，所生产的产品先后通过电工产品安全认证、ISO9001国际质量体系认证和3C认证，并获得国家专利局五十多项实用新型专利和发明专利，中国电器协会推荐产品证书和住宅建设部推荐产品证书，浙江省专利创新示范企业。

Quality is our eternal topic, also the foundation for developing enterprise. Since founded, the enterprise has been paying attention to the quality work. The products successively passed Electrical Products Safety Certification, ISO9001 International Quality certification and CCC Certification, and obtained over fifty practical and new model patent and invention patent certificates issued by State Patent Bureau, and also won the Recommended Products Certificates by China Electrical Association and Residence & Construction department. Besides, the enterprise had the honor to be titled as Zhejiang Exemplary Enterprise of Patent in novation.

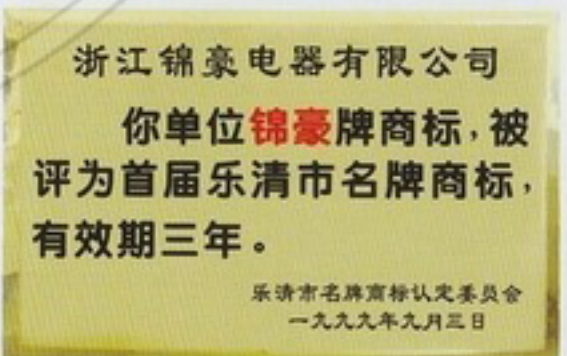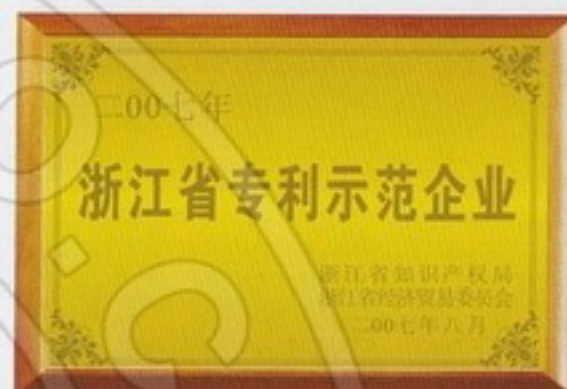

Professional quality,
excellent effect

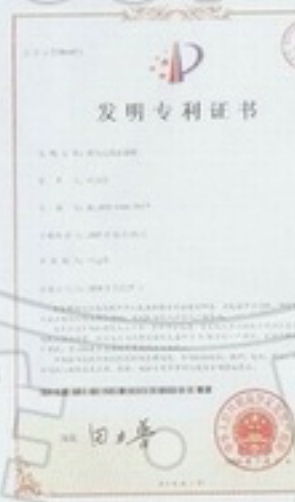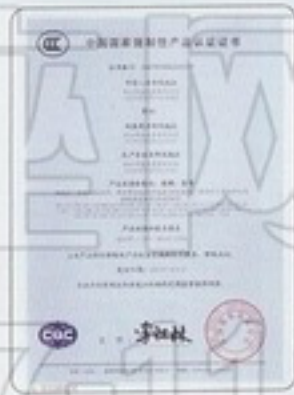

DCT-628/GG / 弹起式地面插座

POP-UP type floor socket

122×120mm 铜合金 Copper alloy



FRESH & ELEGANT

清新 & 雅致

居住的空间，
从来我们都要求清新与雅致，
这就如同锦豪DCK-628/GG系列，
无论是产品外型设计、材质选择，还是色彩搭配，都恪守这一理念。

We always like our living place clear and elegant,
whatever for outline design, material or color mix,
DCK-628/GG series can do all these.

产品特点 Product Characteristic

- 真正全铜制造的地面插座
- 目前中国所有品牌中档次最高的弹起式地面插座
- 单个产品重量达850g以上
- Complete copper floor socket
- The highest class spring-up type floor socket among present top brand in China
- Unit weight is above 850g.

DCK-628/G / 开启式防水地面插座

Open type waterproof floor socket

122×120mm 铜合金 Copper alloy



说明：功能件可任意组合 Note: The functional part is combined randomly

产品特点

Product Characteristic

- ☐ 防水等级：IP66（关闭时）
- ☐ 使用时松开拨片螺钉，拨开拨片，打开上盖
- ☐ 关闭时，按下上盖，拧紧拨片螺钉就可很好防水
- ☐ 可安装于露天广场或对防水要求极高的场所
- ☐ Waterproof Grade: IP66 (in Off condition)
- ☐ Loosen the screw of press sheet, pick the press sheet off and open the upper cover.
- ☐ When it is to be closed, press the upper cover and fasten the screw of press sheet for good waterproof performance.
- ☐ Applicable for open-air square or waterproof demanding place

JOHO 锦豪 01/02
www.china-joho.com


DCT-B28/PBX / 弹起式地面插座

POP-UP type floor socket

124×120mm 不锈钢Stainless steel

- 超薄、纯平、弧形、大拨片设计全球首创。
- 中国最新的第五代不锈钢产品。
- 三项国家专利，更显产品的技术优势。

- Super thin, pure flat, arc, large dial piece design that is the pioneer in the world
- China newest fifth generation stainless steel product
- Three national patents, which shows more technical advantage

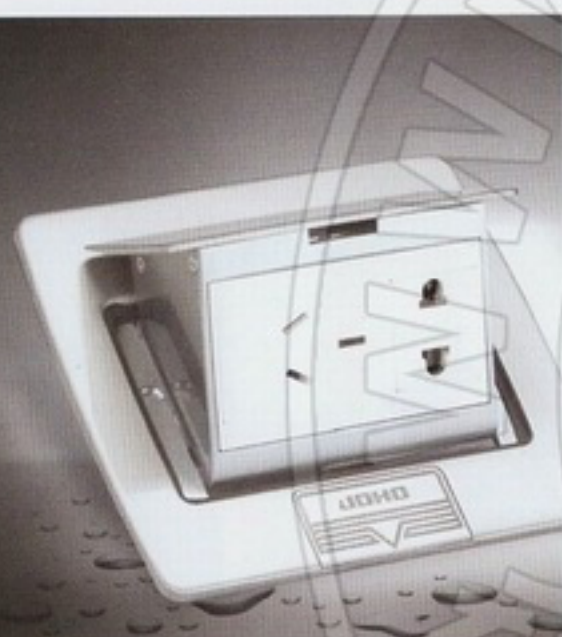

DCT-B28/PBX 不锈钢
Stainless steel 124×120mm



DCT-B28/PA 不锈钢
Stainless steel 124×120mm






- 首创超薄装一位功能件
- 可通用开关86底盒
- 特别适合家庭使用
- Pioneering ultrathin one-bit functional unit
- Universalizable with base of 86 type switch
- Especially suitable for family use.

DCT-086/PB / 弹起式地面插座

POP-UP type floor socket

96×92mm 不锈钢Stainless steel

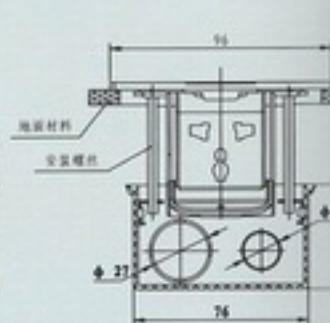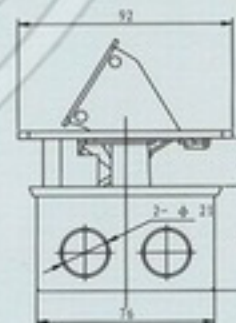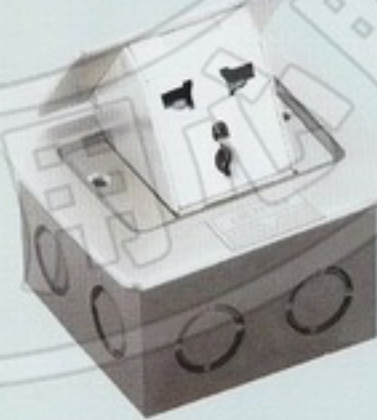

若H > 30mm 时，则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>30mm.

DCT-628/PBU / 弹起式地面插座

POP-UP type floor socket

122x120mm 不锈钢Stainless steel



不锈钢地面插座的技术背景

Technique background of Stainless floor-socket

市场上的该型产品，以前采用精密铸造工艺生产，但虽名曰“精铸”，产品却十分粗糙，且成品合格率低，成本极高，并因需冶炼而污染环境。故用户虽喜用不锈钢产品，但因价高质低而放弃。我公司通过多年的努力，于2004年研发了国内第一款用薄板冲压再焊接技术生产的不锈钢产品。至2007年相继研发了第三款、第四款、第五款不锈钢产品（该产品的核心技术专利为我公司独有，现有其他厂家仿冒）。随着该技术的成熟，完全改变了不锈钢地插难制造的历史，使该型产品的成本更低、品质更高、外观更美观。我们相信依靠自己的核心技术，改变原先落后的生产工艺后，高质价低、美观环保的产品将为地插家族锦上添花，并为市场的繁荣和用户的满意做出我们应有的贡献。

产品特点


Product characteristic

- 全球首创超薄面板。
- 纯平表面，更显产品档次。
- 全新的自卡结构，更加方便换装功能件。
- 可选用螺纹压线端子，适合6mm²以下任何导线。
- 底板也选用不锈钢板制造，与其它同类产品的铁底板比，更加不宜生锈。
- Global originated ultrathin panel.
- pure-plane surface shows the level of products.
- Brandnew down separable functions will be more convenient for reloading functional accessories.
- Firenew screw-thread line terminal, fitting for all kinds of wires below 6mm².
- The base plate is made of stainless steel that will not easy to have rust when comparing with similar iron base plate.



材质：不锈钢、不锈钢钛金面
Material: Stainless steel, Ti-Au plated stainless steel

This type of products on the market usually adopt precision casting technology, is very coarse in some respects though is named "precision casting". It has low qualification rate but high cost, and will pollute environment due to smelting. Although users like to use stainless products, they give up this type of products due to high price and bad quality. Through many years of hard working, our company developed the domestic first stainless product that adopts sheet stamping rewelding technology in 2004, to 2007, the company had developed the third type, fourth type and fifth type stainless products (the company reserves the patent of core technology, now many manufacturers fraudulently copy this type of products) one after the other. Along with maturation of the technology, it ends the history of difficult manufacturing of stainless steel floor socket, let this type of products has lower cost but higher quality and elegant appearance, we believe, depending on our core patent technology, we will change the former backward production process, and the high quality, low price, elegant appearance and environmental protection products will add lustre to the floor sockets, and make contributions to prosperity of market and satisfaction of users.

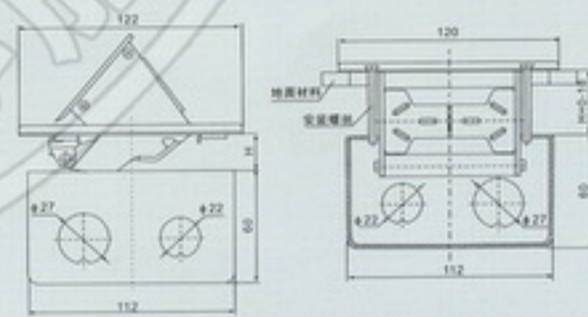

若H>18mm时，则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>18mm.

JOHO 锦豪 03/04
www.china-joho.com

DCT-628/GBX / 弹起式地面插座 POP-UP type floor socket

122×120mm 铜合金 Copper alloy



材质: 铜合金、铜合金镀铬(亮光、哑光)、铝合金
Material: Copper alloy, Cr plated copper alloy(light, matte), AL alloy



仿不锈钢
Imitating stainless steel



铜合金镀铬
Cr plated copper alloy



铝合金
Al alloy




铜合金
Copper alloy



DCT-628/YBX / 仿不锈钢
Imitating stainless steel
122×120mm



DCT-628/YBX / 铜合金镀铬
Cr plated copper alloy
122×120mm

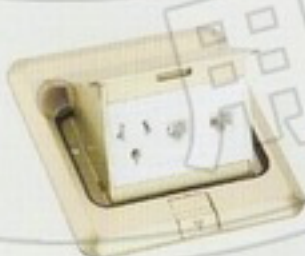

DCT-628/GBX / 铜合金
Copper alloy
122×120mm



DCT-628/LBX / 铝合金
AL alloy 122×120mm


说明: 功能件可任意组合 Note: The functional part is combined randomly

DCT-628/GBX / 弹起式地面插座 POP-UP type floor socket

122x120mm 铜合金 Copper alloy

产品特点 Product characteristic

- 全新的下压结构, 更加方便换装功能性。
- 采用螺旋压线端子, 合适6mm以下任何导线。
- Push-down separable functions will be more convenient for installing functional accessories
- Spiral screw-thread line terminal, fitting for all kinds of wires below 6mm

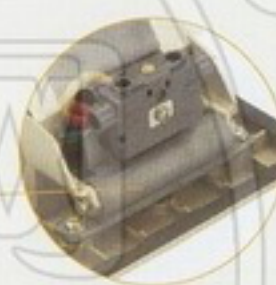

我们公司在2006年开始把阻尼的技术使用到弹起式地面插座来, 解决了快速弹出伤手事故。加了阻装置以后, 不管你怎么操作都不会伤到手指, 是较安全的装置。

Since 2006, the company applied the damping technology to the bounce type floor socket, this application put an end to the injury of hands caused by quick bounce. After being equipped the damping device, your fingers will not be injured anymore.



小多用插功能性是锦豪08年研发的, 具有中国首创的, 可使用二插三插和美式插的产品, 特别适用于三位装的电话、电脑、电源必须安装的场所。


The functional unit for multifunctional mini socket was a pioneer product in China researched and developed by JOHO in 2008, which can be equipped with two and three-pole and American socket and is very suitable for place where has 3-bit telephone, computer and power supply installed.

阻尼慢起装置
所有弹起式产品都可适配该装置

Slow-bounce damping device
This device is suitable for all the bounce type products



快速压线装置
Quick wire pressing device

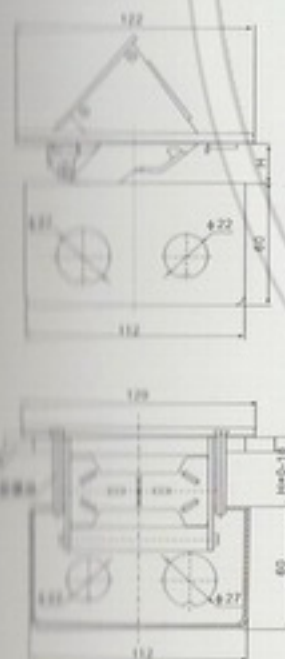

当H>18mm时, 则改用相应长度的安装螺钉
When H>18mm, the corresponding length of the mounting screw should be used



JOHO 锦豪 05/06
www.china-joho.com

DCT-628/GBU / 弹起式地面插座

POP-UP type floor socket

122×120mm 铜合金 Copper alloy

材质: 铜合金、铜合金镀铬 (亮光、哑光)、铝合金
Material: Copper alloy, Cr plated copper alloy (light, matte), All alloy



DCT-628/GBU / 铜合金
Copper alloy
122×120mm




DCT-628/YBU / 铜合金镀铬
Cr plated copper alloy
122×120mm

说明: 功能件可任意组合
Note: The functional part is combined randomly


- 全新的下拆结构, 更加方便换装功能件。
- 可选用螺纹压线端子, 合适6mm²以下任何导线。
- Brand new down separable functions will be more convenient for reloading functional accessories.
- fire new screw-thread line terminal, fitting for all kinds of wires below 6mm²

10mm 銅合金 Copper alloy



Product characteristic

- ☐ 打开地插采用了八字大拨片，开启轻松。
 - ☐ 整体弧形面板，非常美观。
 - ☐ 专用的弹起框架，安装方便。
 - ☐ 上盖前后螺钉固定，更加牢固。
-
- ☐ Open floor socket adopts big eight dialing sheet and it is easy to start.
 - ☐ Beautiful for the integrated arc panel.
 - ☐ Special springing frame is convenient to install.
 - ☐ More firm by fixing the front and back bolts of the top cover.

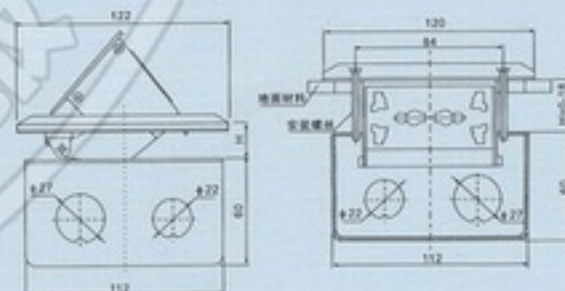

若 $H>18\text{mm}$ 时,则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for $H>18\text{mm}$.

JOHO 锦豪 07/08
www.china-joho.com


DCT-B28/GB / 弹起式地面插座 POP-UP type floor socket

124×120mm 铜合金Copper alloy



DCT-B28/GA / 铜合金
Copper alloy 124×120mm

说明：功能件可任意组合 Note: The functional part is combined randomly

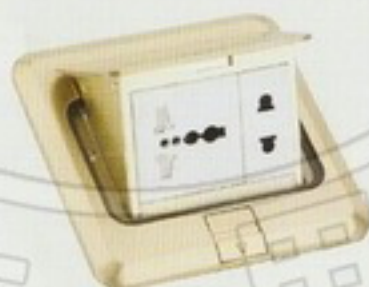

DCT-B28/GBD / 铜合金
Copper alloy 122×120mm



DCT-B28/GAU / 铜合金
Copper alloy 122×120mm

□超薄、纯平、弧形、大拨片设计全球首创
□带防水橡胶按钮，使整体防水等级大大提高，且开启非常轻松自如。

□Super thin, pure flat, arc, large dial piece design that is the pioneer in the world.

□Waterproof rubber button, which improves greatly in integral waterproof class and is easy to open flexibly.

选用压开方式，使开启非常轻松自如，不用灰尘太多而造成开启困难。

The press-open type make it start easily, not have the trouble of trouble of starting difficulty caused by much dust and used a long time.

DCT-145/PBU / 弹起式地面插座

POP-UP type floor socket

110mm 不锈钢 Stainless steel

材质: 不锈钢、铜合金、铜合金镀铬(亮光、哑光)
Material: Stainless steel, Copper alloy, Cr plated copper alloy(light,matte)



DCT-110/GB
φ110mm
铜合金 Copper alloy



DCT-145/PB
φ145mm
不锈钢 stainless steel



DCT-150/GB
φ150mm
铜合金 Copper alloy



DCT-110/GB / 铜合金
Copper alloy φ110mm



DCT-135/GB / 铜合金
Copper alloy φ135mm

说明: 功能件可任意组合 Note: The functional part is combined randomly





DCT-150/GB / 铜合金
Copper alloy φ150mm



DCT-150/YQB / 铜合金镀铬
Cr plated copper alloy φ150mm

产品特点 Product characteristic

- 上盖和功能件框连体压铸,大大提高了产品档次。
- 因结构的改变,无需拆上盖装功能件,大大方便了安装。
- 表面设计为球面,能与圆形更加协调。
- 选用了高精度设备加工,表面光泽照人,是地板插座的精品。
- Linking die-casting for the top cover and function components greatly improve the grade of product.
- Because of the change of the structure, it is unnecessary to discharge the top cover and then install the function component, which is convenient for installation.
- Sphere design of the surface harmonizes with rotundity.
- The equipment process with high precision make the surface shine. It is the quality goods of floor socket.

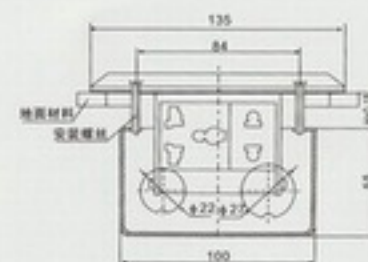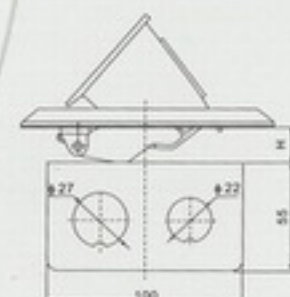


若H>18mm时,则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>18mm.

JOHO 锦豪 09/10
www.china-joho.com

DHM-628/GB / 弹盖式地面插座


POP-Cover type floor socket

120×120mm 铜合金Copper alloy

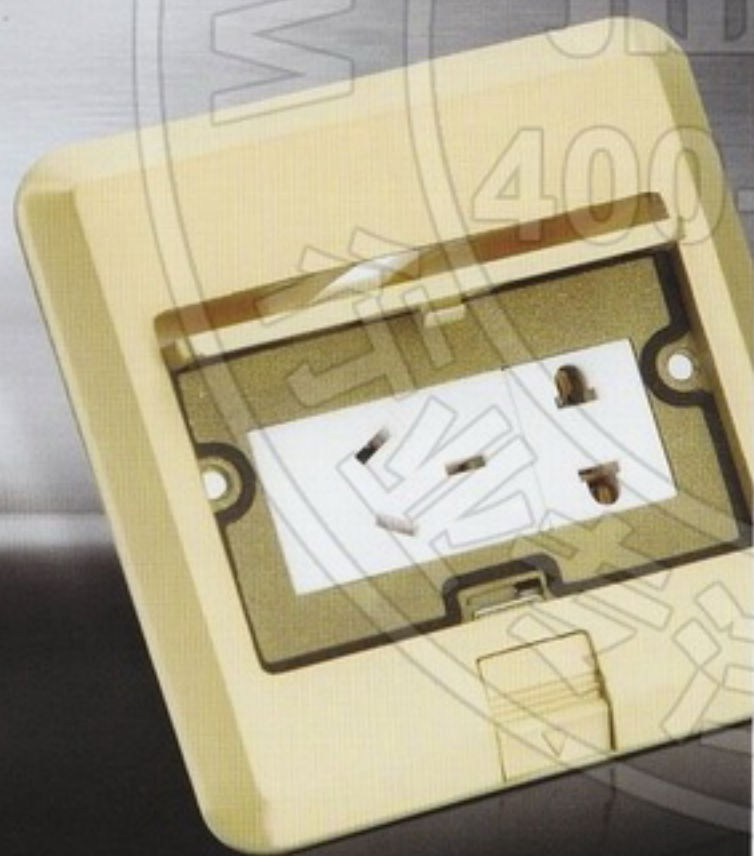

材质: 铜合金、铜合金镀铬
Material: Copper alloy, Cr plated copper alloy

- ☐ 轻拔拨片, 上盖自动弹起落在底盒里。
- ☐ 可装120型X系列功能件或三位弱电模块。
- ☐ 因固定不动的功能件, 适合安装弱电等、容易导线断裂的模块。
- ☐ Lightly pullout the draw flake, and upper cover springs and descends into bottom base automatically.
- ☐ X series functional accessories of 120 type or three gang light current module can be equipped.
- ☐ As fixed functional accessories are fit for equipping with the easy to break module with light current.

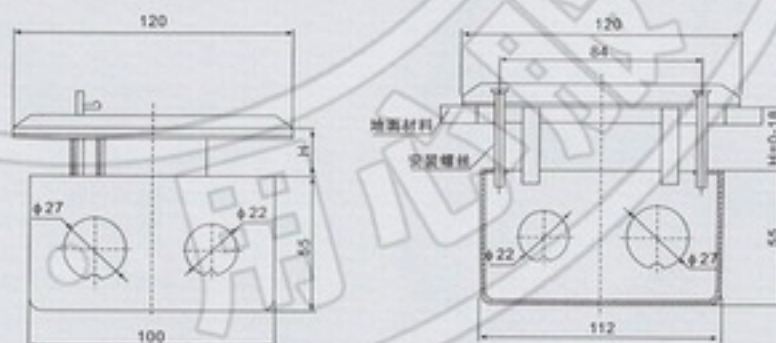

若H>16mm 时, 则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>16mm.



DCT-638/GB / 双连弹起式地面插座

Double-row pop-up type floor socket

111/112mm 铜合金Copper alloy

材质: 铜合金、铜合金镀铬(亮光、哑光)、铝合金
Material: Copper alloy, Cr plated copper alloy(light,matte),AL alloy



铜合金 Copper alloy



DCT-638/GB



铝合金 Al alloy




DCT-638/LB

说明: 功能件可任意组合 Note: The functional part is combined randomly

产品特点 Product characteristic

- ☐ 双连结构, 适合强、弱电一起安装
- ☐ 可安装各式功能件。
- ☐ 自卡结构可方便换装功能件。
- ☐ Double-integral structure, suitable for heavy weak current installation.
- ☐ It can be connected with various functional parts.
- ☐ The Since card structure can be installed with functional parts conveniently.

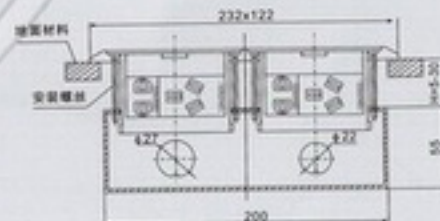


若H>30mm时, 则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>30mm.

三相四线25A / 弹起式地面插座 POP-UP type floor socket

122×120mm 铜合金 Copper alloy



DCT-628/ZAX / 弹起式地面插座
POP-UP type floor socket

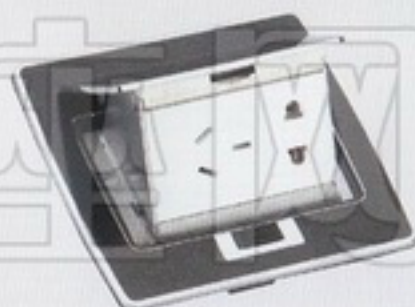

- 首创弹起式三相四线25A 大电流插座。
- 首创地面插座专用的三相五线螺纹压线端子，适合6mm²以下任何导线。
- Unique spring type three-phase four-wire 25A heavy current socket.
- Unique three-phase five-wire screw press line terminal especially for floor sockets, suitable for any conductor of 6mm² below.

DCT-628/ZA / 澳式插座
Australia socket



DCT-628/GBU / 英式插座
England socket



124 × 120mm 锌合金树脂表面 Zinc alloy resin surface


- 选用压开方式，开启轻松自如，且按钮能防水和灰尘进入。
- 整体树脂表面，非常美观，且可做任何颜色。
- Press open mode, easy to open, the button is of waterproof and dustproof.
- Full resin surface, elegant appearance, can be made into any color.

DCT-628/GBA / 带漏电保护插座 Leakage protection socket


127×120mm 铜合金 Copper alloy



国标220V插座
Chinese standard 220V socket

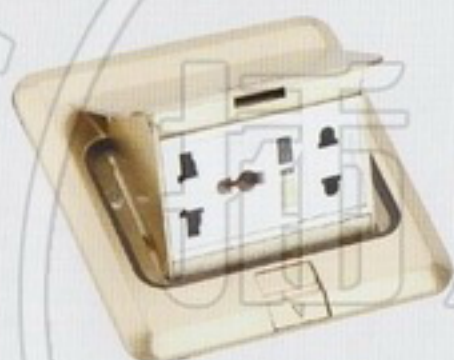


DCT-628/GBB / 国标220V插座
Chinese standard 220V socket

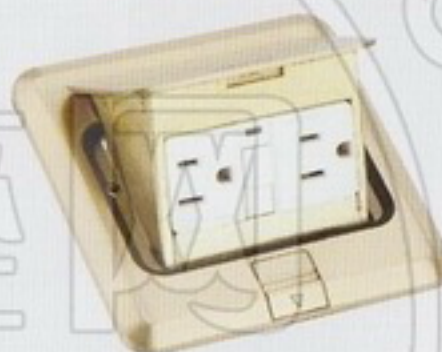

DCT-628/GBB / 美式GFCI插座
Americann GFCI socket



DCT-150/GBB / 美式GFCI插座
Americann GFCI socket

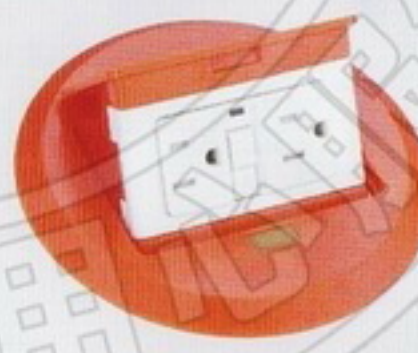

DCT-150/SA / 美式GFCI插座
Americann GFCI socket



DHM-628/GNU / 平推式地面插座

Horizontal sliding floor socket 薄板拉伸工艺 Sheet metal drawing technics

125×125mm 铜合金Copper alloy



材质: 不锈钢、铜合金、铜合金镀铬(亮光、哑光)

Material: Stainless steel, Copper alloy, Cr plated copper alloy(light, matte)



DHM-628/GNU 铜合金
Copper alloy 125×125mm



DHM-628/PLU 不锈钢
Stainless steel 125×125mm



DHM-628/PLU 不锈钢
Stainless steel 125×125mm

说明: 功能件可任意组合 Note: The functional part is combined randomly

□轻按按钮, 上盖自动平推向前弹开。在使用时, 不会因上盖打开造成绊脚。消除了事故隐患。

□采用了U系列功能件, 装四位三插多功能, 也可安装六位电脑模块。

□底部弱电端可选用不锈钢盖屏蔽, 强、弱电一起安装特别理想。


□Lightly press the button, the top cover automatically pushes and springs forward. When using, the open cover will not cause tripping over and eliminate the accident hidden trouble.

□Adopt U series function component for installing 4 way 3pin multifunctional and 3 way computer module.

□Bottom weak electricity end adopts stainless steel cover screen. Strong and weak electricity are installed together will be more ideal.



不锈钢屏蔽盖
Stainless steel shielding cover

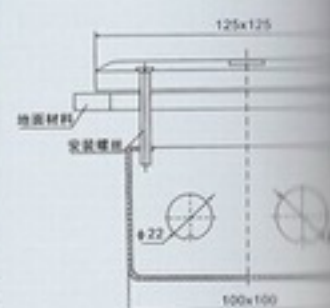


若H>15mm时, 则改用相应长度
Mounting screw of relative length should be used

DHM-628/GNX / 超薄式地面插座 Ultrathin type floor socket

126×120mm 铜合金Copper alloy




DHM-628/PNX / 不锈钢
Stainless steel 126×120mm

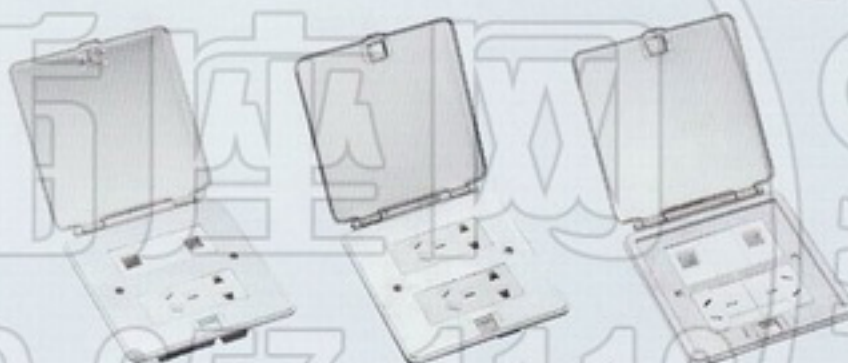


说明：功能件可任意组合 Note: The functional part is combined randomly

DHM-628/GU / 铜合金
Copper alloy 126×120mm

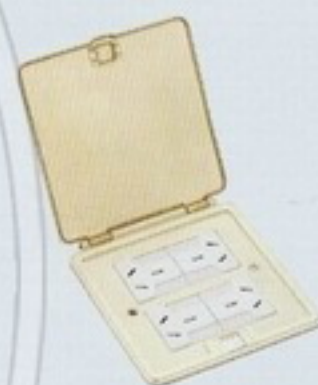

DHM-628/HS / 铝合金
Al alloy 125×125mm

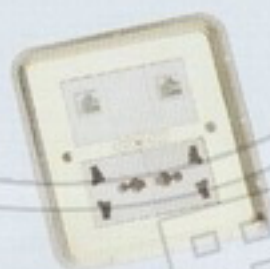

外盖选用透明塑料，既美观又密封。底部弱电端可选用不锈钢盖屏蔽，强、弱电一起安装，特别理想。使用时掰开透明盖子即可。
The outside cover adopts the transparent plastic, beautiful and sealed. Bottom weak electricity end adopts stainless steel cover screen. Strong and weak electricity are installed together will be more ideal. Open the transparent cover to use.

产品特点 Product characteristic

- 安装后离地面只有6.5mm厚度，和同类产品比较，更加不易绊脚。
- 打开使用时，也可选择把盖子平开到地面，防止了因盖子高立所造成的安全隐患和产品损坏。
- 打开选用掰开方式。防止无意中打开的隐患。
- 全新的功能件框架，非常方便换装功能件。
- Only 6.5mm thickness from floor after installation. Compared with similar products, it is not easy to stumble much more.
- When using, open the cover horizontally to the floor to avoid accident potential and product damage caused by cover erection.
- To choose open type to open the cover, to avoid the hidden danger caused by accidental open.
- Brand new frame of function accessories, easy to change.

DCT-D28/GB / 弹起式地面插座

POP-UP type floor socket

134x125mm 铜合金Copper alloy

材质：铜合金、铜合金镀铬
Material: Copper alloy, Cr plated copper alloy



铜合金
Copper alloy



DCT-D28/GB / 铜合金
Copper alloy 134 x 125mm




DCT-D28/YB / 铜合金镀铬
Cr plated copper alloy 134 x 125mm

说明：功能件可任意组合 Note: The functional part is combined randomly

产品特点 Product characteristic

- ☐ 此插座共有正面、上盖面二组插座。
- ☐ 正面有二位多用插座、一位二极插座，也可换装三位各式弱电(各式电脑、话筒、音视频、音响插座)。
- ☐ 上盖面有二位多用插座。
- ☐ 使用时可拨开拨片，使整个插座体弹起，此时可使用正面三位插座，当正面插座不够插头需求时，可按入正面上部小按钮翻开上盖，再使用上盖面二位多用插座。(此功能是该发明专利的主要特点)。
- ☐ 该产品虽有二组众多插座，但导线安装和老产品一样，底盒与老产品通用，(如果已埋有标准底盒，但想有众多插座，就选用该产品)。
- ☐ The floor socket has two groups of socket of face and top cover face.
- ☐ Face has two way multi-use socket and one way two pole socket, which can be changed to three way varied weak electricity (varied computer, microphone, audio-video, hi-fi socket).
- ☐ Cover face has the two way multi-use socket.
- ☐ Poke the dialing sheet when using to make the socket body spring. Then the three way socket of the face can be used. When the face socket doesn't meet the needed pins, you can break the top cover by pressing the top small button on the face and use the two way multi-use socket on the top cover face. (This function is the main characteristic of the invention patent).
- ☐ Although the product has two groups of numerous socket, the lead installation is the same with that of old products. The base box is universal. (If covered with standard base box, but want numerous socket, please choose this product).

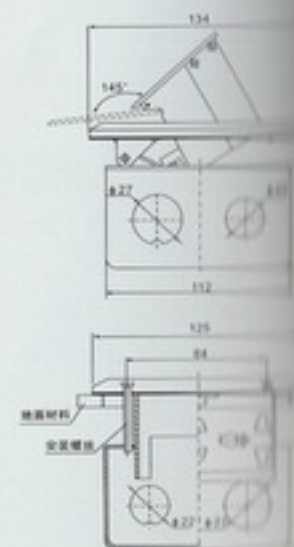

若H>18mm时，则改用相应长度的螺钉
Mounting screw of relative length shall be used



DCT-S28/GB / 弹起式地面插座 POP-UP type floor socket

123x120mm 铜合金Copper alloy

材质: 铜合金、铜合金镀铬
Material: Copper alloy, Cr plated copper alloy

说明: 功能件可任意组合
Note: The functional part is combined randomly



DCT-S28/GB / 铜合金
Copper alloy 123x120mm





DCT-S28/YB / 铜合金镀铬
Cr plated Copper alloy 123x120mm



产品特点 Product characteristic

- ☐ 此地插可安装四位118型U功能件(36x36mm)或六位弱电模块(24x36mm)。
- ☐ 可选择弹出一排, 或全部弹出使用。
- ☐ 只需拆中央压条换装功能件, 方便简单。
- ☐ 螺纹压线端子, 适合6mm²以下任何导线。
- ☐ 可使用普通底盒, 但要求地面至底盒深度达75mm以上(埋普通底盒后地面装修大理石, 深度就够)。
- ☐ 也可使用专用80mm深度底盒。
- ☐ The floor socket can be equipped with U functional accessories of four gang 118 type (36x36mm) or six gang light current module (24x36mm).
- ☐ Eject a row or all to use.
- ☐ Simply to dismount central hold down strip to replace functional accessories, convenient and simple.
- ☐ Fire new screw-thread line terminal, fitting for all kinds of wires below 6mm².
- ☐ Use plain bottom base, but depth between ground and bottom base above 75mm is required. (in earth plain bottom base and marble finished on ground, the depth is enough).
- ☐ Special bottom base with 80mm depth can also be used.

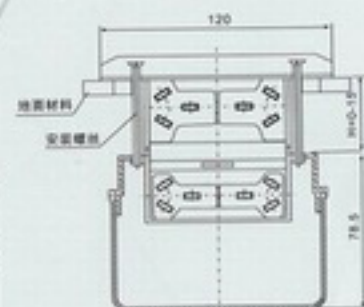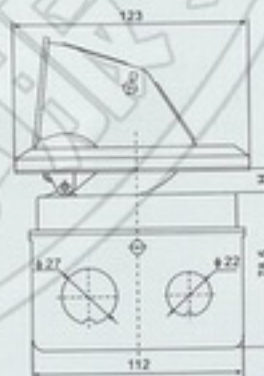

若H>15mm时, 则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>15mm.

DCC-629/GB / 开启式地面插座

Open type floor socket

135x135mm 铜合金Copper alloy

材质: 铜合金、铜合金镀铬
Material: Copper alloy, Cr plated copper alloy

说明: 功能件可任意组合
Note: The functional part is combined randomly




DCC-629/GB / 铜合金
Copper alloy 135 × 135mm



DCC-629/YB / 铜合金镀铬
Cr plated Copper alloy 135 × 135mm

产品特点 Product characteristic

- 使用时打开上盖连同功能件提起, 翻转塑胶出线口至出线位置, 使插入插头更加方便。
- 插入插头可连同插头盖好上盖, 只留出线口出插头线。方便了通行及清扫。
- 不用时可翻转出线口至封闭状态。防止灰尘进入盒内。
- Open the top cover and lift together with the function component, overturn the plastic line-out mouth to the line-out position, and to make it easy to insert the plug.
- Insert the plug and cover the top cover. Just left the plug wire of line-out mouth. It is convenient for passing and cleaning.
- Overturn the line-out mouth to the close status when not using to avoid dust entering into the box.

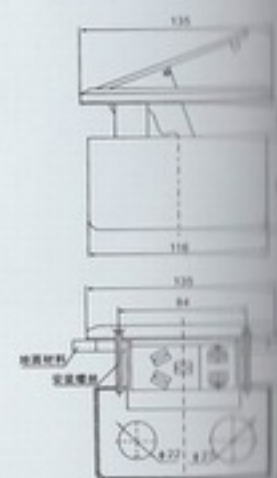

若H>18mm时, 则改用相应长度的安装螺钉
Mounting screw of relative length shall be used

DCK-629/L / 开启式地面插座 open type floor socket

110x140x4mm 底盒尺寸: 195x125x65mm




产品特点 Product characteristic

- 功能件在底盒内两头安装，特别适合强、弱电。
- 可将插头插在盒内盖上盖板，保护了插头、方便了通行及清扫。
- 出线口的设计更加合理，使用时，插头线可从出线口出来，不会因人为原因踩坏插头线，不用时可翻转出线口，可防止灰尘等进入盒内。

- Function component is installed at the both end of the inside of base box, especially fit strong, weak electricity.
- Plug can be inserted in the box and then cover the cover board, which protects the plug and also is convenient for passing and cleaning.
- Design of the line-out mouth is more reasonable. When using, plug wire can out from the line-out mouth. The plug wire can't be trampled by contrived cause. When not using, overturn the line-out mouth to avoid dust entering into the box.



110x140x4mm / 不锈钢
(inserting type)

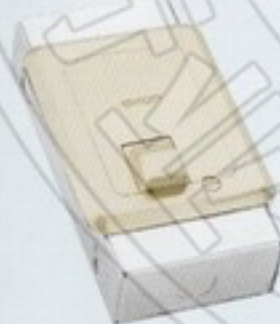

DCK-629/G / 铜合金
Copper alloy 110x140mm
底盒尺寸 Base box size:
95x195x45mm



DCK-637/G / 铜合金
Copper alloy 110x140mm
底盒尺寸 Base box size:
150x195x45mm

产品特点 Product characteristic

- 功能件在底盒内两头安装，特别适合强、弱电。
- 底盒高度只有45mm，适合水泥找平薄的地面。
- 可将插头插在盒内盖上盖板，保护了插头、方便了通行及清扫。
- 出线口的设计更加合理，使用时，插头线可从出线口出来，不会因人为原因踩坏插头线，不用时可翻转出线口，可防止灰尘等进入盒内。

- Function component is installed at the both end of the inside of base box, especially fit strong, weak electricity.
- 45mm height of the base box is fit for the flat cemented floor.
- Plug can be inserted in the box and then cover the cover board, which protects the plug and also is convenient for passing and cleaning.
- Design of the line-out mouth is more reasonable. When using, plug wire can out from the line-out mouth. The plug wire can't be trampled by contrived cause. When not using, overturn the line-out mouth to avoid dust entering into the box.

DCK-146/GT / 开启式地面插座

Open type floor socket

146×146×60-80mm 铜合金Copper alloy



材质：铜合金、铜合金镀铬、不锈钢
Material: Copper alloy, Cr plated copper alloy, Stainless steel



DCK-120/PT / 不锈钢
Stainless steel
122×120×65mm




DCK-120/GT / 铜合金
Copper alloy
122×120×65mm



DCK-146/PT / 不锈钢
Stainless steel
145×145×60-80mm

产品特点 Product characteristic

- ☐ 插入插头可连同插头盖好上盖，只留出线口出插头线。方便了通行及清扫。
- ☐ 纯平表面、更显产品档次。
- ☐ 侧插式的产品特别适合强、弱电一起安装。
- ☐ 不锈钢的产品可以选择钛金面。
- ☐ Insert the plug and cover the top cover, Just left the plug wire of line-out mouth. It is convenient for passing and cleaning.
- ☐ Pure-plane surface shows the level of products.
- ☐ Side-surface inserting of products is especially fitting for the installation of strong power and poor power together.
- ☐ Ti-Au surface can be chosen for stainless products.

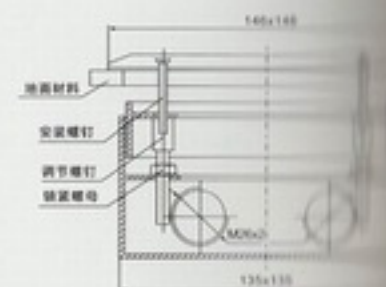

若H>18mm时，则改用相应长度螺钉
Mounting screw of relative length shall be used


DCX-130/G / 螺旋式地面插座

Spiral type floor socket

110mm 铜合金Copper alloy



材质：铜合金、铜合金镀铬
Material: Copper alloy, Cr plated copper alloy

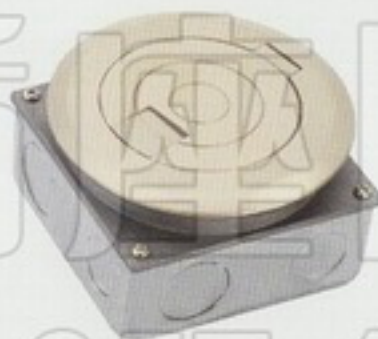

DCX-110/G / 铜合金
Copper alloy $\phi 110\text{mm}$




DCX-110/G / 铜合金
Copper alloy $\phi 110\text{mm}$

说明：功能件可任意组合 Note: The functional part is combined randomly

产品特点 Product characteristic

- ☐ 真正能防水的地面插座。
- ☐ 是安装弱电的最佳选择。
- ☐ 开启非常方便。
- ☐ 带水平微调增高装置，不会因底盒预埋歪斜或过深而造成不能安装表面铜盖。
- ☐ Genuine water-proof floor socket.
- ☐ The best choice for installing weak electricity.
- ☐ Easy to open.
- ☐ With the level micro-regulating heighten equipment. Deflection or deeper for the pre-embedding base box will not cause the failure of installing the surface brass cover.

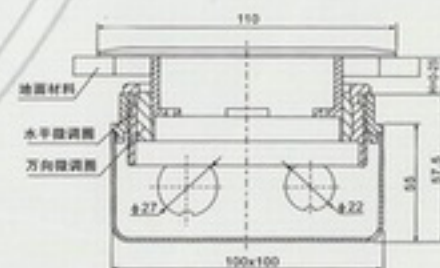

若H>25mm时，则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>25mm.

ZCY-108/NX / 压出式桌面插座

Press type table socket


108×108mm 锌合金树脂表面 Zinc alloy resin surface

颜色可随意搭配
The color be combined randomly

材质: 锌合金树脂表面
Zinc alloy resin surface



说明: 功能件可任意组合
Note: The functional part is combined randomly

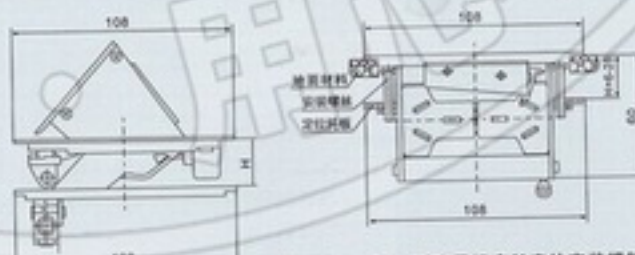

若H>25mm时, 则改用相应长度的安装螺钉
Mounting screw of relative length shall be used for H>25mm.

桌面插座的技术背景

目前中国市场普遍采用引进美国技术的桌面插座, 它基本是用铝板加工生产的, 其加工工艺难度很大, 工序很多, 所以制造成本很高。为了大量推广桌面插座, 我公司潜心研究, 采用树脂制作表面的小型桌面插座, 该产品外观作非常精美, 整体档次很高, 且生产同类产品比较, 大大降低, 一投入市场, 深受广大用户的喜爱, 为桌面插座的大量推广打下了坚实的基础。下一步我公司会在用户使用中提出的宝贵意见上开发系列产品来满足各方面需求。

Technique background of Blain floor-socket

At present, the domestic market widely use table socket that imports American technology. It is made of aluminum plate by means of finish machining almost. It has many processes, high difficult process and high cost to improve the product. In order to popularize the table socket, our company developed the resin surface miniature table socket. The product has fine appearance and high-grade integral effect, when compared with the similar products, it has low cost and wins favorable comments from users. As putting into the market, this lays a foundation for the wide popularization of sockets. For the future, the company will appreciate suggestions from users and develop serial products to satisfy the demands of users.

ZCC-158/L / 隐藏式桌面插座 Hidden type table socket


132×164mm 铝合金Al alloy

产品特点

Product characteristic

- ☐ 轻压中间小盖子就能完成开启与关闭，使用非常方便。
- ☐ 厚度只有1.5mm,能很好地贴近桌面。
- ☐ 连同插头盖在盒子内使用。使桌面平整，整洁。
- ☐ 可根据桌面的搭配做成各种颜色。

- ☐ Start and close for the product just can be finished by gently press the middle small cover. It is very convenient to use.
- ☐ With 1.5mm thick ness, it is close to the desktop.
- ☐ Used in the box together with plug cover. Enable the desktop to be smooth and clean.
- ☐ The surface can be made into various colors to match the desktop.

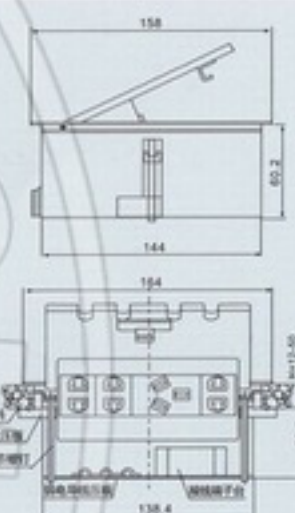

若H<12mm时，则需外加辅助材料以增加桌面的厚度要求
When H<12mm, extra auxiliary material shall be used for required desktop thickness.

产品特点

Product characteristic

- ☐ 轻压中间小盖子就能完成开启与关闭，使用非常方便。
- ☐ 厚度只有1.2mm,能很好地贴近桌面。
- ☐ 可拆两侧螺钉取下功能件支架，非常方便安装和换装功能件(此功能是该产品特点)。
- ☐ 可根据桌面的搭配做成各种颜色。

- ☐ Start and close for the product just can be finished by gently press the middle small cover. It is very convenient to use.
- ☐ With 1.2mm thick ness, it is close to the desktop.
- ☐ Disassemble the screws on both sides to take down the functional support, and the functional parts can be installed or changed conveniently.
- ☐ The surface can be made into various colors to match the desktop.

ZCY-165/L / 压出式桌面插座 Press type table socket

132×165mm 铝合金Al alloy



部分综合布线附件/ Part integrated wiring accessories



线槽产品特点

Characteristics of wiring duct products

□进入二十一世纪,人类跨入了知识经济时代,“智能大厦”就是这个时代的产物。譬如,大型展览中心、大开间写字楼、试验室、高层等,它们内部的动力和信息处理设备对布线系统提出了极高的要求。为了满足这一需求,我公司设计、制造了地面线槽系统。它能强电、弱电分槽敷设,线路可以实现很好的满足了各楼层不同地点的动力设备和信息设备的布线要求。

□该系统由线槽、分、出线箱、分、出插座、插座盒及附件组成。

□该系统设计合理,选材精良、制作精良,具有美观、经济的、不同规格型式的单个柔性单元组成的完整柔性系统。

□该系统以其独到的隐蔽性、柔性、安装简便、维护性赢得广大设计、施工单位和业主的青睐。

□ Entering into 21st century, human step into the knowledge and economy age. "Intelligent building" is the outcome of this age. For example, large exhibition center, large office building, laboratory, high-rise building and so on. Their numerous power and information processing device have high requirements for the wiring system. Aim at the requirements, our company designed and manufactured the integrated wiring system for floor wiring duct.

□ It can lay the duct-dividing for strong electricity. Circuit may perform many functions which will meet the wiring requirements of power and information processing device at different points in every building.

□ The system is composed of wiring duct, junction box and line-out box, junction box and access box, multifunctional socket box and accessories. The system is designed reasonably, excellent in appearance, exquisite facture, if can compose the soft cells to complete functions by the scientific and various types single soft cells.

□ The system win the favour of design units and owners through its original performance, concealment, soft, reliable installation and maintenance.

部分综合布线附件/
Part integrated wiring accessories



部分地插预埋底盒 / Part floor socket preembedded base case



产品特点 Product characteristic

- 因上小下大的结构，特别适合各式架空地板使用。
- A118底盒因盒内空间大，在布线时，可同时做为接线盒使用，是本公司专利产品。
- S100、S118、A118、A115可配置本公司直接式(GA)地面插座，也可配置其它品牌地面插座。
- The structure of small top and big underside is especially suitable for all kinds of overhead floors.
- Large space of the A118 base box, when wiring, it can be used as junction box at the same time. It is the patent product of our company.
- S100, S118, A118, A115 can collocate with direct-pressing type floor socket of our company and other spring types.

JD / 系列高分断小型断路器

JD Series High Breaking Capacity Miniature Circuit Breaker



1、JD-63C高分断小型断路器（以下简称JD-63）是一种具有过载与短路双重保护的限流型高分断小型断路器，其适用于交流50/60Hz，额定电压230/400V电流至100A及以下的电路中。作为线路过载和短路保护之用，D型适用于保护电动机。

1.2 正常使用的工作条件：

- a. 海拔不超过2000m；
- b. 周围空气温度不高于+40℃及不低于-5℃ 24h的平均值不超过+35℃；
- c. 周围的相对湿度，在周围空气温度为+40℃时不超过50%；在较低温度下允许有较大相对湿度，最湿月的月平均最大相对湿度为90%，同时该月平均最低温度为+25℃，并允许因温度变化发生在产品上的凝露；
- d. 在无爆炸危险介质中，且介质中无足以腐蚀金属和破坏绝缘的气体与尘埃；
- e. 在没有雨雪侵袭的地方；f. 无明显振动的冲击振动的地方；

1. JD-63C high breaking capacity miniature circuit breaker (hereinafter referred to as JD-63) is current limiting type circuit breaker with over load and short circuit protection, it's applicable for overload and short circuit protection in 50/60Hz alternating current circuit with rated voltage of 230/400V and rated current up to 100A. D type is suitable for motor protection.

1.2 Normal Operating Condition

- a. Altitude: $\leq 2000\text{m}$;
- b. Ambient air temperature: $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$, maximum daily average temperature $\leq +35^{\circ}\text{C}$;
- c. Ambient relative humidity: $\leq 50\%$ at $+40^{\circ}\text{C}$ ambient temperature; higher RH (relative humidity) is allowable at lower temperature, maximum average RH in the moistest month shall be 90% with the lowest average temperature of $+25^{\circ}\text{C}$ at the same month, dew on product caused by humidity is allowable;
- d. In media with no explosion danger, and there shall not be enough corrosive gas and dust which may rot the metal or wreck the insulation;
- e. Place without rain and snow attack; f. Place with no intensive shake.

JOHO 锦豪 27/28
www.china-joho.com

120型X功能件/ 120 Type X Functional accessories



118型U功能件/ 118 Type U Functional accessories



128型功能件/ 128 Type Functional accessories




K4.0型D功能件/ K4.0 Type D Functional accessories



其它配套附件 / Other suit accessory



功能件拆换方法 / Functional Unit Exchange Method

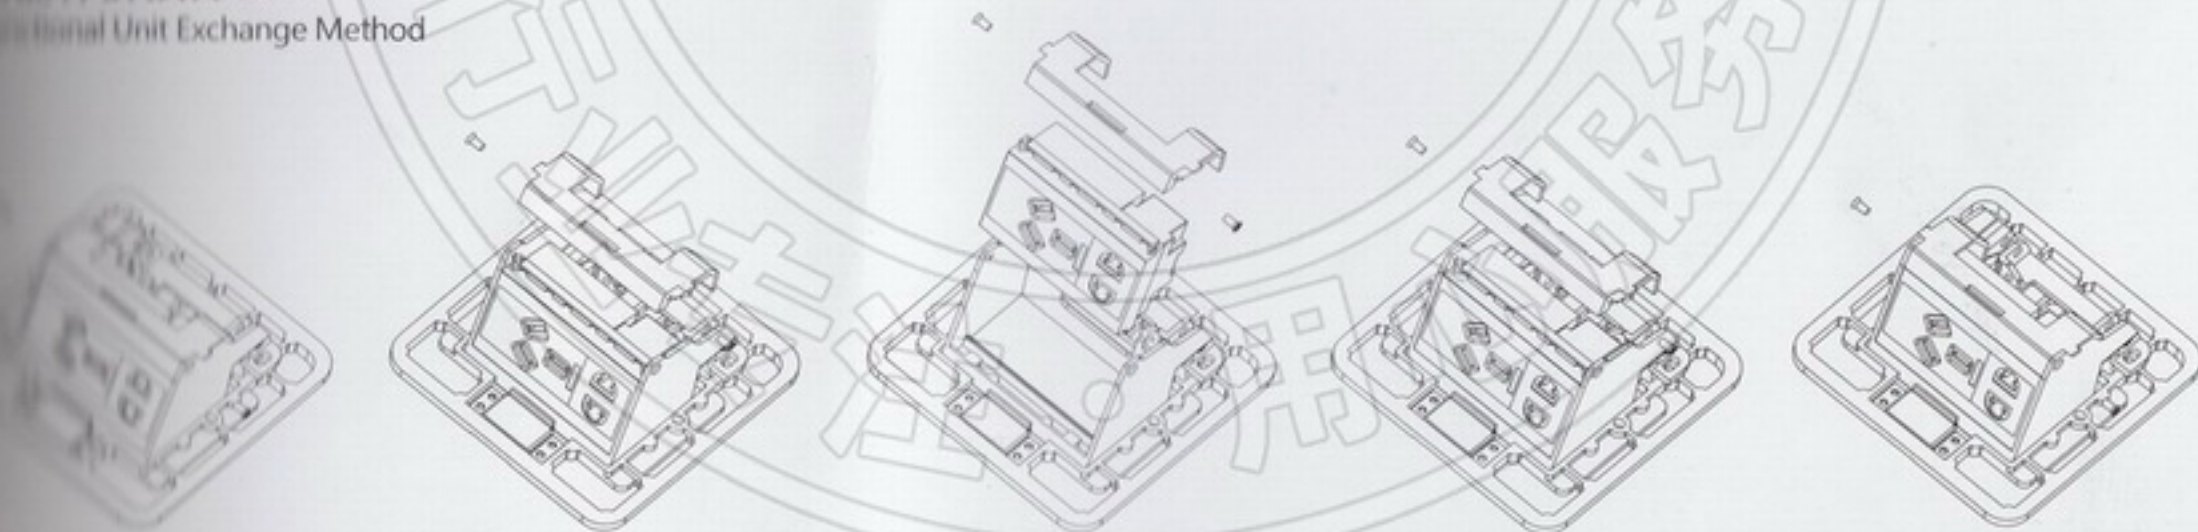

[Http://www.china-joho.com](http://www.china-joho.com)



浙江锦豪电器有限公司

ZHEJIANG JINHAO ELECTRICAL CO.,LTD

地址：浙江省乐清市柳市新光工业区 邮编(P.C):325604

详情请联系当地经销商
Please contact with local distributor for detailed information

行业最大的电子样本库

插座网本着“行业专注、用心服务”的理念为用户提供电子样本在线翻阅、在线打印、下载等专业化、个性化服务

