



YEEDA ELECTRIC



中美合资
怡达电气(苏州)有限公司

YEEDA ELECTRIC (SUZHOU) CO., LTD.

年年月月
我们都在讲述着同一个故事
YEEDA 怡达——品质的象征……

企业简介

怡达电气（苏州）有限公司是由美国怡达国际有限公司控股的中美合资企业，公司坐落于著名的苏州工业园区，地理位置优越，交通便利。

公司引进了美国怡达国际有限公司的先进技术和管理经验，专业生产工业用插头、插座和耦合器以及组合式配电插座箱等，产品具有良好的防尘、防水、耐温、耐寒等优点，广泛使用于钢铁工业、石油化工、电力设施、机床设备、塑料机械、影视器材、建筑工地及机场码头等领域。

历经近十年不断的发展和创新，公司在工业插接器领域确立了重要的地位。2001年10月公司通过英国SGS认证机构的ISO9001:2000国际质量管理体系认证，相关产品已通过了CCC认证、CE认证和CB测试等，其质量得到了权威认证机构和新老客户的一致认可。

秉承“质量第一、客户至上”的企业宗旨，“高起点、高标准、高品质”的经营理念，我们真诚期待着为您提供专业化的产品和高质量的服务！

Years and years
We make the same promise
YEEDA—Symbol of Quality Excellence!

A Brief Introduction to the Company

A Sino-US joint venture enterprise with the US Yeeda International Co., Ltd. as its holding company, the Yeeda Electrical (Suzhou) Co., Ltd. is situated in the well-known Suzhou Industrial Park, in an advantageous geographical location with convenient communication conditions.

Having introduced the advanced technique and management experience of the US Yeeda International Co., Ltd., the company is specialized in the production of industrial-purpose plugs, sockets and couplers as well as modular power-distributing socket boxes and so on; the products, with good dustproof, waterproof, heat-resisting, cold-resisting and other strong points, are widely used in iron and steel industry, petroleum chemical industry, power facilities, machine tool equipment, plastic machinery, visual display apparatus, construction sites, airports and wharfs and other fields.

Experiencing nearly ten years of incessant development and innovation, the company has established an important position for itself in the field of industrial-purpose connector assemblies. In October 2001, the company passed the ISO9001: 2000 International Quality Management System Certification of the UK SGS Certifier, its related products have passed CCC Certification, CE Certification and CB test, and their quality has been accepted unanimously by authoritative organizations as well as old and new customers.

In accordance with the enterprise general purpose of "quality and service is always the first" as well as the operation idea of "high startpoint, high standard and high quality", we sincerely expect to provide you with specialized products and high-quality service!



怡达插头插座

YEEDA PLUGS AND SOCKETS

质量方针 QUALITY POLICY

质量第一 客户至上

QUALITY AND SERVICE IS ALWAYS THE FIRST

质量目标 QUALITY OBJECTIVE


产品出厂100%合格
客户投诉100%解决

Ensure only the approved products leaving the factory
Ensure customer's complaint 100% being solved



ISO9001:2000

SGS



结构示意

Structure demonstration



技术参数

◇适用于各种工业用的电源插接装置。其额定电压交流不超过690V，直流不超过440V，额定电流不超过125A，额定频率不超过500Hz。

◇适用于户内或户外场所，防护等级为IP44、IP54和IP67，具有优良的防尘埃、防水溅及防水性能

◇使用环境温度为-25℃ - +40℃的无腐蚀和爆炸性气体及导电尘埃的地方。

◇技术先进，结构合理，性能优越，具有耐寒、耐热、耐油、耐燃、抗冲击、抗老化、防脱落、防误插，以及绝缘性能高和电极接触好等优点。

◇共有额定电流16A、32A、63A和125A，三芯、四芯、五芯、七芯近100个品种。

◇符合IEC60309-1/-2、GB/T11918-11919等标准。

Technical Data

◇ wide application scope, rated voltage up to 690V(AC) or 440V(DC), rated current up to 125A, rated frequency up to 500Hz

◇ capable of operation both indoors and outdoors, IP44, IP54 and IP67 protection classes, superior characteristics of dust, water and splash proof.

◇ Temperature range -25℃ to +40℃, where no explosive gas or conductive dust shall exist.

◇ State of the art technology, rational construction, excellent performance, high(low) temperature-resistance, oil-resistance, fire-retardant, shock proof, aging-resistance, pull off-prevention, fault inserting prevention, extremely good insulation and good connection.

◇ Nearly 100 specifications, such as rated current 16A, 32A, 63A and 125A, 3, 4, 5 x poles.

◇ Produced in accordance with IEC60309-1/-2 GB/T11918-11919 standards.

颜色编码和接地销位置


所有怡达插头插座均按照IEC60309-1/-2、GB/T11918-11919等标准，以颜色区分不同的电压和频率。产品内部键槽保证插销的正确对准。接地插销的位置相对于插座键槽用钟点位置命名，即数字后面加上字母h来表示。

接地插销比其他插销直径要大些，所以它不可能插入同一个插座的其他插套中。

Color Coding & Ground Pin Positions

Yeeda plugs and sockets were in accordance with IEC60309-1/-2, GB/T11918-11919 standards. Differentiate rated voltage and frequency with color. The product's interior key ways ensure correct alignment of bolt. The position of the ground pin relative to the socket's key ways is designated as a clock hour position(show it with figure add h).

The ground bolt also has a larger diameter than bolt, making it impossible to insert plug bush with the same socket.

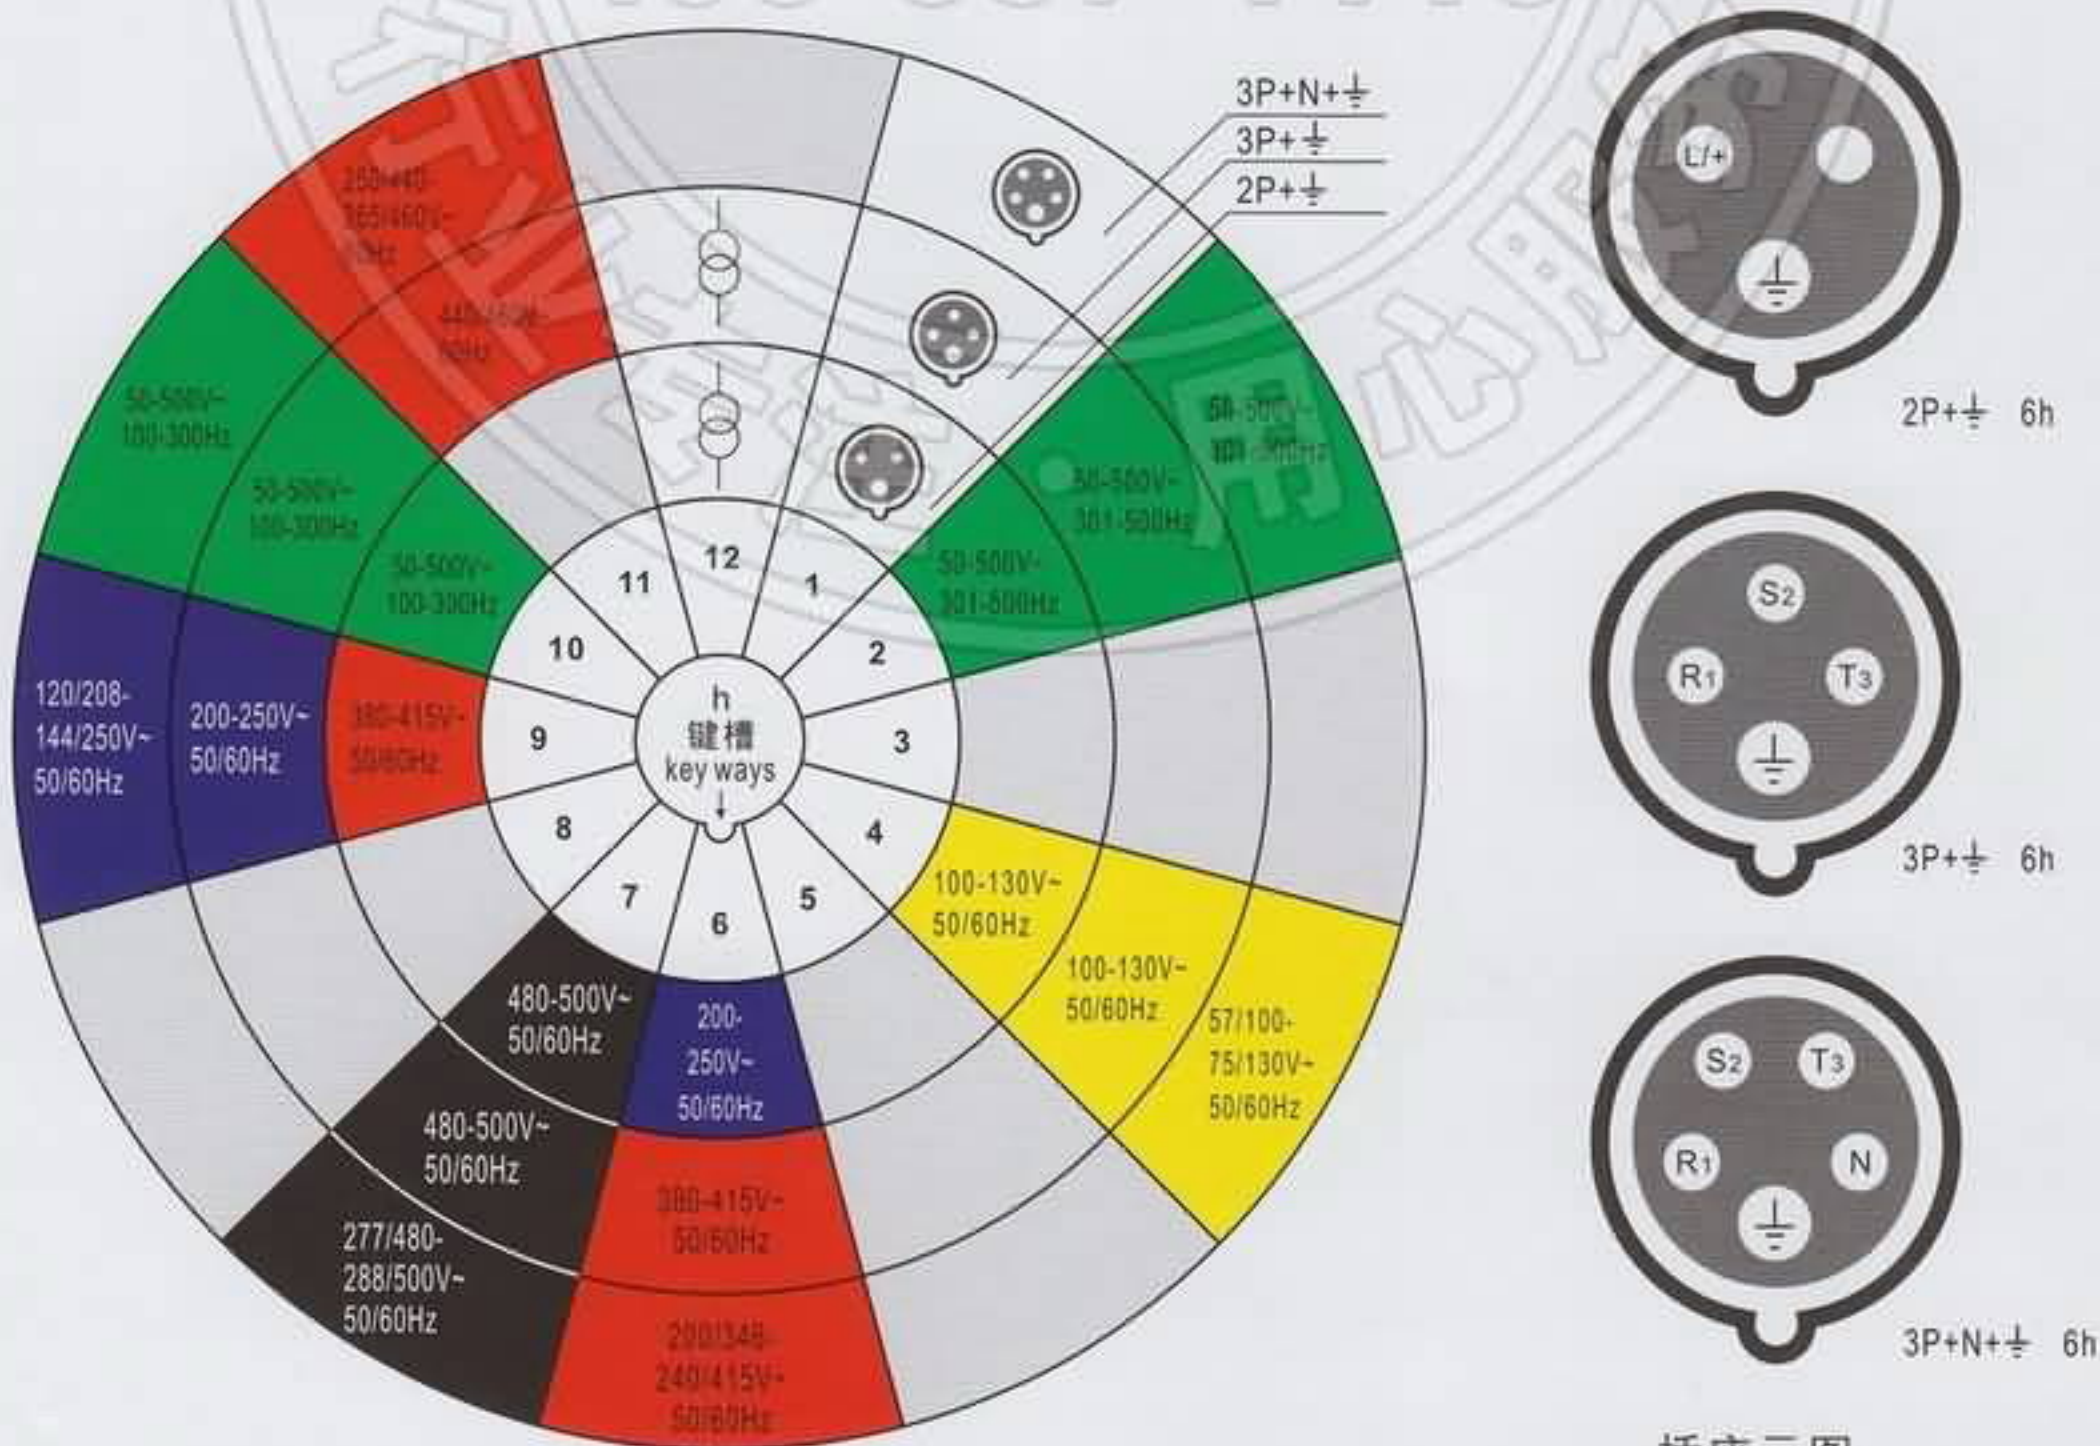

插座示图

SOCKET DRAWING



怡达插头插座

YEEDA PLUGS AND SOCKETS


符合IEC60309-1/-2、GB/T11918-11919标准
Conform to IEC60309-1/-2, GB/T11918-11919 standards

额定工作电压、频率与颜色的对应关系
The relation between rated voltage, frequency and color

100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A 2P+ 三芯 3-wire	100-130V~	50/60Hz	1131104	黄 Yellow	32A 2P+ 三芯 3-wire	100-130V~	50/60Hz	1231104	黄 Yellow
	200-250V~	50/60Hz	1131106	蓝 Blue		200-250V~	50/60Hz	1231106	蓝 Blue
	380-415V~	50/60Hz	1131109	红 Red		380-415V~	50/60Hz	1231109	红 Red
	500V~	50/60Hz	1131107	黑 Black		500V~	50/60Hz	1231107	黑 Black
	50-500V~	100-300Hz	1131110	绿 Green		50-500V~	100-300Hz	1231110	绿 Green
	50-500V~	301-500Hz	1131102	绿 Green		50-500V~	301-500Hz	1231102	绿 Green
16A 3P+ 四芯 4-wire	100-130V~	50/60Hz	1141104	黄 Yellow	32A 3P+ 四芯 4-wire	100-130V~	50/60Hz	1241104	黄 Yellow
	200-250V~	50/60Hz	1141109	蓝 Blue		200-250V~	50/60Hz	1241109	蓝 Blue
	380-415V~	50/60Hz	1141106	红 Red		380-415V~	50/60Hz	1241106	红 Red
	500V~	50/60Hz	1141107	黑 Black		500V~	50/60Hz	1241107	黑 Black
	50-500V~	100-300Hz	1141110	绿 Green		50-500V~	100-300Hz	1241110	绿 Green
	50-500V~	301-500Hz	1141102	绿 Green		50-500V~	301-500Hz	1241102	绿 Green
16A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	1151104	黄 Yellow	32A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	1251104	黄 Yellow
	200-250V~	50/60Hz	1151109	蓝 Blue		200-250V~	50/60Hz	1251109	蓝 Blue
	380-415V~	50/60Hz	1151106	红 Red		380-415V~	50/60Hz	1251106	红 Red
	500V~	50/60Hz	1151107	黑 Black		500V~	50/60Hz	1251107	黑 Black
	50-500V~	100-300Hz	1151110	绿 Green		50-500V~	100-300Hz	1251110	绿 Green
	50-500V~	301-500Hz	1151102	绿 Green		50-500V~	301-500Hz	1251102	绿 Green

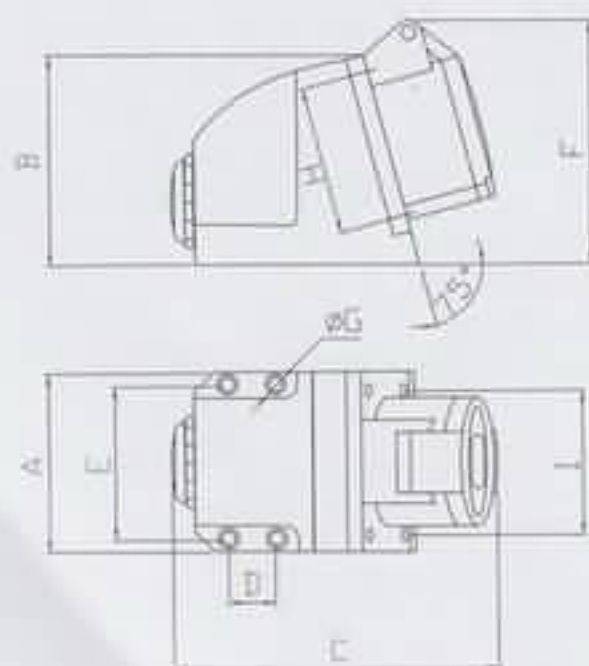

尺寸简图
DIMENSIONS CHART

类别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
16A三芯	70	80	129	18	55	86	5.5	56	56
16A四芯	70	80	130	18	55	89	5.5	56	56
16A五芯	70	80	131	18	55	92	5.5	56	56
32A三芯	80	90	146	20	65	101	5.5	64	64
32A四芯	80	90	146	20	65	101	5.5	64	64
32A五芯	80	90	146	20	65	105	5.5	64	64


符合IEC60309-1/-2、GB/T11918-11919标准
Conform to IEC60309-1/-2, GB/T11918-11919 standards

额定工作电压、频率与颜色的对应关系
The relation between rated voltage, frequency and color

100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A 2P+ 三芯 3-wire	100-130V~	50/60Hz	1132104	黄 Yellow	32A 2P+ 三芯 3-wire	100-130V~	50/60Hz	1232104	黄 Yellow
	200-250V~	50/60Hz	1132106	蓝 Blue		200-250V~	50/60Hz	1232106	蓝 Blue
	380-415V~	50/60Hz	1132109	红 Red		380-415V~	50/60Hz	1232109	红 Red
	500V~	50/60Hz	1132107	黑 Black		500V~	50/60Hz	1232107	黑 Black
	50-500V~	100-300Hz	1132110	绿 Green		50-500V~	100-300Hz	1232110	绿 Green
	50-500V~	301-500Hz	1132102	绿 Green		50-500V~	301-500Hz	1232102	绿 Green
16A 3P+ 四芯 4-wire	100-130V~	50/60Hz	1142104	黄 Yellow	32A 3P+ 四芯 4-wire	100-130V~	50/60Hz	1242104	黄 Yellow
	200-250V~	50/60Hz	1142109	蓝 Blue		200-250V~	50/60Hz	1242109	蓝 Blue
	380-415V~	50/60Hz	1142106	红 Red		380-415V~	50/60Hz	1242106	红 Red
	500V~	50/60Hz	1142107	黑 Black		500V~	50/60Hz	1242107	黑 Black
	50-500V~	100-300Hz	1142110	绿 Green		50-500V~	100-300Hz	1242110	绿 Green
	50-500V~	301-500Hz	1142102	绿 Green		50-500V~	301-500Hz	1242102	绿 Green
16A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	1152104	黄 Yellow	32A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	1252104	黄 Yellow
	200-250V~	50/60Hz	1152109	蓝 Blue		200-250V~	50/60Hz	1252109	蓝 Blue
	380-415V~	50/60Hz	1152106	红 Red		380-415V~	50/60Hz	1252106	红 Red
	500V~	50/60Hz	1152107	黑 Black		500V~	50/60Hz	1252107	黑 Black
	50-500V~	100-300Hz	1152110	绿 Green		50-500V~	100-300Hz	1252110	绿 Green
	50-500V~	301-500Hz	1152102	绿 Green		50-500V~	301-500Hz	1252102	绿 Green

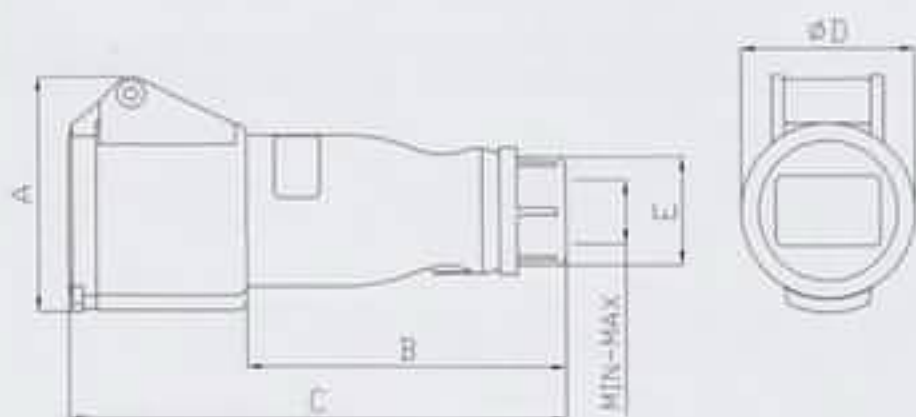

尺寸简图
DIMENSIONS CHART

类别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	MIN	MAX
16A三芯	70	92	142	51	32	7.5	16
16A四芯	76	92	142	57.5	32	7.5	16
16A五芯	83	105	157	65	32	7.5	16
32A三芯	87	110	171	66	39	11	22
32A四芯	87	110	171	66	39	11	22
32A五芯	93	118	178	72.5	39	11	22


符合IEC60309-1/-2、GB/T11918-11919标准
Conform to IEC60309-1/-2, GB/T11918-11919 standards

额定工作电压、频率与颜色的对应关系
The relation between rated voltage, frequency and color

100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A 2P+ 三芯 3-wire	100-130V~	50/60Hz	0130104	黄 Yellow	32A 2P+ 三芯 3-wire	100-130V~	50/60Hz	0230104	黄 Yellow
	200-250V~	50/60Hz	0130106	蓝 Blue		200-250V~	50/60Hz	0230106	蓝 Blue
	380-415V~	50/60Hz	0130109	红 Red		380-415V~	50/60Hz	0230109	红 Red
	500V~	50/60Hz	0130107	黑 Black		500V~	50/60Hz	0230107	黑 Black
	50-500V~	100-300Hz	0130110	绿 Green		50-500V~	100-300Hz	0230110	绿 Green
	50-500V~	301-500Hz	0130102	绿 Green		50-500V~	301-500Hz	0230102	绿 Green
16A 3P+ 四芯 4-wire	100-130V~	50/60Hz	0140104	黄 Yellow	32A 3P+ 四芯 4-wire	100-130V~	50/60Hz	0240104	黄 Yellow
	200-250V~	50/60Hz	0140109	蓝 Blue		200-250V~	50/60Hz	0240109	蓝 Blue
	380-415V~	50/60Hz	0140106	红 Red		380-415V~	50/60Hz	0240106	红 Red
	500V~	50/60Hz	0140107	黑 Black		500V~	50/60Hz	0240107	黑 Black
	50-500V~	100-300Hz	0140110	绿 Green		50-500V~	100-300Hz	0240110	绿 Green
	50-500V~	301-500Hz	0140102	绿 Green		50-500V~	301-500Hz	0240102	绿 Green
16A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0150104	黄 Yellow	32A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0250104	黄 Yellow
	200-250V~	50/60Hz	0150109	蓝 Blue		200-250V~	50/60Hz	0250109	蓝 Blue
	380-415V~	50/60Hz	0150106	红 Red		380-415V~	50/60Hz	0250106	红 Red
	500V~	50/60Hz	0150107	黑 Black		500V~	50/60Hz	0250107	黑 Black
	50-500V~	100-300Hz	0150110	绿 Green		50-500V~	100-300Hz	0250110	绿 Green
	50-500V~	301-500Hz	0150102	绿 Green		50-500V~	301-500Hz	0250102	绿 Green

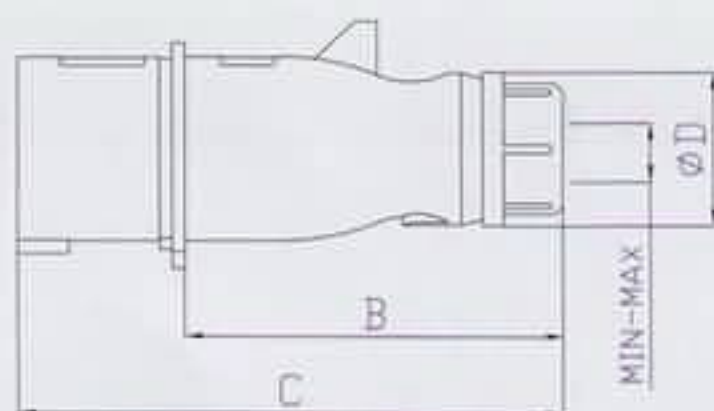

尺寸简图
DIMENSIONS CHART

类别 TYPE	尺寸 DIMENSIONS (mm)					
	A	B	C	D	MIN	MAX
16A三芯	51	89	129	32	8	16
16A四芯	57.5	89	129	33	8	16
16A五芯	65	106	146	33	8	16
32A三芯	68	110	159	38.5	12	22
32A四芯	68	110	159	38.5	12	22
32A五芯	74.5	120	159	38.5	12	22

符合IEC60309-1/-2、GB/T11918-11919标准

Conform to IEC60309-1/-2, GB/T11918-11919 standards


额定工作电压、频率与颜色的对应关系

The relation between rated voltage, frequency and color

100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A 2P+ 三芯 3-wire	100-130V~	50/60Hz	0136104	黄 Yellow	32A 2P+ 三芯 3-wire	100-130V~	50/60Hz	0236104	黄 Yellow
	200-250V~	50/60Hz	0136106	蓝 Blue		200-250V~	50/60Hz	0236106	蓝 Blue
	380-415V~	50/60Hz	0136109	红 Red		380-415V~	50/60Hz	0236109	红 Red
	500V~	50/60Hz	0136107	黑 Black		500V~	50/60Hz	0236107	黑 Black
	50-500V~	100-300Hz	0136110	绿 Green		50-500V~	100-300Hz	0236110	绿 Green
	50-500V~	301-500Hz	0136102	绿 Green		50-500V~	301-500Hz	0236102	绿 Green
16A 3P+ 四芯 4-wire	100-130V~	50/60Hz	0146104	黄 Yellow	32A 3P+ 四芯 4-wire	100-130V~	50/60Hz	0246104	黄 Yellow
	200-250V~	50/60Hz	0146109	蓝 Blue		200-250V~	50/60Hz	0246109	蓝 Blue
	380-415V~	50/60Hz	0146106	红 Red		380-415V~	50/60Hz	0246106	红 Red
	500V~	50/60Hz	0146107	黑 Black		500V~	50/60Hz	0246107	黑 Black
	50-500V~	100-300Hz	0146110	绿 Green		50-500V~	100-300Hz	0246110	绿 Green
	50-500V~	301-500Hz	0146102	绿 Green		50-500V~	301-500Hz	0246102	绿 Green
16A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0156104	黄 Yellow	32A 3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0256104	黄 Yellow
	200-250V~	50/60Hz	0156109	蓝 Blue		200-250V~	50/60Hz	0256109	蓝 Blue
	380-415V~	50/60Hz	0156106	红 Red		380-415V~	50/60Hz	0256106	红 Red
	500V~	50/60Hz	0156107	黑 Black		500V~	50/60Hz	0256107	黑 Black
	50-500V~	100-300Hz	0156110	绿 Green		50-500V~	100-300Hz	0256110	绿 Green
	50-500V~	301-500Hz	0156102	绿 Green		50-500V~	301-500Hz	0256102	绿 Green

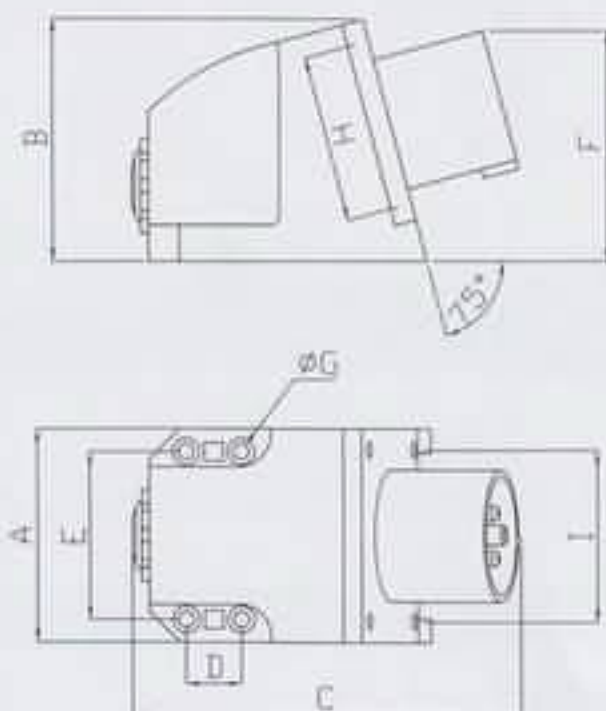

尺寸简图
DIMENSIONS CHART

类别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
16A三芯	70	78	132	18	55	75	5.5	56	56
16A四芯	70	78	132	18	55	78	5.5	56	56
16A五芯	70	78	132	18	55	81	5.5	56	56
32A三芯	80	90	152	20	65	90	5.5	64	64
32A四芯	80	90	152	20	65	90	5.5	64	64
32A五芯	80	90	152	20	65	93	5.5	64	64

符合IEC60309-1/-2、GB/T11918-11919标准

Conform to IEC60309-1/-2, GB/T11918-11919 standards


额定工作电压、频率与颜色的对应关系

The relation between rated voltage, frequency and color

100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A  2P+ 三芯 3-wire	100-130V~	50/60Hz	0137104	黄 Yellow	32A  2P+ 三芯 3-wire	100-130V~	50/60Hz	0237104	黄 Yellow
	200-250V~	50/60Hz	0137106	蓝 Blue		200-250V~	50/60Hz	0237106	蓝 Blue
	380-415V~	50/60Hz	0137109	红 Red		380-415V~	50/60Hz	0237109	红 Red
	500V~	50/60Hz	0137107	黑 Black		500V~	50/60Hz	0237107	黑 Black
	50-500V~	100-300Hz	0137110	绿 Green		50-500V~	100-300Hz	0237110	绿 Green
	50-500V~	301-500Hz	0137102	绿 Green		50-500V~	301-500Hz	0237102	绿 Green
16A  3P+ 四芯 4-wire	100-130V~	50/60Hz	0147104	黄 Yellow	32A  3P+ 四芯 4-wire	100-130V~	50/60Hz	0247104	黄 Yellow
	200-250V~	50/60Hz	0147109	蓝 Blue		200-250V~	50/60Hz	0247109	蓝 Blue
	380-415V~	50/60Hz	0147109	红 Red		380-415V~	50/60Hz	0247106	红 Red
	500V~	50/60Hz	0147107	黑 Black		500V~	50/60Hz	0247107	黑 Black
	50-500V~	100-300Hz	0147110	绿 Green		50-500V~	100-300Hz	0247110	绿 Green
	50-500V~	301-500Hz	0147102	绿 Green		50-500V~	301-500Hz	0247102	绿 Green
16A  3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0157104	黄 Yellow	32A  3P+N+ 五芯 5-wire	100-130V~	50/60Hz	0257104	黄 Yellow
	200-250V~	50/60Hz	0157109	蓝 Blue		200-250V~	50/60Hz	0257109	蓝 Blue
	380-415V~	50/60Hz	0157106	红 Red		380-415V~	50/60Hz	0257106	红 Red
	500V~	50/60Hz	0157107	黑 Black		500V~	50/60Hz	0257107	黑 Black
	50-500V~	100-300Hz	0157110	绿 Green		50-500V~	100-300Hz	0257110	绿 Green
	50-500V~	301-500Hz	0157102	绿 Green		50-500V~	301-500Hz	0257102	绿 Green

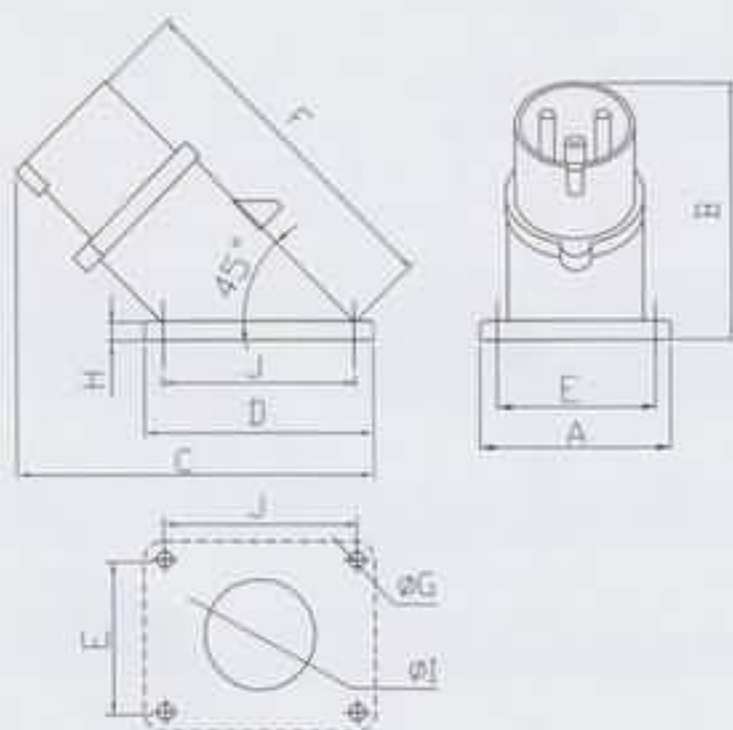

尺寸简图
DIMENSIONS CHART

类别 TYPE	尺寸 DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	J
16A三芯	80	101	143	94	64	136	5.5	7	40	78
16A四芯	80	103	145	94	64	139	5.5	7	40	78
16A五芯	80	106	148	94	64	142	5.5	7	40	78
32A三芯	80	112	156	94	64	152	5.5	7	40	78
32A四芯	80	112	156	94	64	152	5.5	7	40	78
32A五芯	80	115	158	94	64	152	5.5	7	40	78



怡达插头插座

YEEDA PLUGS AND SOCKETS

符合IEC60309-1/-2、GB/T11918-11919标准
Conform to IEC60309-1/-2, GB/T11918-11919 standards

额定工作电压、频率与颜色的对应关系
The relation between rated voltage, frequency and color


100-130V~ 50/60Hz	200-250V~ 50/60Hz	380-415V~ 50/60Hz	500V~ 50/60Hz	50-500V~ 100-300Hz	50-500V~ 301-500Hz
----------------------	----------------------	----------------------	------------------	-----------------------	-----------------------



IP44

装置直插头
PANEL MOUNTING STRAIGHT PLUG

类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR	类别 TYPE	电压 VOLTAGE	频率 FREQUENCY	订货编号 ORDER No.	颜色 COLOR
16A 2P+≡ 三芯 3-wire	100-130V~	50/60Hz	0138104	黄 Yellow	32A 2P+≡ 三芯 3-wire	100-130V~	50/60Hz	0238104	黄 Yellow
	200-250V~	50/60Hz	0138106	蓝 Blue		200-250V~	50/60Hz	0238106	蓝 Blue
	380-415V~	50/60Hz	0138109	红 Red		380-415V~	50/60Hz	0238109	红 Red
	500V~	50/60Hz	0138107	黑 Black		500V~	50/60Hz	0238107	黑 Black
	50-500V~	100-300Hz	0138110	绿 Green		50-500V~	100-300Hz	0238110	绿 Green
	50-500V~	301-500Hz	0138102	绿 Green		50-500V~	301-500Hz	0238102	绿 Green
16A 3P+≡ 四芯 4-wire	100-130V~	50/60Hz	0148104	黄 Yellow	32A 3P+≡ 四芯 4-wire	100-130V~	50/60Hz	0248104	黄 Yellow
	2200-250V~	50/60Hz	0148109	蓝 Blue		200-250V~	50/60Hz	0248109	蓝 Blue
	380-415V~	50/60Hz	0148106	红 Red		380-415V~	50/60Hz	0248106	红 Red
	500V~	50/60Hz	0148107	黑 Black		500V~	50/60Hz	0248107	黑 Black
	50-500V~	100-300Hz	0148110	绿 Green		50-500V~	100-300Hz	0248110	绿 Green
	50-500V~	301-500Hz	0148102	绿 Green		50-500V~	301-500Hz	0248102	绿 Green
16A 3P+N+≡ 五芯 5-wire	100-130V~	50/60Hz	0158104	黄 Yellow	32A 3P+N+≡ 五芯 5-wire	100-130V~	50/60Hz	0258104	黄 Yellow
	200-250V~	50/60Hz	0158109	蓝 Blue		200-250V~	50/60Hz	0258109	蓝 Blue
	380-415V~	50/60Hz	0158106	红 Red		380-415V~	50/60Hz	0258106	红 Red
	500V~	50/60Hz	0158107	黑 Black		500V~	50/60Hz	0258107	黑 Black
	50-500V~	100-300Hz	0158110	绿 Green		50-500V~	100-300Hz	0258110	绿 Green
	50-500V~	301-500Hz	0158102	绿 Green		50-500V~	301-500Hz	0258102	绿 Green

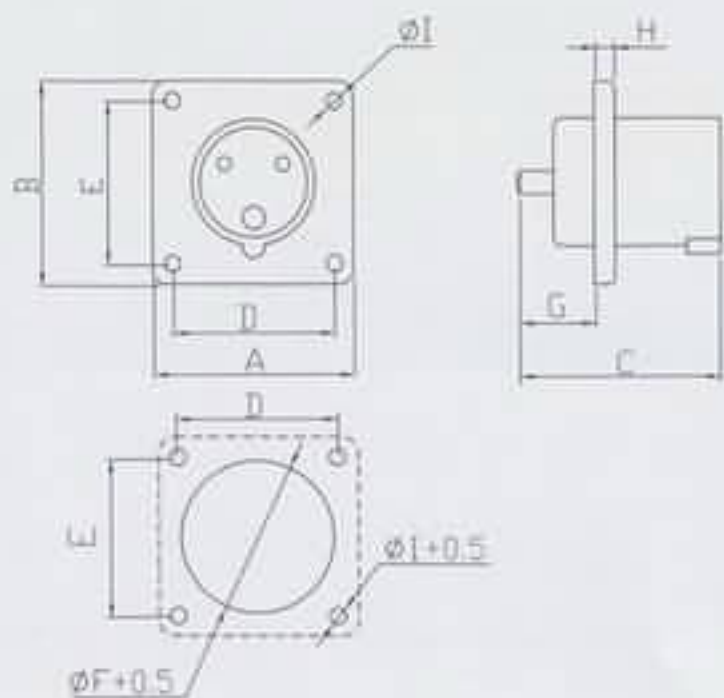

尺寸简图
DIMENSIONS CHART


类别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
16A三芯	70	70	70	56	56	56	26	7	5.5
16A四芯	70	70	70	56	56	56	26	7	5.5
16A五芯	70	70	70	56	56	56	26	7	5.5
32A三芯	80	80	85	64	64	65	31	8	5.5
32A四芯	80	80	85	64	64	65	31	8	5.5
32A五芯	80	80	85	64	64	65	31	8	5.5

符合IEC60309-1/-2、GB/T11918-11919标准 Conform to IEC60309-1/-2, GB/T11918-11919 standards

防护等级: IP67

IP67 Protection class

名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 ORDER NO.	颜色 COLOR
 插头 Plug	16A 2P+ $\frac{\text{—}}{\text{—}}$ 三芯3-wire	110-130V~	0130204	黄色Yellow
	32A 2P+ $\frac{\text{—}}{\text{—}}$ 三芯3-wire	110-130V~	0230204	黄色Yellow
 插头 Plug	16A 2P+ $\frac{\text{—}}{\text{—}}$ 三芯3-wire	200-250V~	0130206	蓝色Blue
	32A 2P+ $\frac{\text{—}}{\text{—}}$ 三芯3-wire	200-250V~	0230206	蓝色Blue
 插头 Plug	16A 3P+ $\frac{\text{—}}{\text{—}}$ 四芯4-wire	380-415V~	0140206	红色Red
	32A 3P+ $\frac{\text{—}}{\text{—}}$ 四芯4-wire	380-415V~	0240206	红色Red
 插头 Plug	16A 3P+N+ $\frac{\text{—}}{\text{—}}$ 五芯5-wire	220-415V~	0150206	红色Red
	32A 3P+N+ $\frac{\text{—}}{\text{—}}$ 五芯5-wire	220-415V~	0250206	红色Red

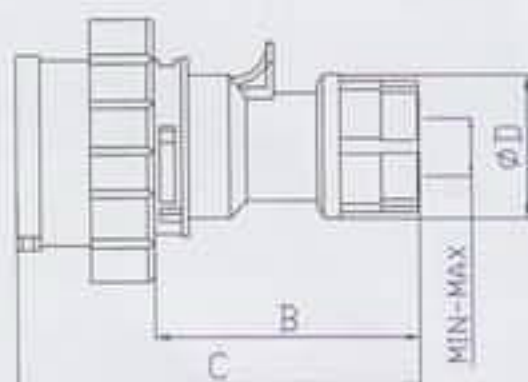

类别 TYPE	尺寸 DIMENSIONS (mm)					
	A	B	C	D	MIN	MAX
16A三芯	70	58	109	42	5.4	14
16A四芯	78.5	65	115	42	5.4	14
16A五芯	86.5	88	126	45.2	6	16.1
32A三芯	93	72	135	54	10.5	20
32A四芯	93	72	135	54	10.5	20
32A五芯	99	79	141	54	10.5	20

符合IEC60309-1/-2、GB/T11918-11919标准

Conform to IEC60309-1/-2, GB/T11918-11919 standards


防护等级: IP67

IP67 Protection class


名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 ORDER NO.		颜色 COLOR
			16A	32A	
 插座 Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1131206	1231206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1141206	1241206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1151206	1251206	红色Red
 连接插座 Movable Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1132206	1232206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1142206	1242206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1152206	1252206	红色Red
 暗装直插座 Panel Mounting Straight Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1133206	1233206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1143206	1243206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1153206	1253206	红色Red



类别 TYPE	尺寸 DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	
16A三芯	80	86	168	47	70	98	5	61	61	
16A四芯	80	86	188	47	70	103	5	61	61	
16A五芯	80	86	190	47	70	106	5	61	61	
32A三芯	80	86	200	47	70	114	5	61	61	
32A四芯	80	86	200	47	70	114	5	61	61	
32A五芯	80	86	202	47	70	115	5	61	61	

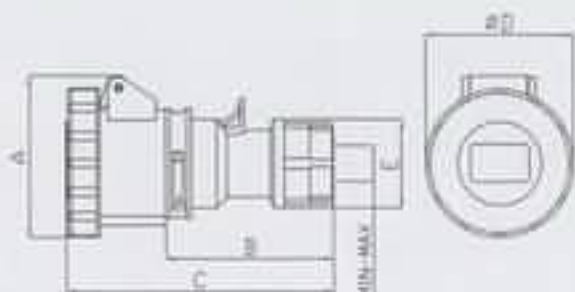

类别 TYPE	尺寸 DIMENSIONS (mm)							
	A	B	C	D	E	MIN	MAX	
16A三芯	79	68	120	70	41.5	6	14	
16A四芯	84	83	135	79.5	42	6	15	
16A五芯	92	87	141	86.5	45.2	6	16	
32A三芯	98	83	149	93	54	10	20	
32A四芯	98	83	149	93	54	10	20	
32A五芯	102	99	165	99	54	10	22	

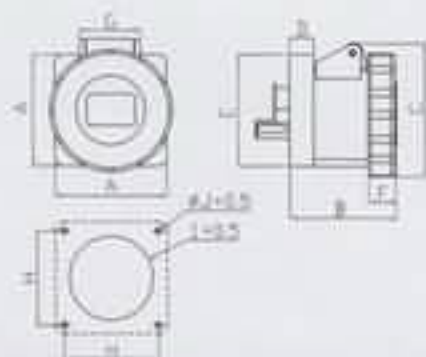

类别 TYPE	尺寸 DIMENSIONS (mm)									
	A	B	C	D	E	F	G	H	I	J
16A三芯	76	63	78	10	75	21	33	60	60	5.5
16A四芯	76	63	84	10	75	21	33	60	60	5.5
16A五芯	76	63	92	10	75	21	33	60	60	5.5
32A三芯	76	73	96	10	75	22	33	60	60	5.5
32A四芯	76	73	96	10	75	22	33	60	60	5.5
32A五芯	76	73	102	10	75	22	33	60	60	5.5

符合IEC60309-1/-2、GB/T11918-11919标准 Conform to IEC60309-1/-2, GB/T11918-11919 standards


防护等级: IP67

IP67 Protection class


名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 ORDER NO.		颜色 COLOR
			63A	125A	
 插头 Plug	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	0330206	0430206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	0340206	0440206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	0350206	0450206	红色Red
 明装插头 Surface Mounting Plug	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	0336206	0436206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	0346206	0446206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	0356206	0456206	红色Red
 装置直插头 Panel Mounting Straight Plug	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	0338206	0438206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	0348206	0448206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	0358206	0458206	红色Red



类别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	F	G
63A三芯	230	76	75	36	56	8	10
63A四芯	230	76	75	36	56	8	10
63A五芯	230	76	75	36	56	8	10
125A三芯	297	85	88	64	61	10	12
125A四芯	297	85	88	64	61	10	12
125A五芯	297	85	88	64	61	10	12

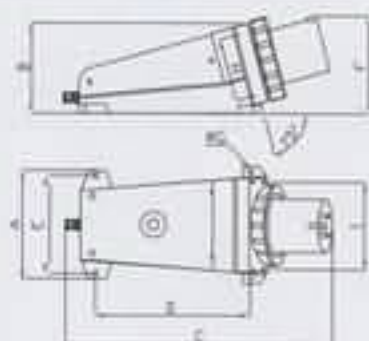

类别 TYPE	尺寸 DIMENSIONS (mm)								
	A	B	C	D	E	F	G	H	I
63A三芯	122	101	307	157	109	126	6	80	80
63A四芯	122	101	307	157	109	126	6	80	80
63A五芯	122	101	307	157	109	126	6	80	80
125A三芯	140	120	350	185	130	145	8	100	100
125A四芯	140	120	350	185	130	145	8	100	100
125A五芯	140	120	350	185	130	145	8	100	100

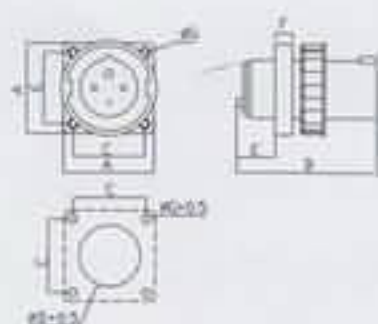

类别 TYPE	尺寸 DIMENSIONS (mm)						
	A	B	C	D	E	F	G
63A三芯	100	128	80	75	20	10	6.5
63A四芯	100	128	80	75	20	10	6.5
63A五芯	100	128	80	75	20	10	6.5
125A三芯	120	122	100	100	22	12	6.5
125A四芯	120	122	100	100	22	12	6.5
125A五芯	120	122	100	100	22	12	6.5


符合IEC60309-1/-2、GB/T11918-11919标准

Conform to IEC60309-1/-2, GB/T11918-11919 standards

防护等级: IP67

IP67 Protection class

名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 63A	ORDER NO. 125A	颜色 COLOR
 插座 Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1331206	1431206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1341206	1441206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1351206	1451206	红色Red
 连接插座 Movable Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1332206	1432206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1342206	1442206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1352206	1452206	红色Red
 暗装直插座 Panel Mounting Straight Socket	2P+ $\frac{1}{2}$ 三芯3-wire	200-250V~	1333206	1433206	蓝色Blue
	3P+ $\frac{1}{2}$ 四芯4-wire	380-415V~	1343206	1443206	红色Red
	3P+N+ $\frac{1}{2}$ 五芯5-wire	220-415V~	1353206	1453206	红色Red

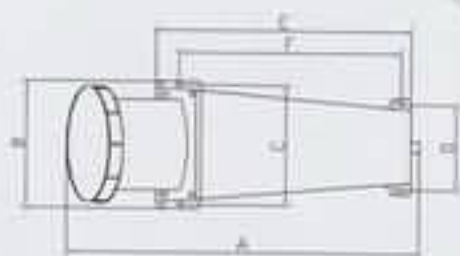

类别
TYPE

尺寸 DIMENSIONS (mm)


	A	B	C	D	E	F
63A三芯	298	125	109	109	191	158
63A四芯	298	125	109	109	191	158
63A五芯	298	125	109	109	191	158
125A三芯	350	146	130	130	220	187
125A四芯	350	146	130	130	220	187
125A五芯	350	146	130	130	220	187



类别
TYPE

尺寸 DIMENSIONS (mm)

	A	B	C	D	E	MIN	MAX
63A三芯	112	158	240	108.2	36	15	29
63A四芯	112	158	240	108.2	36	15	29
63A五芯	112	158	240	108.2	36	15	29
125A三芯	128	210	300	122	64	25	49
125A四芯	128	210	300	122	64	25	49
125A五芯	128	210	300	122	64	25	49

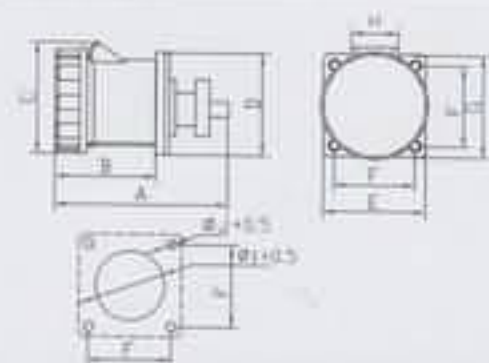

类别
TYPE

尺寸 DIMENSIONS (mm)




	A	B	C	D	E	F	G	H	I	J
63A三芯	140	82	112	98	98	78	98	48	75	6.5
63A四芯	140	82	112	98	98	78	98	48	75	6.5
63A五芯	140	82	112	98	98	78	98	48	75	6.5
125A三芯	158	88	131	120	120	100	120	48	100	6.5
125A四芯	158	88	131	120	120	100	120	48	100	6.5
125A五芯	158	88	131	120	120	100	120	48	100	6.5

符合IEC60884-1:2002等标准

Conform to IEC60884-1:2002 standard

防护等级: IP54

IP54 Protection class

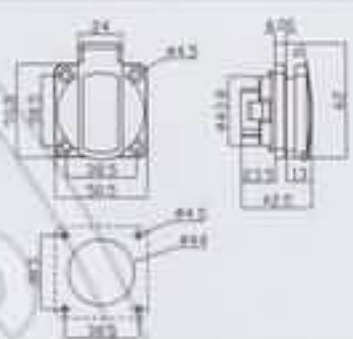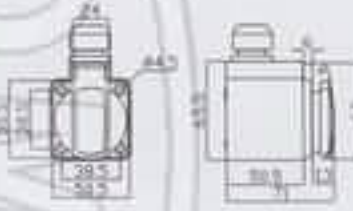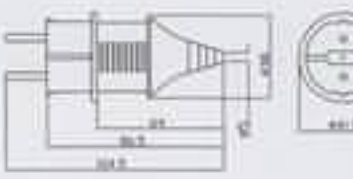名称 NAME	类别 TYPE	电压 VOLTAGE	订货编号 ORDER NO.	颜色 COLOR	尺寸简图 DIMENSIONS CHART
	插座 Socket	16A 2P+ $\frac{1}{2}$ 二芯2-wire	250V~ 1123106	任选 Free	
	明装插座 Surface Mounting Socket	16A 2P+ $\frac{1}{2}$ 二芯2-wire	250V~ 1121106	任选 Free	
	连接插座 Movable Socket	16A 2P+ $\frac{1}{2}$ 二芯2-wire	250V~ 1122106	白色 White	
	插头 Plug	16A 2P+ $\frac{1}{2}$ 二芯2-wire	250V~ 0120106	白色 White	

☐ 产品额定电流16A, 额定电压250V, 防护等级IP54;

The products' rated current is 16A, rated voltage is 250V, and protection grade is IP54;

☐ 产品通过了CB测试、VDE认证;

The products have passed CB test, and is applying for VDE certification;

☐ 其插孔部位带有保护的安全门装置, 安全可靠;

The plughole location has a protective safety door device with it, so it is safe and reliable;

☐ 接线端子有压接和插接两种接线方式可供客户选择;

The connector terminal has two wire connecting modes of pressure and socket connecting for customers to select;

☐ 插座颜色共有七种: 红、黄、绿、蓝、浅灰、深灰、黑;

Altogether there are 7 colors of sockets: blue, red, black, yellow, green, dark gray and light gray;

防护等级: IP44

IP44 Protection class

组合式配电插座箱可根据客户的需求生产

The modular power-distributing socket boxes may be produced in accordance with customers' requirements



不带保护的插座盒
Socket box without protection device
四个插座可以任意组合
Connect with four sockets freely
根据客户需求定制多插座插座盒
Produce more sockets distribution box in accordance with customer's demand



带短路和过载保护的四回路二插座配电插座箱
The four-circuit two-socket power-distributing socket boxes with short-circuit and overload protections
二个插座可以任意组合
Connect with two sockets freely
根据客户需求定制多回路多插座配电插座箱
The multi-circuit multi-socket power-distributing socket boxes may be ordered in conformity to customers' requirements



带漏电和短路与过载保护的7回路三插座配电插座箱
The seven-circuit three-socket power-distributing socket boxes with electricity leakage, short-circuit and overload protections
三个插座可以任意组合
Connect with three sockets freely
根据客户需求定制多回路多插座配电插座箱
The multi-circuit multi-socket power-distributing socket boxes may be ordered in conformity to customers' requirements



带漏电和短路与过载保护的12回路六插座配电插座箱
The twelve-circuit six-socket power-distributing socket boxes with electricity leakage, short-circuit and overload protections
六个插座可以任意组合
Connect with six sockets freely
根据客户需求定制多回路多插座配电插座箱
The multi-circuit multi-socket power-distributing socket boxes may be ordered in conformity to customers' requirements



带漏电和短路与过载保护的16回路七插座配电插座箱
The sixteen-circuit seven-socket power-distributing socket boxes with electricity leakage, short-circuit and overload protections
七个插座可以任意组合
Connect with seven sockets freely
根据客户需求定制多回路多插座配电插座箱
The multi-circuit multi-socket power-distributing socket boxes may be ordered in conformity to customers' requirements

怡达电气 国际品牌

YEEDA ELECTRIC

INTERNATIONAL BRAND



怡达电气(苏州)有限公司

地址: 江苏省苏州工业园区金浦路11号

电话: 0512-67531980 67531990

传真: 0512-62601111

邮编: 215123

YEEDA ELECTRIC (SUZHOU) CO., LTD.

ADD: NO.11 JinPu Road, SuZhou Industrial Park, JiangSu, China.

TEL: 0086-512-67531980 67531990

FAX: 0086-512-62601111

P.C: 215123

• WEB: [HTTP://WWW.YEEDA.COM.CN](http://WWW.YEEDA.COM.CN)
WWW.YEEDA-CHINA.COM

• E-mail: sales@yeeda-china.com
yeedaele@yeeda-china.com

行业最大的电子样本库

插座网本着“行业专注、用心服务”的理念为用户提供电子样本在线翻阅、在线打印、下载等专业化、个性化服务

