

行业最大的电子样本库

插座网本着“行业专注、用心服务”的理念为用户提供电子样本在线翻阅、在线打印、下载等专业化、个性化服务



Superior floor / table socket

高级地面/桌面插座

WWW.CHAZUO.COM

插座网

400-657-1110

行业专注 · 用心服务

 SHV
上海正旦电工

标准的厂房、整洁的环境、
为每一只产品的生产过程提供了可靠的品质保证……

Standard plant, clean and neat environment,
providing reliable quality guarantee for production process for each product……



办公大楼 / Office building



职工宿舍楼 / Employees dormitory



生产车间 / Production workshop



门卫室 / Guard post



公司全景 / General view of company

弹起式 Spring type floor socket 地面插座

材质及表面工艺 / Material and surface technique



铜合金 Copper alloy



不锈钢 Stainless steel



铝合金 Al alloy



锌合金(拉丝工艺)
Zinc alloy
(wire drawing technique)



锌合金(闪光银烤漆)
Zinc alloy
(flash silver baking finish)

安装功能件图例 / Graphic symbol of installing function accessories



方形弹起式DHT-120F系列 / Square spring type DHT-120F series



DHT-120F型产品特点

- 1、内装功能件模块化，可根据客户不同要求安装强电类插座或弱电类插座，可装三位二插（如装三极插座占用二位）或三位弱电插座。
- 2、使用时按拉推子，其整个插座体弹出，不用时插座体可完全收进地面以下，其盖板面与地面齐平，不影响通行和清扫。
- 3、安全可靠，打开时不拔动滑舌，插座体不会因脚踩而合上。
- 4、防渗漏设计可保证在插座体合上时水滴等流体不易渗入。
- 5、接线容易，专用接线端子，只须将外接线插入接线端子孔即可。

DHT-120F type product features:

1. The inside function accessory is modularized. It can be installed with strong or weak current series sockets according to customers' requirements. 3 gang 2 pin (2 gang if for 3 pole socket) or 3 gang weak current socket.
2. Press and pull the clipper while using, the whole socket body will bounce out, it also can go back into the ground while not using. It will not baffle to pass and clean because the cover is the same level with ground.
3. Safe and dependable. Do not pull out the slippery tongue while opening, the body will not close as the feet trample.
4. Antileak design can prevent socket body against water and other liquids infiltrating.
5. It is easy to connect, with special connecting terminal, only need to connect the outer wire into the terminal hole.

外形及安装尺寸 (Overall and installation size)

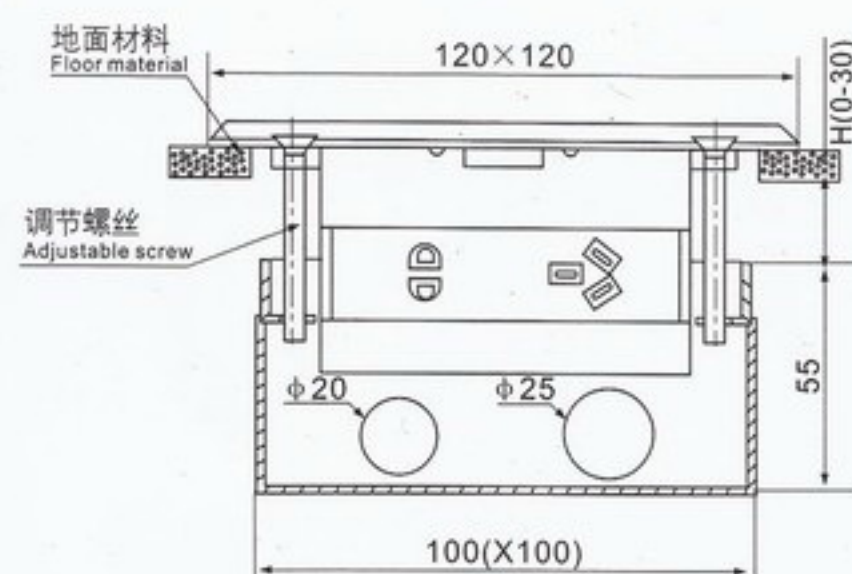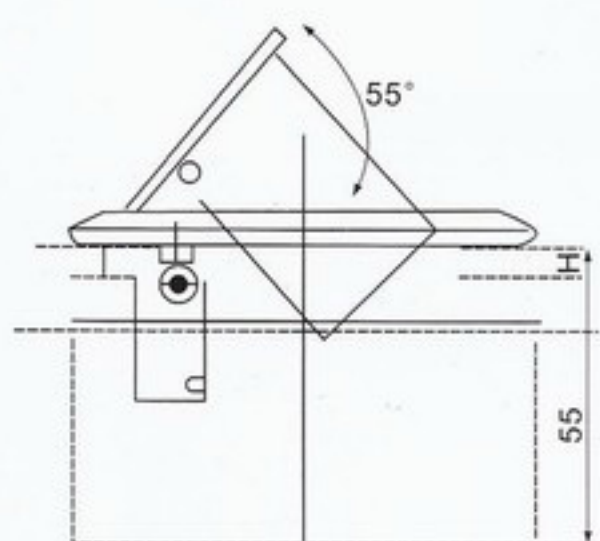



锌合金 Zinc alloy




铝合金 Al alloy



铜合金 Copper alloy

外形及安装尺寸 / Overall and installation size

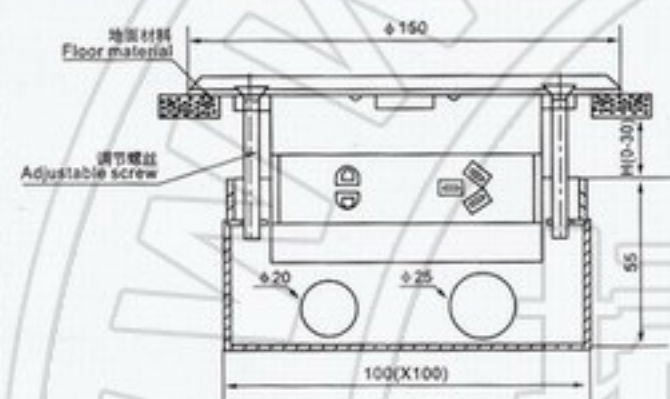


圆形弹起式DHT-120Y系列

Round spring type DHT-120Y series

产品特点 / Product features

与方形弹起式不同的在于外形，其面板为 $\phi 150\text{mm}$ ，其余功能均相同。
The shape is not the same as the square spring socket, its panel is $\phi 150\text{mm}$, other functions are the same.

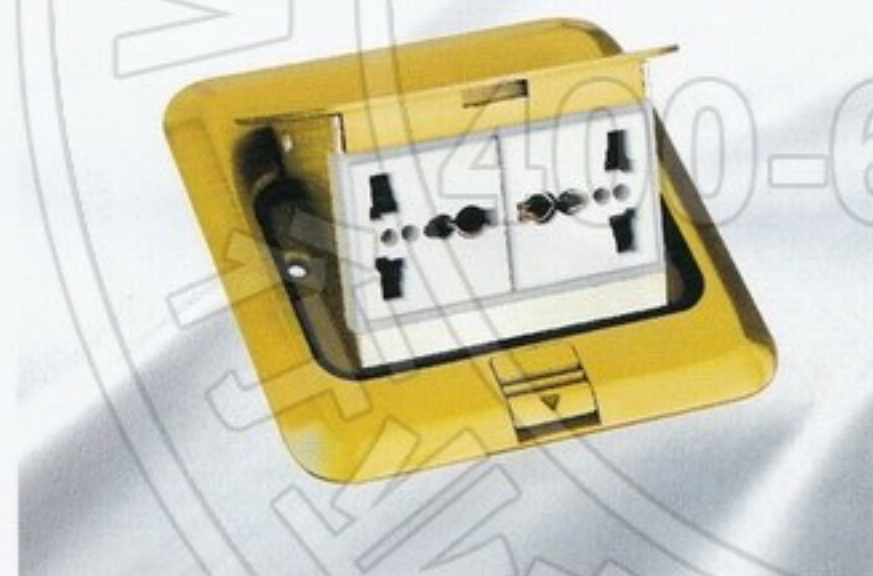


方形弹起式DHT-121F系列

Square spring type DHT-121F series

产品特点 / Product features

- 插座体选用118型功能件，可安装二位插座。
- 其中多功能强电插座使用方便，适合各种类型的二插或三插插头。
- 其它特点与DHT-120F相同。
- Socket body uses 118 type function accessories, can be installed with 2 gang socket.
- Multi-function strong current socket is convenient to use, be fitted with all sorts of two or three pin plugs.
- Other features are the same with DHT-120F.

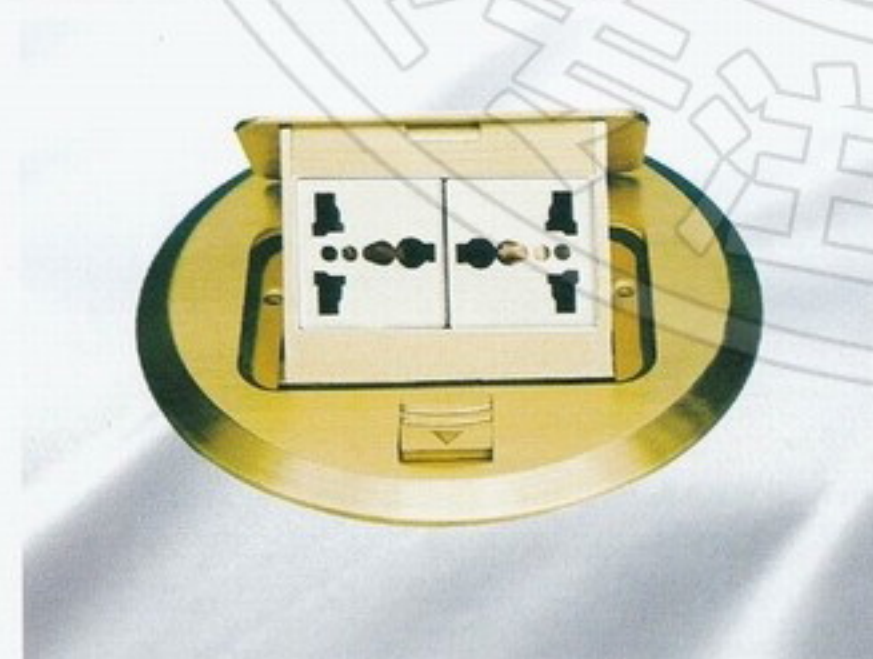

圆形弹起式DHT-121Y系列

Round spring type DHT-121Y series




弧形面板弹起式DHT-122F系列 Arc panel spring type DHT-122F series

产品特点 / Product features

- 弧形面板设计, 新颖、美观;
- 插座内部宽敞, 可满足于六类信息插座长体形插座的特殊要求;
- 开关按钮宽体扇形设计, 使开合更加灵活。
- Arc panel design, novel and beautiful;
- Wide socket inside, can meet the special requirements of six series information socket and long socket;
- Wide-body sector design for switch button, it is flexible to on and off.

外形及安装尺寸 / Overall and installation size

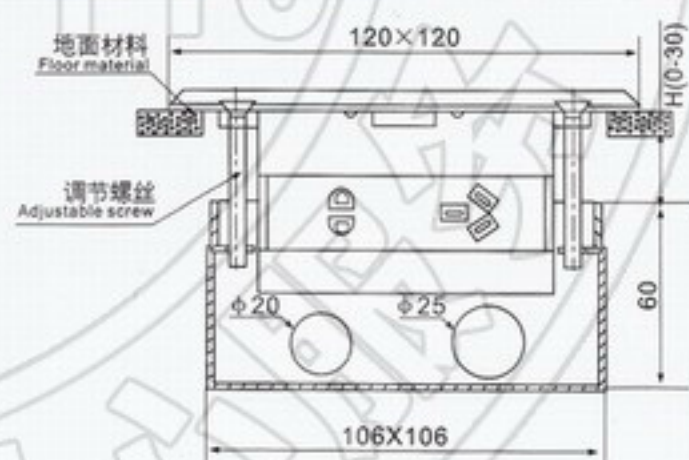





弹起式DHT-123F系列 Spring type DHT-123F series

产品特点 / Product features

- 采用高科技焊接技术，使每一细节都接近完美；
- 全不锈钢（或钛金板）铜合金材料，形成的表面平整、美观；
- 面板体采用超薄设计，更贴紧地面。
- Adopting high-tech welding technology, to make every detail approach perfect;
- Full stainless steel (or Ti-Au plate) and copper alloy materials, the formed surface is smooth and beautiful;
- Panel body adopts ultra-thin design and keep close to the ground.



外形及安装尺寸 / Overall and installation size

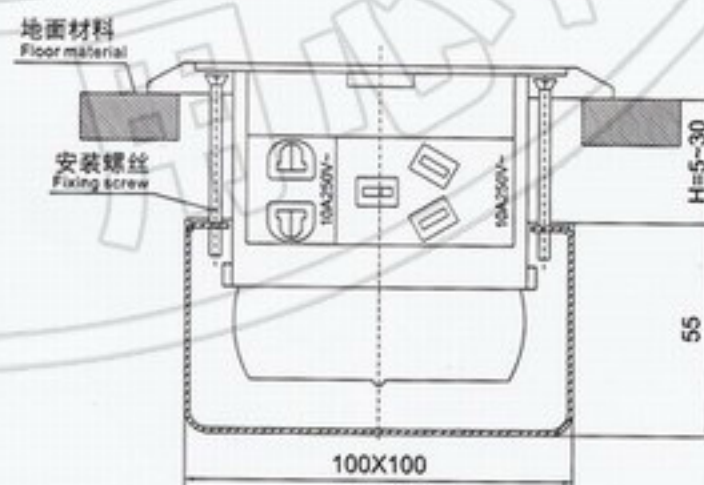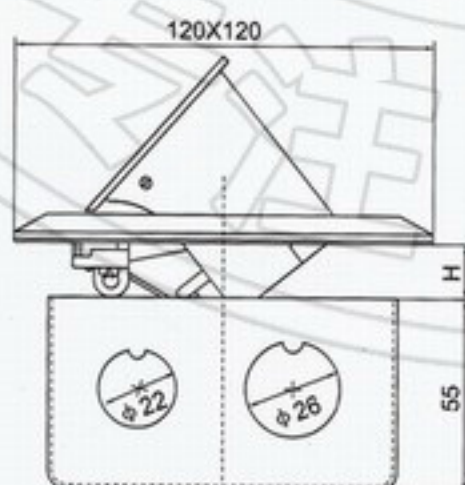

如H>30mm时用相应长度的安装螺丝
F.G. H>30mm can use longer fixing screws.




弹起式DHT-140F(宽面板)系列

Spring type DHT-140F (Wide panel) series

产品特点 / Product features

功能件与DHT-120一样，区别在于面板尺寸加宽至140X140mm,可掩盖因施工预埋底盒孔过大之用。
Function accessories are the same with that of DHT-120. The difference is that the panel dimension is widened to 140X140mm, which can conceal the oversized hole of pre-embedded bottom case caused by execution.

外形及安装尺寸 / Overall and installation size

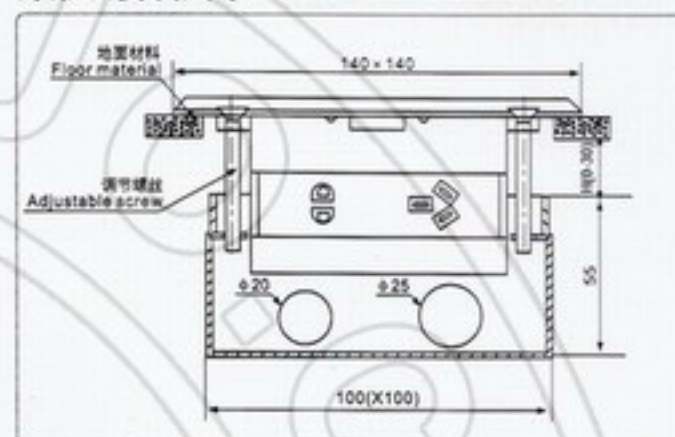


铁制底盒 Iron bottom case



铝制底盒 Bottom base AL made

外形及安装尺寸 / Overall and installation size

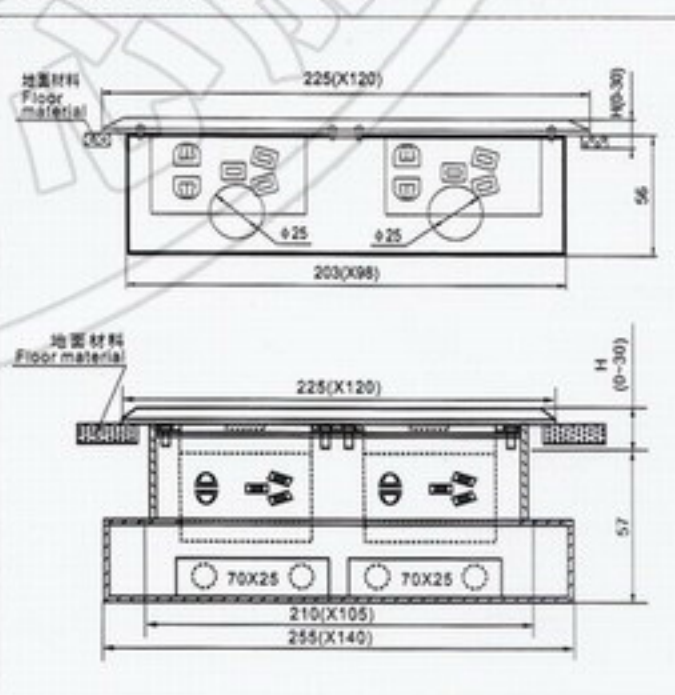

双联弹起式DST-230F系列

Double gang spring type DST-230F series

产品特点 / Product features

- 双联弹起式可根据客户要求可选装120型功能件或118型功能件，同时也可以二种功能件混装；
- 其铝制底盒永不腐蚀，可外接70X25矩形线槽或Φ25、Φ20线管，同时也可选装铁制底盒；
- 其底盒可根据客户特殊要求安装屏蔽装置，以分隔强、弱电；
- 材质有铜合金、锌合金。
- Double gang spring type can be installed with 120 or 118 type function accessories upon request, at the same time it can be installed with the two types;
- Its aluminum bottom case never be corroded, the exterior can be connected with rectangular trunking 70X25 or hasp Φ25 and Φ20, and also can be installed with iron bottom case;
- Its bottom case can be installed with shield device according to customer's requirements, to box off the strong and weak current.
- Copper alloy and Zinc alloy materials for option.



不锈钢 Stainless steel



铜合金 Copper alloy




铁制底盒 Iron bottom case

翻盖式DHF-76系列 Open cover type DHF-76 series

产品特点 / Product features

- 盖板整覆盖插座底座, 优良的防尘、防漏功能;
- 外形小巧, 可装三位功能件。
- The cover lays over the socket bottom case, with excellent dustproof and antileak function;
- Small, can be installed with 3 gang function accessories.

外形及安装尺寸 / Overall and installation size

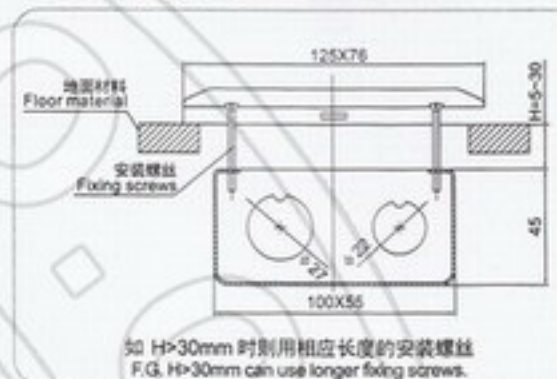

铜合金面盖 Copper alloy cover



不锈钢面盖 Stainless cover



铁制底盒 Iron bottom case

翻盖式DHF-125系列 Open cover type DHF-125 series

产品特点 / Product features

- 面板无缝设计, 覆盖严密, 杂物及灰尘不易进入;
- 多位功能件安装(可装六位120型功能件, 118型功能件可装四位);
- 底盒超薄设计, 仅48mm;
- 边侧按钮开启, 面盖按上即自动锁住。
- Seamless panel design, with air tight covering. Litter and dust will not easy to enter into;
- Multifunction accessories for installation (can install 6 gang 120 type function accessories; 118 type function accessories can be installed with 4 gang);
- Ultra-thin bottom base design is only 48mm;
- Side button for opening. It will lock automatically while cover is pressed.

外形及安装尺寸 / Overall and installation size



专利


翻盖式DHF-155系列 Open cover type DHF-155 series

产品特点 / Product features

- 扇形面盖设计独特;
- 双按钮同时按时才可开启, 防止意外触碰一只按钮即弹开面盖的缺陷, 性能安全。
- With unique sector face cover design;
- Opening just can be performed by pressing the two buttons at the same time. To avoid the defect that only one button pressed will spring up the face cover. With safe performance.





外形及安装尺寸 / Overall and installation size

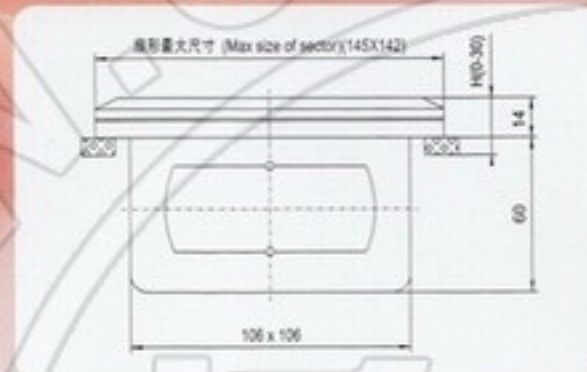


铜合金 Copper alloy



不锈钢 Stainless steel

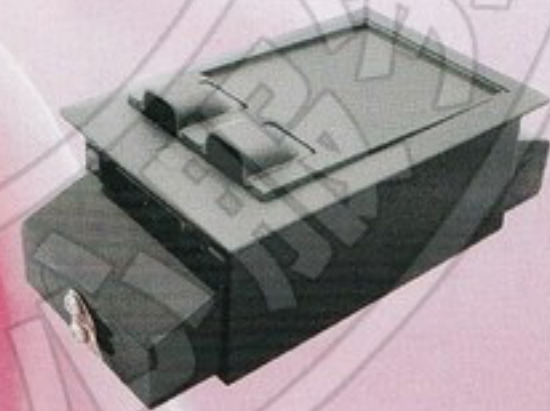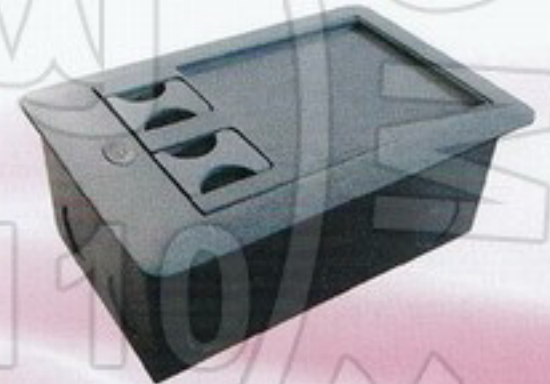

外形及安装尺寸 / Overall and installation size

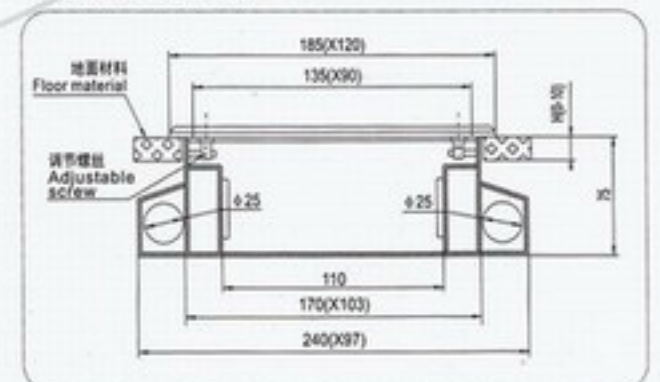

翻盖式DHF-185系列 Open cover type DHF-185 series

产品特点 / Product features

- 铝合金材质表面, 喷沙工艺素雅大方;
- 底盒有两种可供选择;
- 出线口带保护功能;
- 功能件分装底盒两侧, 120型可装六位, 118型可装4位。
- The surface of Al alloy material, with sandblast technique, simple but elegant;
- Two bottom cases for option;
- Line out port with protection function;
- Function accessories are installed to both sides of bottom case. 6 gang for 120 type function accessories and 4 gang For 118 type.

开启式 Open type floor socket

地面插座



卓越源自Excellence root in profession

行业专注·用心服务

电子样本

<http://www.chazuow.com>




开启式DHK-110Y系列 Open type DHK-110Y series

产品特点 / Product features

- 设计小巧而美观实用;
- 插座面盖与面板连体结构, 使打开和关闭非常方便。
- The design is delicate and not only practical but also beautiful;
- The combined construction is connected by the cover and panel of socket, it is very convenient to open and shut.

外形及安装尺寸 / Overall and installation size

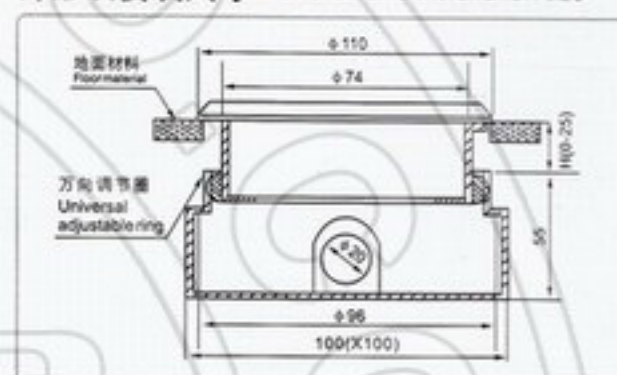


开启式DHK-130Y系列 Open type DHK-130Y series

产品特点 / Product features

- 使用方便, 款式新颖, 可随客户要求安装各种功能件;
- 带水平微调装置及高度调节圈, 可使插座体在任何地面安装平整、美观。
- It is convenient to use, the style is novel, can be installed all sorts of function accessories according to customer's Requirements;
- With level tiny adjusting device and high adjusting grommet, can make the body install in any level and neat ground.

外形及安装尺寸 / Overall and installation size

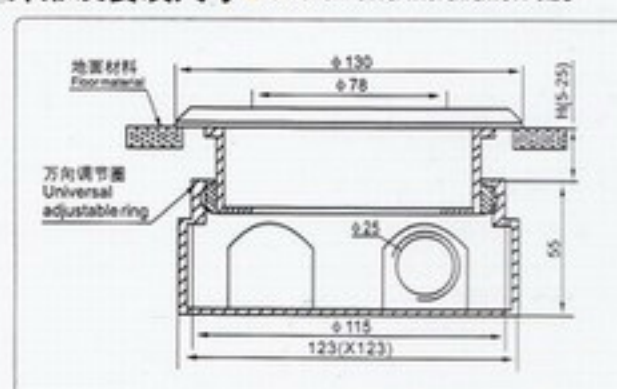



DHK-127F
四位安普数据插座 / 4gang AMP data socket




DHK-127F
二位多功能插座 / 2gang multifunction socket

开启式DHK-127F系列 Open type DHK-127F series

产品特点 / Product features

- 内可装120型(可装三位)或118型(可装二位)功能件;
- 其铝制底盒永不腐蚀;
- 内置四个调节铜柱可调节面板高度;
- 材质: 铜合金、锌合金、不锈钢;
- 120 type (3 gang can be installed) or 118 type (2 gang can be installed) function accessories can be installed inside;
- The aluminum bottom case will never corrode;
- The interior 4 adjustable copper posts are used for adjusting the panel height;
- Materials: copper alloy, Zinc alloy and stainless steel.

外形及安装尺寸 / Overall and installation size

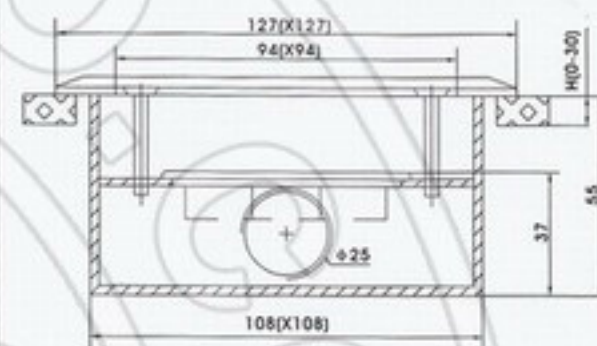

DHK-127BF,
三位电话插座
3gang telephone socket
一位麦克风
1gang microphone socket
视频、音频插座
AV socket




DHK-127BF,
二位二极插座
2gang 2pole socket
二位多功能插座
2gang multifunction socket

开启式DHK-127BF系列 Open type DHK-127BF series

产品特点 / Product features

- 功能件安装板采用上置式, 内可安装六位120型功能件, 功能强大。
- Installation panel of function accessories adopts up placed type. 6 gang 120 type function accessories can be installed inside, with strong functions.

外形及安装尺寸 / Overall and installation size

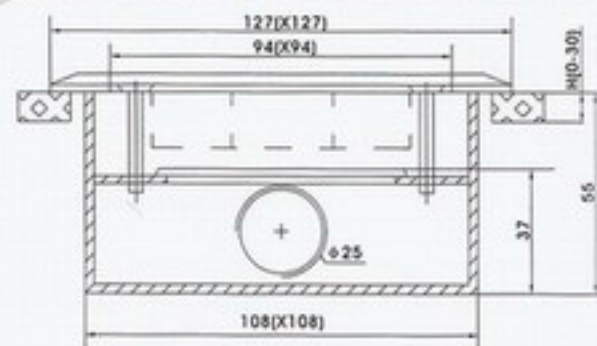



厂区前花园 / Garden in front of plant



Brief introduction

企业简介

浙江精艺建筑电器有限公司成立于1987年，位于浙江省乐清市中心工业园区二号支路，与国家级风景名胜区雁荡山毗邻，104国道近在咫尺，交通便利。公司厂区占地30余亩，建筑面积10000平方米，是专业从事高级地面插座系列产品研制开发和制造的现代化企业。公司实现从产品开发、制模、加工、组装一条龙生产，设备先进，技术力量雄厚，拥有22名专业技术员，员工二百多名。现已生产弹起式、开启式、螺旋式三大系列三十多种型号地面插座及桌面插座。

公司产品性能稳定可靠，设计时尚高档，表面材质有铜合金、锌合金、铝合金、不锈钢等，内可装配电源、电话、电脑信息等插座。产品广泛适用于各种大厦、银行、邮电、写字楼、学校电教室、计算机房等框架式建筑地面布线系统接线、出线装置（终端）。

本公司生产的地面插座系列产品不仅外表美观，使用方便，用料考究，而且检测严格，产品质量上乘。1999年经国家家电测试所检测，产品品质完全符合GB2099.1-96、GB1002-96标准，是首批取得CCC认证的厂家，并通过ISO9001质量体系认证，CE质量体系认证等，并荣获工程建设推荐产品证书，成为中国建筑装饰协会会员单位。

公司以“卓越品质，诚信立业”赢得了广大客户的高度赞誉与一致好评，与我们OEM合作的国内各大厂家更是非常信任。重合同、守信用工作准则使我们赢得越来越多的客户。现我公司在全国各大城市均已设有代理点，产品正逐步打入国际市场。随着需求不断扩大，公司积极吸取国内外先进技术和管理经验，加大对技术革新、产品研制、软硬件设施的投入，为扩大企业规模奠定了基础。

我公司坚持以“质量取胜市场，信誉赢得用户”的宗旨，与新老用户精诚合作，与时俱进，携手共创美好未来！

Our company was founded in 1987, locating to Number 2 By-pass Road, Center Industrial District, Yueqing, Zhejiang and abut upon Yandang Mountain, the famous scenic spot of national grade. It is close to 104 national highway and the traffic is convenient. The factory area covers more than 30 acre, building area 10,000 square meters. It is a professional manufacturer to be engaged in the high grade floor socket series, realizing a continuous line from development, manufacture, process and assembly. It has advanced equipments, strong technique, owning 22 professional technician and more than 200 employees. Now it has produced spring type, open type, screw type three series and 30 various model floor sockets.

The products are reliable and stable in performance. Material contains copper alloy, zinc alloy, stainless steel etc., it can be equipped with power supply, telephone, computer information etc floor socket inside. The products are extensively applicable to the connection and line-out devices (terminal) for all kinds of mansion, bank, post telephone and telegraph, office building, school electricity classroom and compute building etc, frame type building floor wiring system. The floor socket series that our company produced is not only the outward appearance is beautiful, easy to use, fashionable material, but also the examination is strict, the quality is best. Was tested by national appliance inspection institute in 1999, match the standard GB2099.1-96, GB1002-96 completely. It is also the first manufacturer to acquire CCC certificates, and have passed the ISO9001 and CE quality system certification. Becoming a member of China building decorates association, having the honor of acquiring engineering development recommended product certificate.

Our company has been emphasized quality and trustworthiness on business rules to win good opinion from large customers for many years. Each OEM domestic manufacturer cooperating with us gave more confidence to us. The working principle of emphasizing contract, keeping promise makes us win more and more customers. The company has established agencies in the whole country and the products had entered into domestic market and continuously extend along with the need. The company actively absorbs advanced technology and management experience at home and abroad to increase the input for technology reformation, product research and software and hardware establishments, which settles the base for enlarging the enterprise.

Our company insists on the aim of "To occupy market by quality, to win customers by credit" to cooperate with new and old customers sincerely, advancing with times and to create the bright future together!



四位多功能插座 / 4gang multifunction socket



86型连面板 / 86 type with panel




一位三极四线插座(25A) / 1gang 3pole 4line socket (25A)

开启式DHK-145F系列 Open type DHK-145F series

产品特点 / Product features

- 功能强大，可根据客户不同要求安装四位118型功能件或六位120型功能件或者86型功能件（连面板）；
- 用时拿住面盖上的提子，掀起盖板，插入插头后盖上盖板，使线缆从提子孔中穿出；
- 材质：铜合金、锌合金、不锈钢。
- The function is strong, can be installed with 4 gang 118 type or 6 gang 120 type or 86 type function accessories according to customer's requirements (with panel).
- Hold the handle on the cover when using, pick up cover to insert the plug and close the cover, make cable thread out the hole.
- Materials: copper alloy, Zinc alloy and stainless steel.

外形及安装尺寸 / Overall and installation size

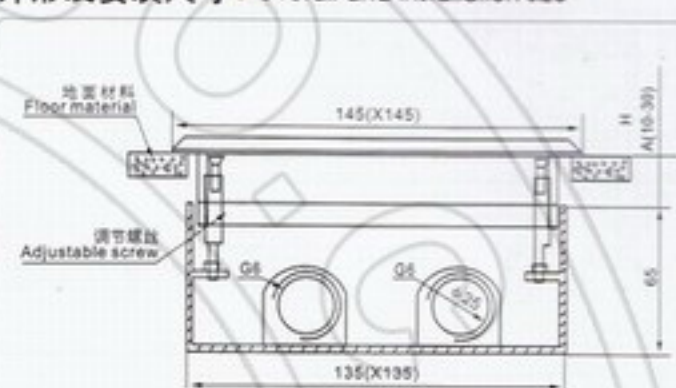

DHK-180F,
一位二位插座
1gang 2pole socket
二位多功能插座
2gang multifunction socket
六位弱电功能件
6gang weak current function accessories




DHK-180F,
六位多功能插座
6gang multifunction socket

开启式DHK-180F系列 Open type DHK-180F series

产品特点 / Product features

- 插座体内空间大，可满足客户大容量的要求，内可装十位120型插座或六位118型插座；
- 其底盒为铝制；
- 材质：铜合金、锌合金、不锈钢。
- The space is big inside the body, can meet the large capacity requests for customers, 10 gang 120 type socket or 6 gang 118 type socket can be installed inside;
- The bottom case is aluminum made;
- Materials: copper alloy, Zinc alloy and stainless steel.

外形及安装尺寸 / Overall and installation size

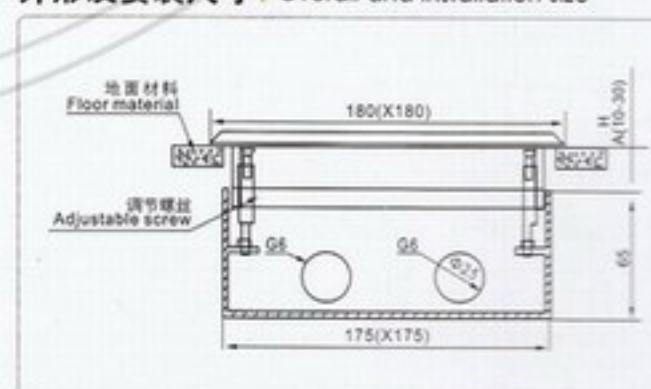




开启式DHK-270F系列

Open type DHK-270F series

产品特点 / Product features

- 双联开启式可选装12位120型功能件也可选装二联86型（连面板）或八位118型功能件；
- 可按客户需求强、弱电分二室安装；
- 底盒为铁制底盒；
- 材质：铜合金、不锈钢。
- Double gang open type can be installed with 12 gang 120 type function accessories or 2 gang 86 type (with panel) or 8 gang 118 type;
- Divide two space of strong and weak current to install upon request;
- The bottom case is iron made;
- Materials: copper alloy and stainless steel.

外形及安装尺寸 / Overall and installation size

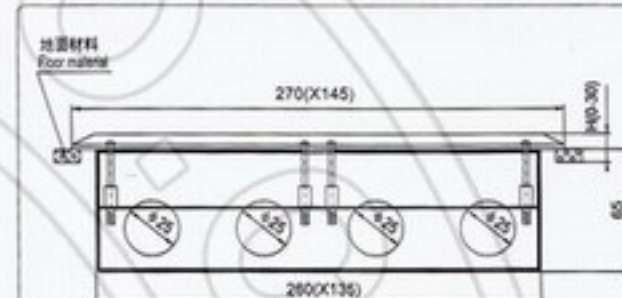

DHK-320F-118

10gang multifunction socket
10gang 118 type data socket



DHK-320F-86

3gang 86 type (socket with panel)


开启式DHK-320F系列

Open type DHK-320F series

产品特点 / Product features

- 地插座功能齐全，内可装三联86型（连面板）或可装十位118型功能件，也可选装17位120型功能件（其中三插占二位）
- 锌铝合金底盒 美观实用，可根据客户要求安装屏蔽装置，分隔强、弱电，其导入接线管可根据工程需求选取装 $\Phi 20$ 或 $\Phi 25$ 线管，也可选装70X25(mm)矩形线槽。
- The function of floor socket is well-found, the inside can be installed with 3gang 86 type (with panel) or 10 gang 118 type function accessories, 17 gang 120 type also can be chosen. (In which 2 gang for 3 pin)
- Bottom case is aluminum made, which can be installed with shield device according to customer's requirements, to box off the strong and weak current. Its inlet wiring tube can be chosen with wiring cable $\Phi 20$ or $\Phi 25$ by project, and rectangular dust 70X25(mm) too.

外形及安装尺寸 / Overall and installation size

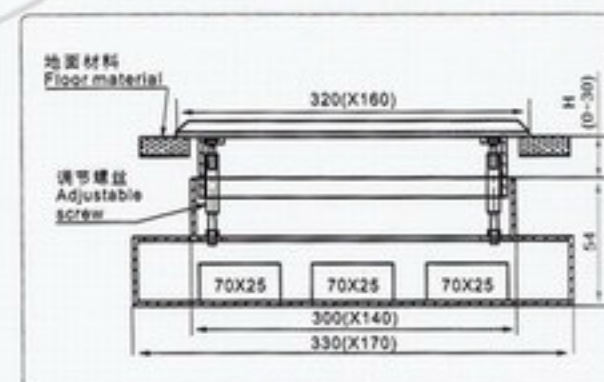



DSK-245F-86

二联86型(连面板)
2gang 86 type (with panel)
功能件
Function accessories

DSK-245F-120

二、三极强电插座
2 & 3 pin strong current socket
各种弱电功能件
All sorts of weak current function accessories



双联开启式DSK-245F系列

Double gang open type DSK-245F series

产品特点 / Product features

- 双联开启式可选装12位120型功能件也可选装二联86型(连面板)。
- 可按客户需求强、弱电分二室安装。
- 底盒外接可选接70X25 (mm)矩形线槽, 也可接Φ20或利用变径接头接Φ25 (mm) 线管。
- Double gang open type can be chosen with both 12 gang 120 type function accessories and 2 gang 86 type (with panel).
- The sockets can be divided into two room for the strong and weak current upon customer's requests.
- The bottom case can be chosen to install with rectangular dust 70X25(mm), also install Φ20 or reducer union dust Φ25(mm).

外形及安装尺寸 / Overall and installation size

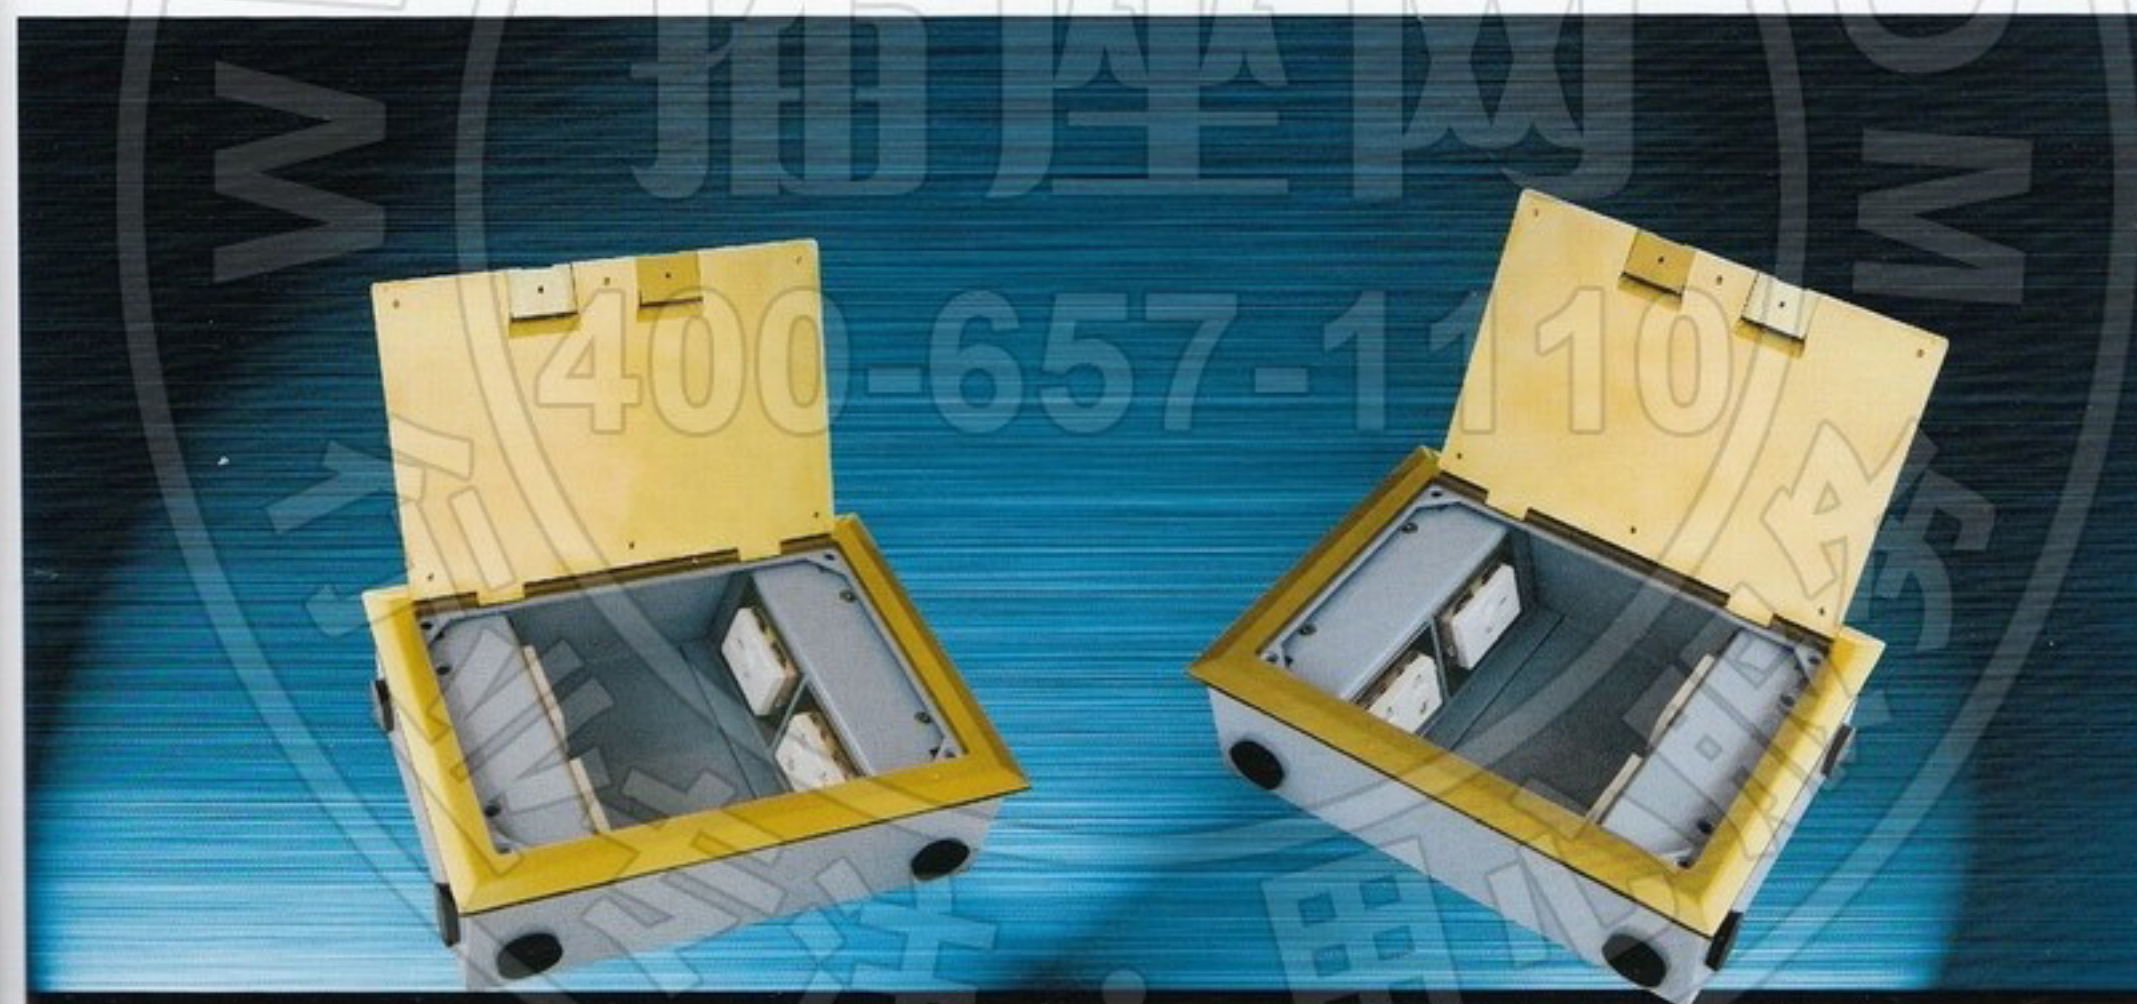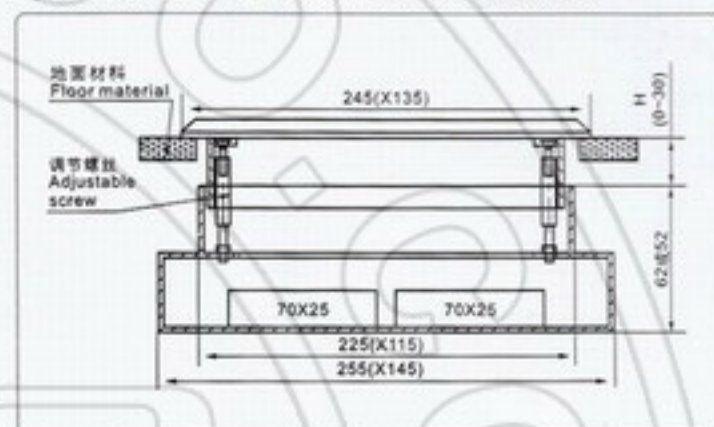


侧插开启式DCK-250F系列

Side insert open type DCK-250F series

产品特点 / Product features

- 插座体分布于盒体内部两侧, 强、弱电功能件可分装两边, 起到最佳的屏蔽效果。
- 可选装8位120型不同功能件插座或四位118型功能件。
- The body is distributed in inner both sides, the strong and weak current function accessories can be installed to both sides, get a better shield result.
- Can choose 8 gang 120 type different function accessories socket or 4 gang 118 type function accessories.

外形及安装尺寸 / Overall and installation size

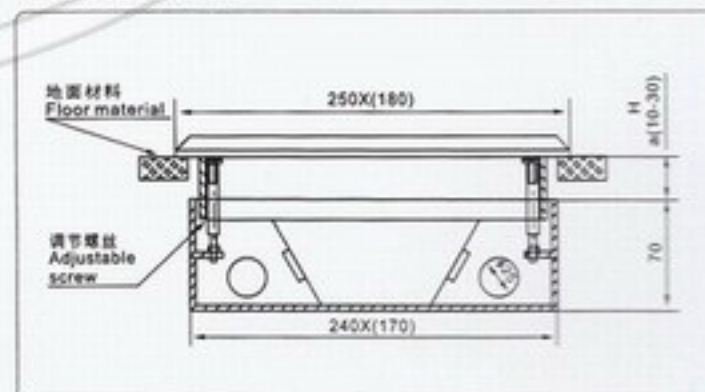

螺旋式 Screw type floor socket

地面插座



【卓越源自Excellence root in profession 专业】



DHL-110Y₂
二位二极插座 / 2gang 2pole socket



DHL-110Y₁
一位多功能插座(118型)
1gang multifunction socket (118 type)



DHL-110Y₃
一位多功能插座(120型)
1gang multifunction socket (120 type)


螺旋式DHL-110Y系列

Screw type DHL-110Y series

产品特点 / Product features

- 可选装120型功能件(二位)或118型功能件(一位)体积小、美观;
- 具有优良的防水功能, 适合安装于大厅、过道等不常用但防水要求高的地面;
- 材质: 铜合金、锌合金;
- Can choose 120 type function accessories (2 gang) or 118 type (1 gang), small and beautiful;
- With excellent waterproof function. Applicable to hall and aisle ground that not used usually but with high waterproof Request;
- Materials: copper alloy and Zinc alloy.

外形及安装尺寸 / Overall and installation size

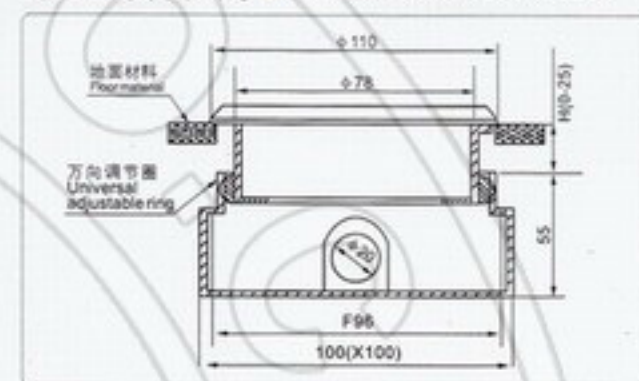

DHL-130Y₁
一位多功能插座 / 1gang multifunction socket



DHL-130Y₂
二位多功能插座 / 2gang multifunction socket



DHL-130Y₄
四位安普数据插板 / 4gang AMP data flushboard


螺旋式DHL-130Y系列

Screw type DHL-130Y series

产品特点 / Product features

- 其表面为 $\Phi 130$ mm, 内可选装二位118型功能件或三位120型功能件, 另有可装四位电话或电脑数据面板供客户选择;
- 材质: 铜合金、锌合金;
- Its surface is $\Phi 130$ mm, the inside can be installed with 2 gang 118 type or 3 gang 120 type function accessories, additionally 4 gang telephone or computer data panel for option;
- Materials: copper alloy and Zinc alloy.

外形及安装尺寸 / Overall and installation size

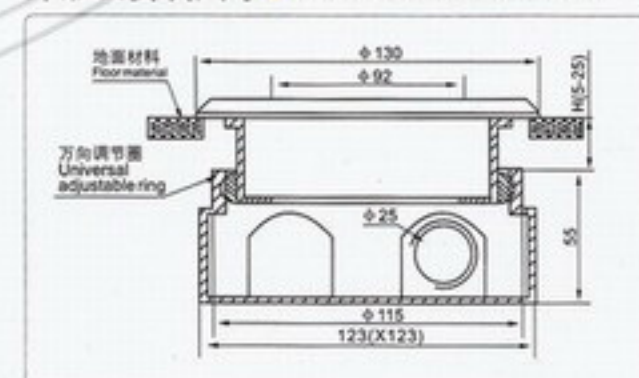



螺旋式DHLB-130Y系列 Screw type DHLB-130Y series

产品特点 / Product features

- 铜面盖分为大、小两个螺旋盖;
- 线缆可从小螺旋孔中穿出, 可防尘沙进入插座内;
- 小螺旋孔亦可作为转接口之用。
- The copper cover is divided into big and small spiral covers;
- The wire cable can thread out the small one, can prevent the sand and dust entering into the socket;
- The small screw hole is used for switching port.


外形及安装尺寸 / Overall and installation size




DHLB-130Y
二位多功能插座 / 2gang multifunction socket



DHLB-130Y
三位电话插座 / 3gang telephone socket

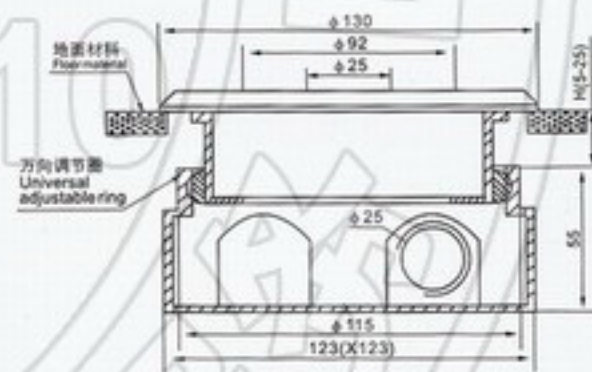

DHLB-130Y
四位安普数据插板 / 4gang AMP data flashboard

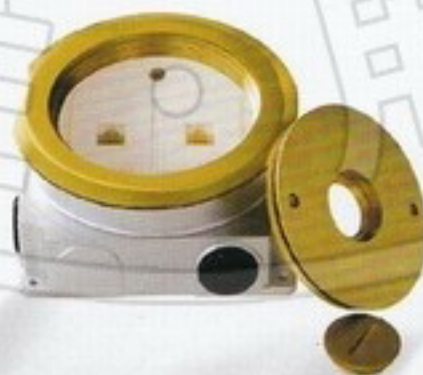

DHLB-130Y
二位电话插座 / 2gang telephone socket



DHLB-130Y
一位多功能插座 / 1gang multifunction socket

桌面 Table socket

插座





桌面插座DZX-205系列

Table socket DZX-205 series

产品特点 / Product features

- 此款适用于桌面插座，亦可作地面插座使用；
- 使用时将面盖掀起，放入一侧滑槽中，不用时将面盖拉出盖住插座体；
- 120型功能件可装四位，118型功能件可装三位；
- 表面铝合金材质，工艺为喷塑。

- This type is applicable to table socket, also can be used as floor socket;
- Raising the face cover when using, put into the sliding chute of one side. Pull out of the face cover and cover the socket body when not using;
- 120 type function accessories can be installed with 4 gang, 118 type can be installed with 3 gang;
- Al alloy surface, the technique is spray moulding.


外形及安装尺寸 / Overall and installation size




安装宽板120型功能件样式
Installation mode for wide panel 120 type function accessories



安装120型功能件样式
Installation mode for 120 type function accessories

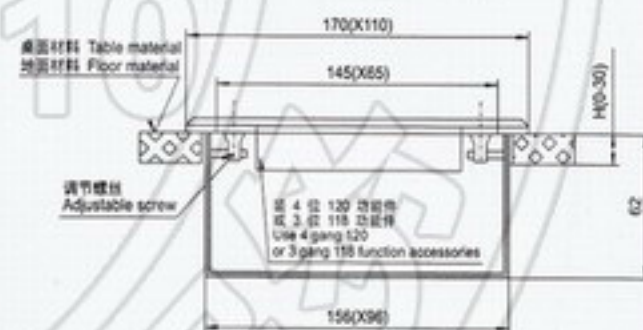

墨绿喷塑面
Greenish black spray moulding surface

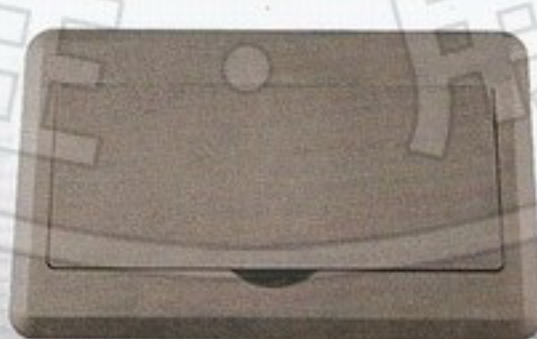

黑色喷塑面
Black spray moulding surface




铁制底盒
Iron made bottom case

桌面插座DZA-210系列 Table socket DZA-210 series

产品特点 / Product features

- 适用于办公桌、会议桌上强电及弱电插座;
- 按钮式开启设计, 轻轻一按插座体即缓缓打开, 不用时合上插座体即自行闭锁;
- 材质为铝合金。
- Applicable to the light or strong current socket on office desk, council board;
- Button open design. Slightly press the socket body and it will open slowly. Fully cover the socket body when not using, it will lock automatically;
- Al alloy made.

外形及安装尺寸 / Overall and installation size

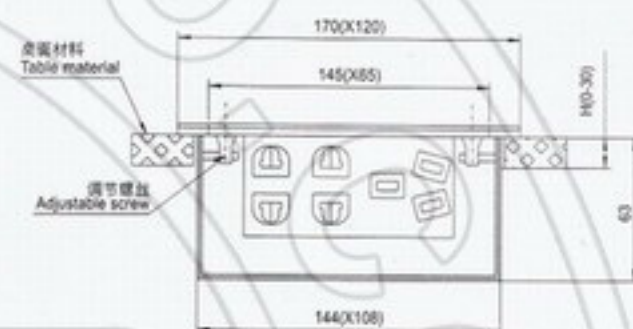

暗绿喷漆面
Dark green spray moulding surface




黑色喷漆面
Black spray moulding surface



底盒
Bottom case



黑色喷漆面
Black spray moulding surface

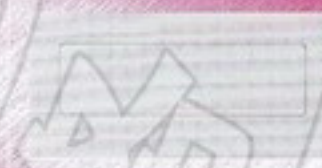


暗灰面
Dark gray surface



110X220X98mm

外形及安装尺寸 / Overall and installation size

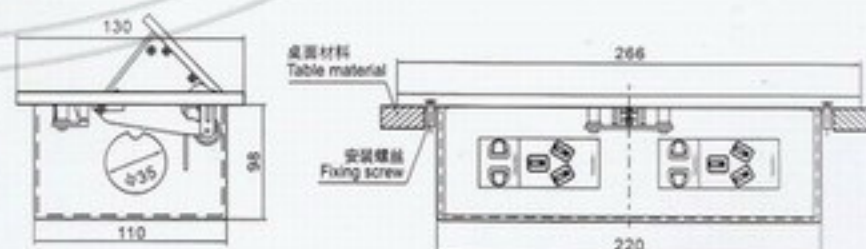

桌面插座DZA-266系列 Table socket DZA-266 series

产品特点 / Product features

- 高档办公桌、会议桌配用的最佳配置 (多媒体功能连接件设置);
- 扣位部位采用独特的自锁式方式设计, 弹起部位采用阻力设计, 打开时呈缓慢打开状态。
- The optimal devices for high grade office desk, council board (functional connector devices for media);
- Buckle part adopts unique self-locking mode, spring up part adopts resistance design and will be on slow opening state when opened.

架空式 Aerial type floor socket

地面插座



卓越源自Excellence root in profession



办公楼大厅 / Office hall

400-657-1110

Enterprise's resource

企业资源



董事长室 / President office



产品展示厅 / Displaying hall



办公区 / Office zone



会议室 / Meeting room



市场部 / Marketing dept

塑料
Plastic material




系列DJC-250-A系列 Aerial type DJC-250-A series

特点 / Product features


→ 地面插座适用于计算机房等架空地面(活动网络地板);
→ 地面插座也可作常用地面插座使用(需卸下固定铁板);
→ 2款, 功能件平装型和侧装型;
→ 可装86型功能件连面板;
→ 具有防夹线缆功能。

→ Aerial floor socket is applied to the aerial ground for computer room etc. (movable network floor);
→ Aerial floor socket also can be used as common floor socket (need to dismantle the fixed iron plate);
→ 2 types for bottom case. Horizontal install and side install type for function accessories;
→ Can installed with 4 gang 86 type function accessories with panel;
→ Line out port with wire and cable clipping resistant function.

外形及安装尺寸 / Overall and installation size

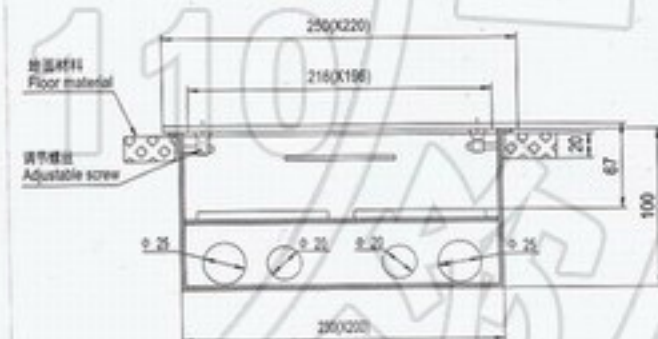

Bottom case installation modes:
a. First dismantle the fixed iron plate;
b. Put the bottom case into the floor hole;
c. Insert the fixed iron plate into the original place;
d. Fasten the screws on fixed iron plate to make the bottom case keep close to floor.

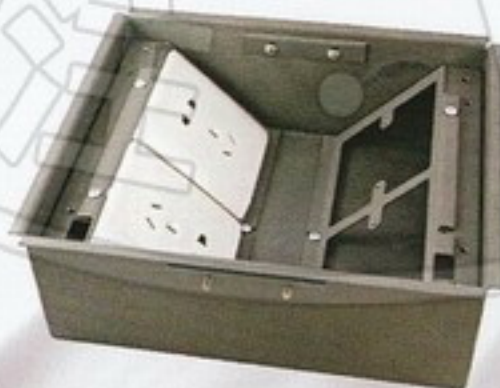

功能件侧装式 Side installation type for function accessories

功能件平装式 Horizontal installation type for function accessories

地面材料(如地毯、防静电地板)厚度9mm
Ground materials (ex: Carpet, static resistant floor) with 9mm



架空式DJC-250-B系列


Aerial type DJC-250-B series

产品特点 / Product features

- 采用不锈钢或铜板材制成表面、美观、牢固;
- 底盒深度可根据客户要求定制;
- 功能件安装方式可选平装或侧装;
- 出线口有保护线缆功能;
- 面盖中间凹度8~9mm, 可嵌入地面材料。

- Surface is stainless or copper plate made. Beautiful and firm;
- Depth of bottom case can be customized upon request;
- Horizontal installation or side installation of function accessories installation modes for option;
- Line out port has wire and cable protection function;
- Concavity in the middle of face cover is 8~9mm, floor material can be set into.

外形及安装尺寸 / Overall and installation size

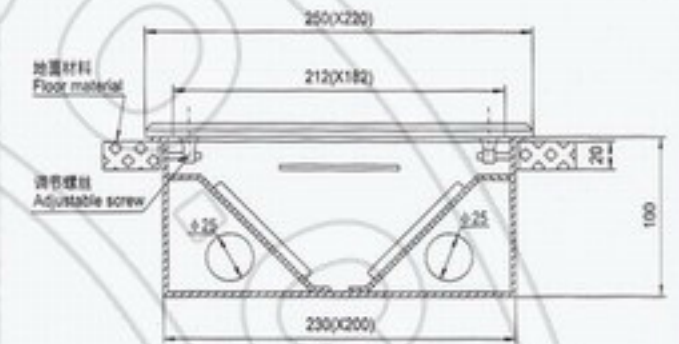


架空式DJC-250-C系列

Aerial type DJC-250-C series

产品特点 / Product features


C型与B型尺寸功能件一样, 其不同处在于C型面盖为整体金属板材制成。
Dimension and function accessories of C type is the same with that of B type,
The difference is that the face cover of C type is made of metal plate.

外形及安装尺寸 / Overall and installation size

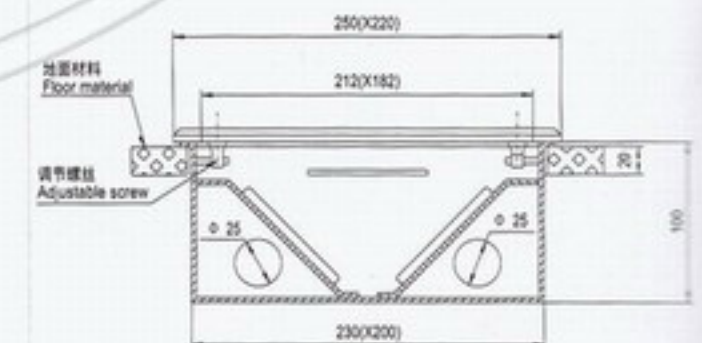



外形及安装尺寸 / Overall and installation size

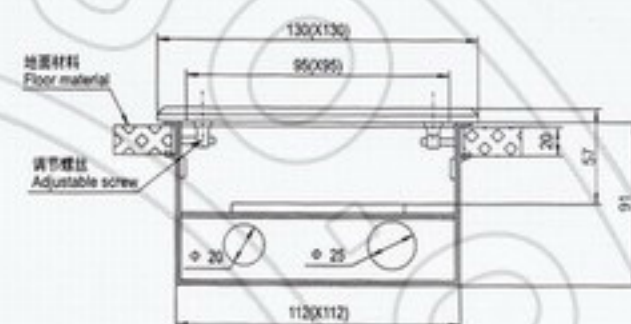

架空式DJC-130系列

Aerial type DJC-130 series

产品特点 / Product features

- 可装两位118型或三位120型功能件;
- 底盒加深设计, 当插头插入时面盖可完全盖上, 同时可根据客户需求定制底盒高度。
- Can installed with 2 gang 118 type or 3 gang 120 type function accessories;
- Deepened bottom case design. The face cover will completely closed when the plug is inserted into and also can be customized upon request.




带锁扣功能 With lock function

出线口活动块样式
Mode of movable block of line out port

使用时出线口活动块样式, 不使用
时可将活动块反装使与面盖相平
Mode of using movable block of line out port,
inversely install it to make the face cover be
in line when not using.

外形及安装尺寸 / Overall and installation size

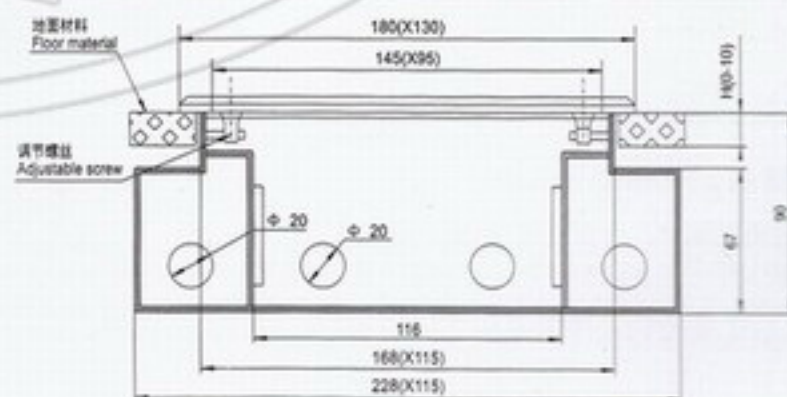

架空式DJC-160系列

Aerial type DJC-160 series

产品特点 / Product features

- 插座体分布于底盒两侧安装, 可使弱电区分开;
- 带锁扣装置可使面盖不被轻易打开;
- 出线口带保护功能防止线缆因不小心踩断。
- Socket body is installed to both side of bottom case to divide the light current and strong current zone;
- Face cover will be not easy to open while with lock device;
- Protection function of line out port will avoid the careless trample by wire and cable.




架空式DJC-165系列

Aerial type DJC-165 series

产品特点 / Product features

- 可装两位118型功能件，分布于底盒两侧，一位为平装，一位为侧装方式；
- 新颖小巧，满足客户特殊要求。
- Can be installed with 118 type function accessories for both sides of bottom case. One gang is horizontal installation and the other gang is side installation;
- Novel and small, to meet customers' special requirements.

外形及安装尺寸 / Overall and installation size

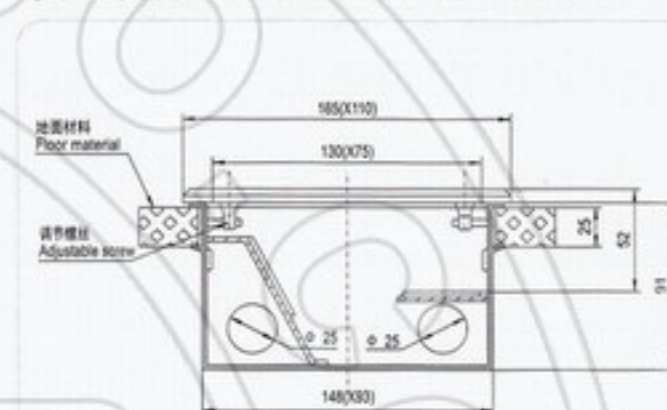


架空式DJC-180系列


Aerial type DJC-180 series

产品特点 / Product features

- 底盒扁宽设计，使插座体内部空间宽敞；
- 插座体分布底盒两侧，120型可装六位，118型可装四位。
- Flat wide design for bottom case makes wide inside space for socket body;
- Socket body is set to both sides of bottom case. 6 gang for 120 type and 4 gang for 118 type.

外形及安装尺寸 / Overall and installation size

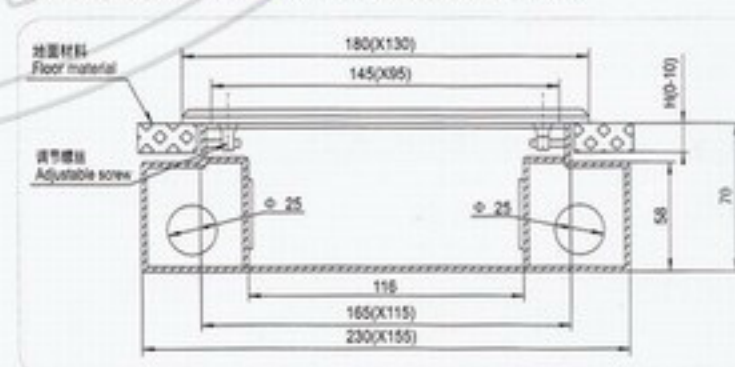


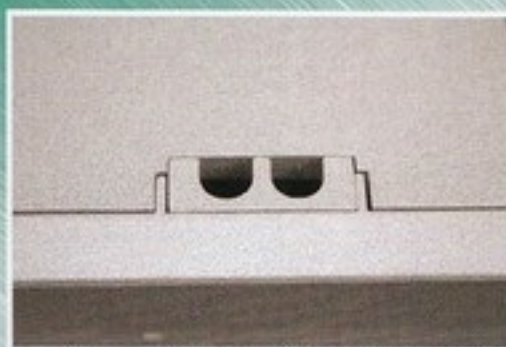

出线口活动块有两个出线孔
Two line out holes for line out port movable block



铁制底盒 Iron-made bottom case

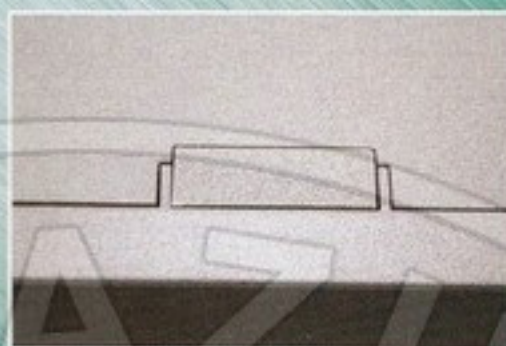

地插不用时出线口活动块反装可防沙尘等进入插座体内
Inversely install the movable block when the floor socket is not used can prevent sand entering into the socket body.



盖板合上时样式
Mode for closing the cover plate


架空式DJC-225系列 Aerial type DJC-225 series

产品特点 / Product features

- 双联开启设计，方便强弱电分开安装；
- 适用安装2位86型插座(连面板)；
- 加深底盒可使插头插入后面板完全盖上；
- 材质为铝合金。

- Double gang open design is convenient for light and strong current to install separately;
- Applicable to install with 2 gang 86 type socket (with panel);
- Deepened the bottom case can make the face cover completely covered after plug inserted;
- Al alloy made;

外形及安装尺寸 / Overall and installation size

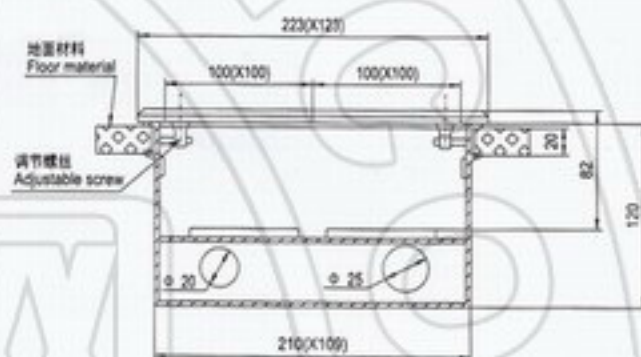

型号 Type: DEC-128
规格: 一位三插多功能插座
Spec.: 1 gang 3Pin multifunction socket

型号 Type: DEC-128
规格: 一位二插, 一位电脑插座
Spec.: 1 gang 2Pin, 1 gang computer socket

隐藏式DEC-128系列 Hidden type DEC-128 series


本产品采用耐磨增强塑料，外表小巧美观，沙纹表面，经久耐用。仅可配装大板松下120型功能件(二位二插或一位三插)，面板和底盒连接处可旋转20°，使用方便。

The product adopts wear resistant reinforced plastic, with delicate and beautiful appearance and ripple surface, wear well. It is only equipped with Osaka Panasonic 120 Type function accessories (2gang 2pin or 1gang 3pin). The joining of panel and bottom case can be turned 20 degrees. It is easy to operate.

平板式地插DHB-86系列 Flat type floor socket DHB-86 series



铜质表面 Copper surface

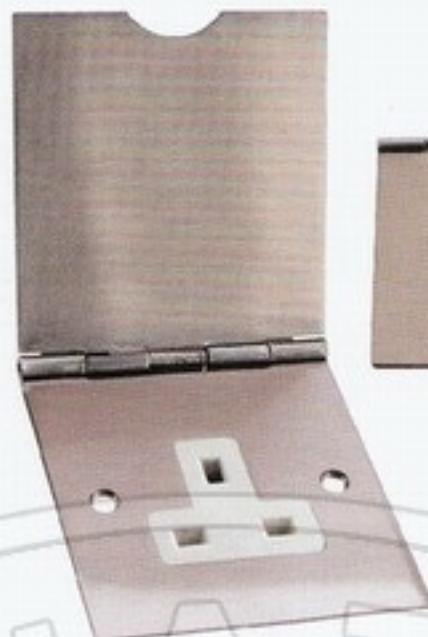


不锈钢材质面 Stainless surface

产品特点 / Product features

- 此款适合安装于地面也可装于墙面等地方;
- 适合安装一位英式电源插座。
- This type is applicable to be installed to ground and also to the wall etc;
- Applicable to be installed with 1 gang BS power socket.

外形及安装尺寸 / Overall and installation size

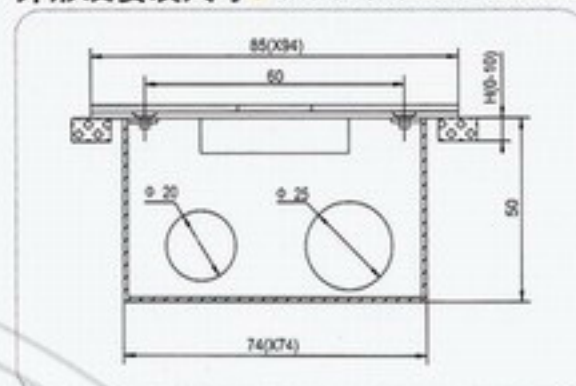

86型金属面板(不锈钢) 86 type metal panel (stainless steel)



一位卡浓插座
1 gang Kalon socket



双卡浓插座(孔式)
Double Kalon socket (hole type)



双卡浓插座 双位6.34插座
Double Kalon socket Double gang 6.34 socket

可根据用户不同要求定制 / Can be customized upon requests

功能件 Function accessories

120型宽板功能件 / 120 Type function accessories



D1 二极双用插座
2pole double-use socket



D2 二极带接地插座10A
2pole socket with earth 10A



D3 二极带接地插座16A
2pole socket with earth 16A



D4 多功能插座
Multifunction socket



D5 三极四线插座16A
3pole 4lines socket (16A)



D6 小三插
small 3pin socket



D7 15芯电脑插座
VGA(孔式)
15pin computer socket
VGA(hole type)



D8 15芯电脑插座
VGA(针式)
15pin computer socket
VGA(pin type)



D9 USB电脑插座
USB computer socket



D10 电视插座
TV socket



D11 双音响插座
Double sound socket



D12 话筒插座
Speaker socket



D13 双音频插座
Double audio socket



D14 视频插座
Video socket



D15 电话插座
Tel socket



D16 卡浓插座(针式)
Kalon socket(pin type)




D17 3.5mm耳机插座
Earphone socket



D18 S-端子
Terminal



D19 莫莱斯
Moka



D20 安普数据插板
AMP data flashboard




D21 科龙5类电脑插板
Krone 5 series computer
socket frame



D22 科龙6类电脑插板
Krone 6 series computer
socket frame



D23 西蒙6类电脑插板
Simione 6 series computer
socket frame



D24 西蒙5类电脑插板
Simione 5 series computer
socket frame



D25 朗讯数据插板
AVAYA data flashboard




D26 泛达数据插板
Qida data flashboard



D27 阿尔卡特
Alkat




D28 IBDN(北电)



D29 空白板
Empty plate



D30 IBM数据插板
IBM data flashboard



D31 TCL数据插板
TCL data flashboard

120型功能件 / 120 Type function accessories



118型功能件 / 118 Type function accessories



其它配套产品 / Other products



综合Integrated junction box

布线箱

型号 / Type	底盒尺寸 Base box size(mm)	配套面板 Suit panel(mm)	盖面材质 Panel material
DZB-HQ-300	350×350	300×300	铜面、不锈钢面 Brass, Stainless
DZB-HQ-400	450×450	400×400	
DZB-HQ-500	550×550	500×500	
DZB-HQ-600	650×650	600×600	

注：综合布线箱插座功能件的配置、线槽出口及底盒高度按工程实际需求配置。

Remark: The accessories inside multi socket box, the trunking exit and base box height can supplied by project requirement.



DZB-HQ-300




DZB-HQ-300



DZB-HQ-500



DZB-HQ-400

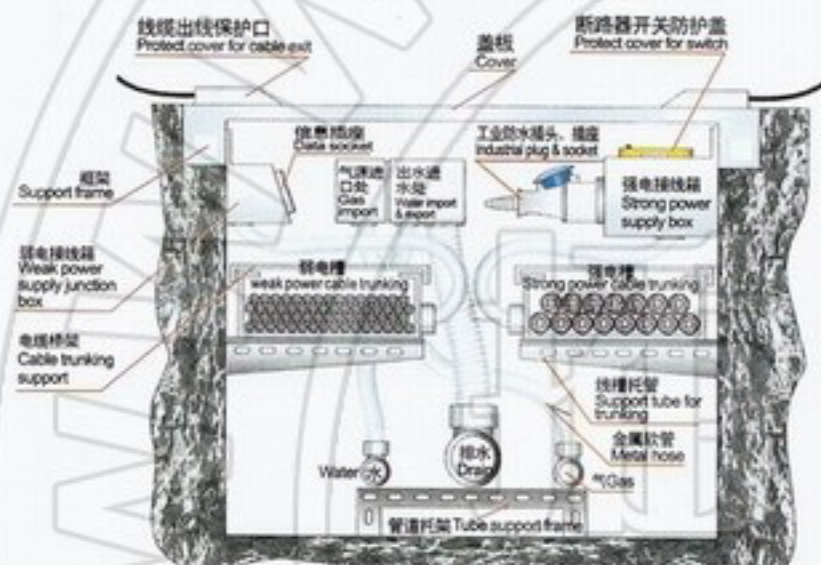

地槽出线箱示意图 / Sketch map


强电、弱电的线缆从各自的线槽中引出，采用金属软管与插座箱相连，线槽用托臂固定，气源管道、水管、排水管道顺地沟敷设，管道用托架固定，每到综合布线箱时设置三通，采用软连接分别接入水阀、气源快速接头、排水池。选用时根据工程地沟实际情况决定综合布线箱的尺寸。

Weak & strong power supply cable connected out from different trunking, then connected to socket junction box by metal hose. Trunking fixed by support frame, then the gas tube, water tube and drain tube set in trunking in turn. When all tube arrive junction box, the three branch trunking used. Then, use hose to connect to water valve, gas fast connector and drain pool. Different combine cable management junction box used in different project requirement.

综合地插布线图 / Combine socket sketch map

综合布线箱由电源、信息、水源、气源组成，适应于大开间展览场所，布线容量大，强电、弱电分别用线槽敷设线缆，保证强电、弱电之间的屏蔽，不会产生干扰，箱内可设置380V、220V插座，并有各回路断路器控制，插座选用工业防水插头、插座，使用安全、可靠，水源给水采用三角水阀，可快速连接供水及排水。气源选用快速自动接头，使用方便灵活，弱电可以组装多位86型防水面板。

The combine cable management junction box combined by power supply, information resource, water resource and gas resource. It's suit for big area where need big cable capacity strong power & weak power cable fixed in same trunking with shield. The 380v & 220V voltage socket can used in box, and can be controlled by separate section breakers. The socket for strong power use industrial plug & socket for more safety. The water resource use three angle valve for rapid water supply and drain. Gas resource use fast automatic connector. In weak power supply can use more 86 type water proof panels.

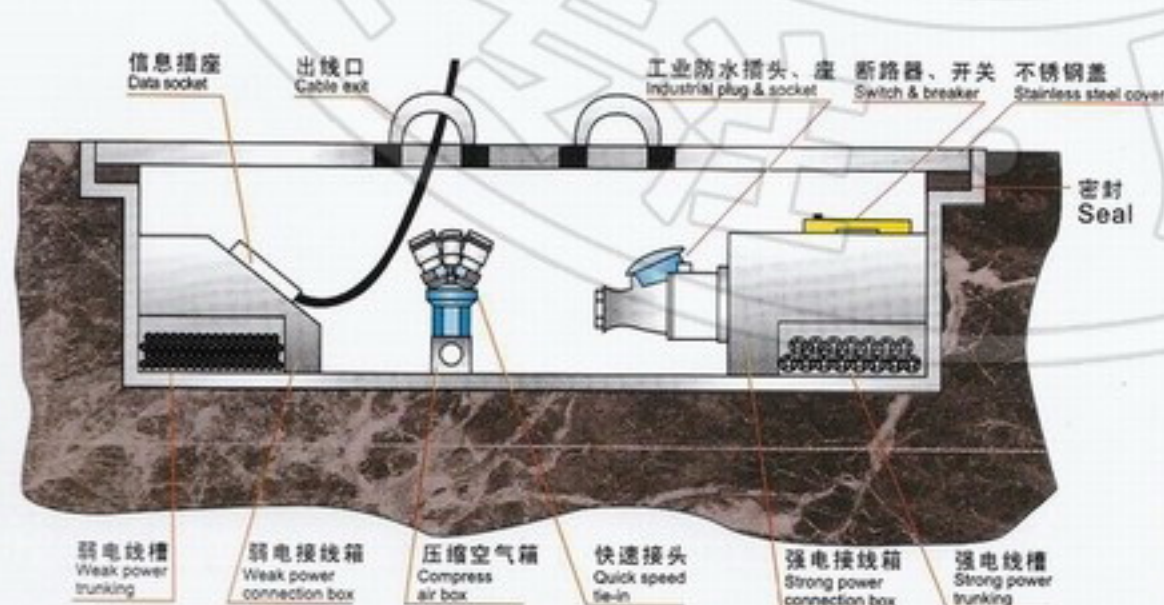

地面 Floor wiring devices

布线装置


概述 / Brief introduction

DZB 系列地面布线器材是由分线盒插座盒出线口各类连接件线槽密封胶等组合而成, 广泛使用于大开间或需要打隔断的场合, 便于联网取电, 布线距离远, 维护方便。强弱电可以走同路由相邻的地面线槽, 并且屏蔽后可按到同一出线盒内的各自插座。根据不同的容量, 选取相应规格的线槽分线盒出线能满足各种方式和场合的需要。

该产品具有穿线多, 占用厚度小, 施工方便, 高低可调, 防水防尘性能好等优点。

DZB地面布线装置, 适用于自动化办公大楼、计算机房、金融保险、教育、办公、机场、商场、工厂等多种类型的建筑物。

DZB series underfloor cable management system combine junction box, socket box, insert stud, all kinds of connection parts trunking and sealed glue. It's widely used at places need long distance or block off for easy connect to power supply. It's easy management. The cable for strong power & weak power can be arranged in different trunking. The cables can be connected to different sockets in same junction box after shield. The trunking & junction box can be choose according to different capacity to suit different places. The product has more cable capacity, take less thickness mat, easy construction, height adjustable, water-proof & dust-proof etc. This system can be used in construction of automatic office building, computer room, financial insurance, education, office, airport, super-market & factories.

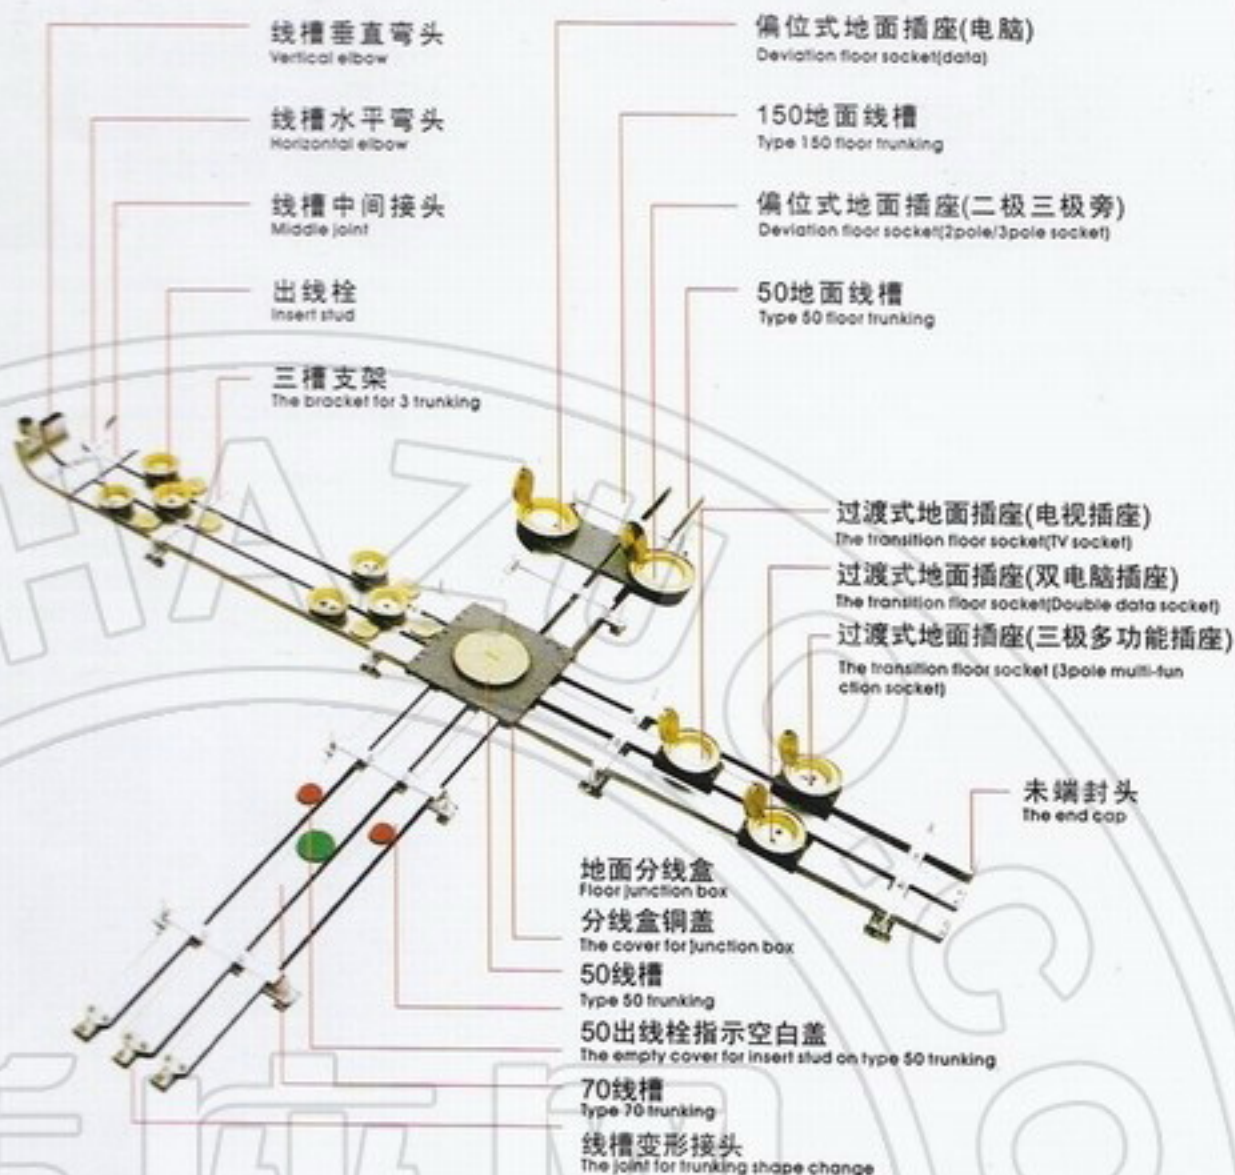

地面 Floor Trunking

线槽

400-657-1110


概述 / Brief introduction

材质内外均为热浸镀锌, 表面防腐性极好。线槽出线口处均采用无螺纹接口, 可避免搬运或施工中碰坏螺纹部分而造成损失, 致使大楼完工启用时成为无法弥补的损失, 因而丧失铺设线槽的作用。

线槽标准长度为3m, 如用户需要可特殊加工(2-9m)。

The inside & outside of material is steel with hot zinc galvanization. Its surface has good antiseptic. There is no screw thread at trunking exit to avoid damage to rust in transportation or construction.

Trunking standard length is 3m, other length required(2-9m).

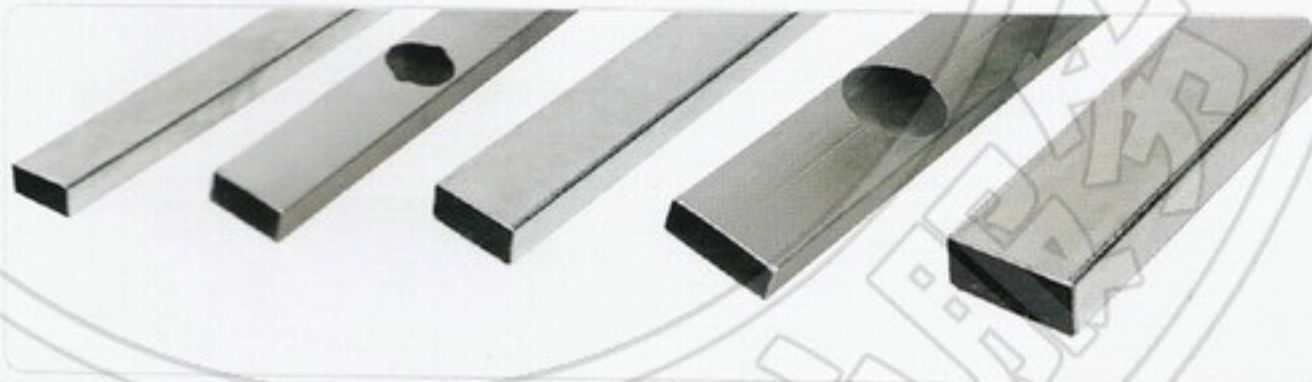

地面线槽内允许穿线根数表 / The number of cables inside

型号 / Type	截面积 mm × mm Section acreage	有效面积 mm ² Useful acreage	BV-500 线(Cable)				RVS 线(Cable)		计算机传输直径6.0 Data cable Dia.6.0
			1.5m ²	2.5m ²	4.0m ²	6.0m ²	2×0.2	2×0.75	
DZB-50C	50×25	960	22 Pcs	18 Pcs	14 Pcs	10 Pcs	15 Pcs	7 Pcs	7 Pcs
DZB-50GC	50×40	1640	52	42	33	25	35	18	18
DZB-70C	70×25	1470	48	38	29	22	32	15	15
DZB-70GC	70×38	2300	68	56	43	31	47	23	23
DZB-100	100×25	2010	59	48	38	27	41	20	20
DZB-100GC	100×38	3260	95	77	60	43	65	32	32
DZB-150C	150×25	2900	85	69	53	38	60	29	29
DZB-150GC	150×38	4780	143	117	91	65	98	48	48
DZB-230C	230×25	3×2000	3×48	3×48	3×38	3×27	3×41	3×20	3×16
DZB-230GC	230×38	3×2800	3×70	3×70	3×55	3×39	3×58	3×28	3×25

线槽 Trunking accessories

配件

分线盒空白堵头

The empty stopple for junction box



型号 / Type	可配线槽(mm) Suit for trunking
DZB-00-5025	50×25
DZB-00-5040	50×40
DZB-00-7025	70×25
DZB-00-7038	70×38
DZB-00-10025	100×25
DZB-00-10038	100×38

线槽中间接头

The middle joint for trunking



型号 / Type	可配线槽(mm) Suit for trunking
DZB-01-5025	50×25
DZB-01-5040	50×40
DZB-01-7025	70×25
DZB-01-7038	70×38
DZB-01-10025	100×25
DZB-01-10038	100×38
DZB-01-15025	150×25
DZB-01-15038	150×38
DZB-01-23025	230×25
DZB-01-23038	230×38

90° 水平弯头

90° horizontal elbow



型号 / Type	可配线槽(mm) Suit for trunking
DZB-02-5025	50×25
DZB-02-5040	50×40
DZB-02-7025	70×25
DZB-02-7038	70×38
DZB-02-10025	100×25
DZB-02-10038	100×38
DZB-02-15025	150×25
DZB-02-15038	150×38
DZB-02-23025	230×25
DZB-02-23038	230×38

120° 水平弯头

120° horizontal elbow



型号 / Type	可配线槽(mm) Suit for trunking
DZB-03-5025	50×25
DZB-03-5040	50×40
DZB-03-7025	70×25
DZB-03-7038	70×38
DZB-03-10025	100×25
DZB-03-10038	100×38
DZB-03-15025	150×25
DZB-03-15038	150×38
DZB-03-23025	230×25
DZB-03-23038	230×38

90° 垂直弯头

90° vertical elbow



型号 / Type	可配线槽(mm) Suit for trunking
DZB-04-5025	50×25
DZB-04-5040	50×40
DZB-04-7025	70×25
DZB-04-7038	70×38
DZB-04-10025	100×25
DZB-04-10038	100×38
DZB-04-15025	150×25
DZB-04-15038	150×38
DZB-04-23025	230×25
DZB-04-23038	230×38

线槽末端封头

The end cap



型号 / Type	可配线槽(mm) Suit for trunking
DZB-05-5025	50×25
DZB-05-5040	50×40
DZB-05-7025	70×28
DZB-05-7038	70×38
DZB-05-10025	100×25
DZB-05-10038	100×38
DZB-05-15025	150×25
DZB-05-15038	150×38
DZB-05-23025	230×25
DZB-05-23038	230×38

线槽变形接头

The joint for trunking shape change



型号 / Type	可配线槽(mm) Suit for trunking
DZB-06-A1	50×25-φ15~φ50
DZB-06-B1	50×40-φ15~φ50
DZB-06-C1	70×25-φ15~φ50
DZB-06-D1	70×38-φ15~φ50
DZB-06-E1	100×25-φ15~φ50
DZB-06-E3	100×38-φ15~φ50
DZB-06-F1	150×25-φ15~φ50
DZB-06-F3	150×38-φ15~φ50
DZB-06-G1	230×25-φ15~φ50
DZB-06-G3	230×38-φ15~φ50

线槽变径接头

The joint for trunking size change



型号 / Type	可配线槽(mm) Suit for trunking
DZB-06-C2	70×25-50×25
DZB-06-D2	70×8-50×40
DZB-06-D3	70×38-50×25
DZB-06-E2	100×25-50×25-70×25
DZB-06-E4	100×38-50×40-70×38
DZB-06-E5	100×38-50×25-70×25
DZB-06-F2	150×25-50×25-100×25
DZB-06-F4	150×38-50×40-100×38
DZB-06-F5	150×38-50×25-100×25
DZB-06-G2	230×25-50×25-150×25
DZB-06-G4	230×38-50×40-150×38
DZB-06-G5	230×38-50×25-150×25

线槽支架(单槽)

The bracket (for one trunking)



型号 / Type	可配线槽(mm) Suit for trunking
DZB-07-50C1	50×25
DZB-07-50GC1	50×40
DZB-07-70C1	70×25
DZB-07-70GC1	70×38
DZB-07-100C1	100×25
DZB-07-100GC1	100×38
DZB-07-150C1	150×25
DZB-07-150GC1	150×38
DZB-07-230C1	230×25
DZB-07-230GC1	230×38

线槽支架(双槽)

The bracket (for two trunking)



型号 / Type	可配线槽(mm) Suit for trunking
DZB-07-50C2	50×25
DZB-07-50GC2	50×40
DZB-07-70C2	70×25
DZB-07-70GC2	70×38
DZB-07-100C2	100×25
DZB-07-100GC2	100×38
DZB-07-150C2	150×25
DZB-07-150GC2	150×38

线槽支架(三槽)


The bracket (for three trunking)



型号 / Type	可配线槽(mm) Suit for trunking
DZB-07-50C3	50×25
DZB-07-50GC3	50×40
DZB-07-70C3	70×25
DZB-07-70GC3	70×38
DZB-07-100C3	100×25
DZB-07-100GC3	100×38

增加圈

Heighten ring



型号 / Type	配套面板(mm) Suit for trunking	可增高高度(mm) Adjustable height
DZB-08-8020	φ80	20
DZB-08-8030	φ80	30
DZB-08-10520	φ105	20
DZB-08-10530	φ105	30
DZB-08-12520	φ130	20
DZB-08-12530	φ130	30
DZB-08-12550	φ130	50
DZB-08-15020	φ150	20
DZB-08-15030	φ150	30
DZB-08-15050	φ150	50

良好的环境，为每一位员工提供了优良的工作状态；
先进的生产设备，
为每一只产品的出厂提供了良好的保证。

Good environment provided the excellent work condition for each employee,
Advanced production equipments provided good guarantee
for each delivering product



模具制造车间 / Module workshop



铸造车间 / Casting workshop



总装生产线 / Assemble producing line



地面 Floor wiring installation

布线安装示范


施工安装要求 / Fixing requirement

1. 地面线槽在转弯、分支处应设置分线盒(箱)，线槽及其附件各个连接部位具有一定的连接强度，对于有缝隙的连接处要密封处理，以防泥浆渗入。
 2. 线槽及附件安装完毕后，应对整体进行水平高度调整，通过调整螺丝调划高度，出线口空白盖、分线盒空白盖表面应处于同一水平面。
 3. 当地面为地毯或塑料地板时，分线盒和出线口盖允许空出地面，但不得大于3mm。
 4. 同一路径的不同回路绝缘导线可设于同一线槽内，但必须同时切断，线槽内导线总截面(包括外层)不应超过线槽内截面的30%。
 5. 强、弱电线路应分槽敷设，强、弱电在分线盒(箱)交叉时必须采用金属隔板隔开，强、弱电的导线不得在线槽内直接接触。
 6. 地面线槽内的各种配线仅允许在分线盒出线口处接头。
 7. 地面线槽在施工安装中，要求全部线槽管连成一个可靠的接地整体。
1. The junction box will be used at the swerve or embracement in floor trunking. The floor trunking and its accessories' connection parts should have definite connection intension. It's also Should be airproof disposal to prevent the slop filter.
2. After finish the trunking and its accessories fixing. The level height should be adjusted: Adjusting the screws height to make the out line hole cover and junction box cover lie th same level.
3. When the floor is carpet or plastic floor, the junction box and out line hole is not permit 3mm higher than the floor.
4. the same route's different loop insulated wire can be fixed in same trunking. But they are should be cut at the same time. The wire's general section (Including outer layer) in trunking should not more than 30% of trunking's inner section.
5. The main strong and weak electricity should be put in different trunking. the crossing of strong and weak electricity in junction box should be separated by metal board and they should not Direct contact.
6. All the accessories in floor trunking can be tie-in at the exit port of junction box.
7. All the trunking pipe should be connected as a credible earthing body in trunking installation.

施工安装示意图 / The installation sketch map



地面线槽在地面敷设的图例 / The cutling of floor trunking in ground

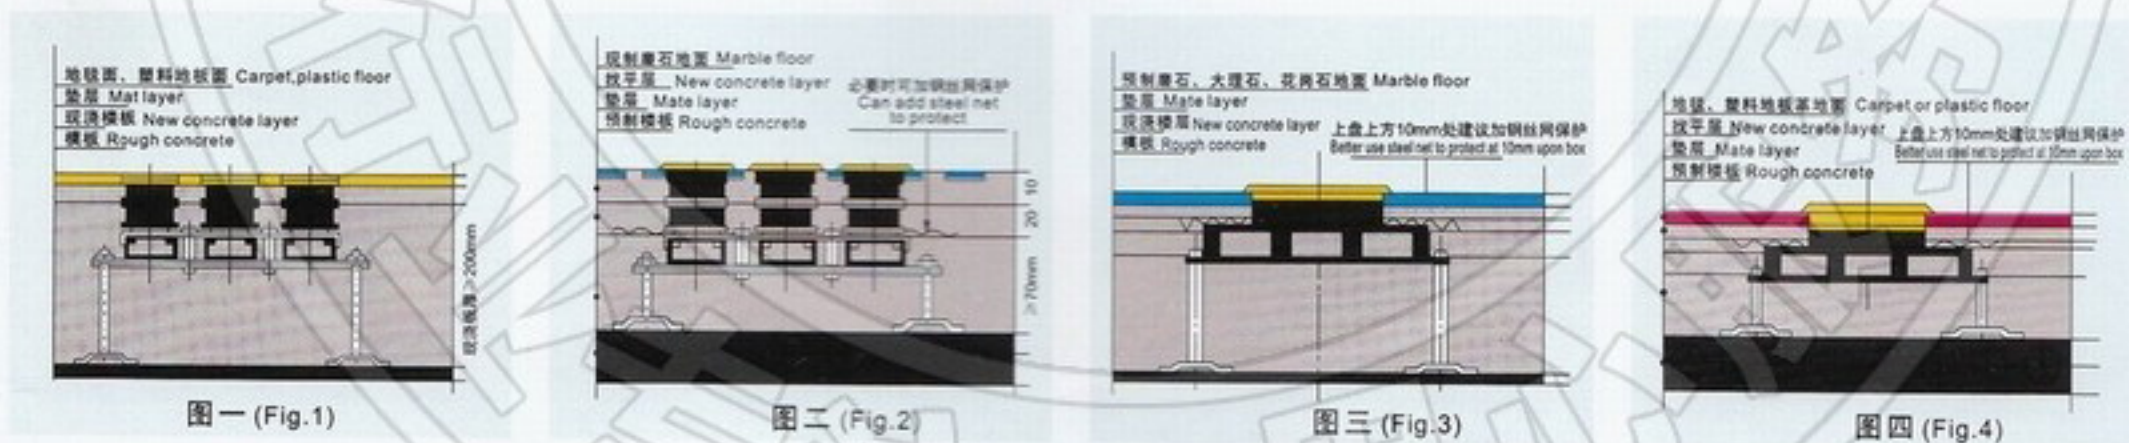

DZB系列地面布线设计和施工 / DZB series underfloor cable management image




易安 Fast floor trunking & accessories

地面线槽、附件


DZB易安地面线槽的布线范围广泛，适用于各类商场、办公室、写字楼、电脑房等各种用电设备的强弱电线敷设，易安地面线槽的组合设计，可在任何地方加装或除去个别的出线箱组件，线槽可分明装式和暗装式。易安地面线槽的高度是60mm，标准长度有2m，标准宽度有：150mm、250mm、300mm三种，也可按用户需要另行加工。

DZB fast floor trunking widely used in all kinds of markets, office, computer room etc. where the equipment need weak or strong power supply. This trunking design easy to add or cancel junction box according to requirement. There are surface & flush type trunkings. The height is 60mm with 2m standard length & 150mm or 250mm or 300mm width. It can make according to client's requirements.


易安线槽 / Fast floor trunking

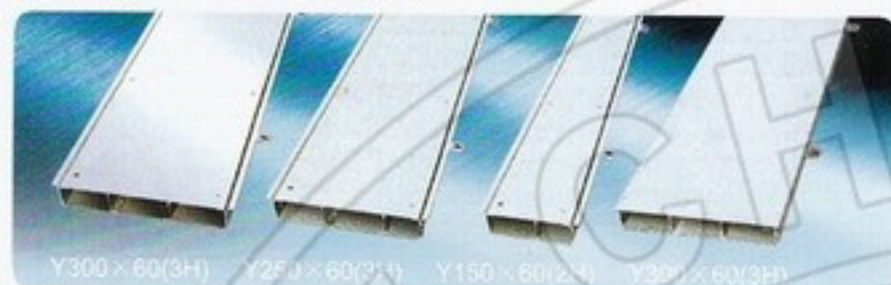

易安线槽分接箱 (出线口) / Fast floor trunking junction box (for cable exit)

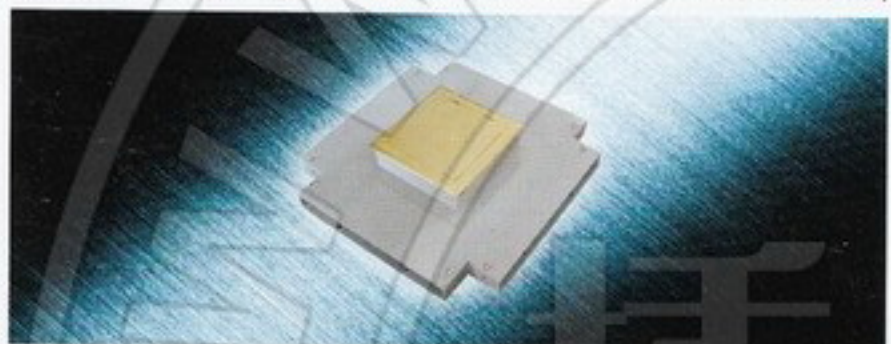


易安线槽：规格 (300×60) / Fast floor trunking: Spec.(300×60)

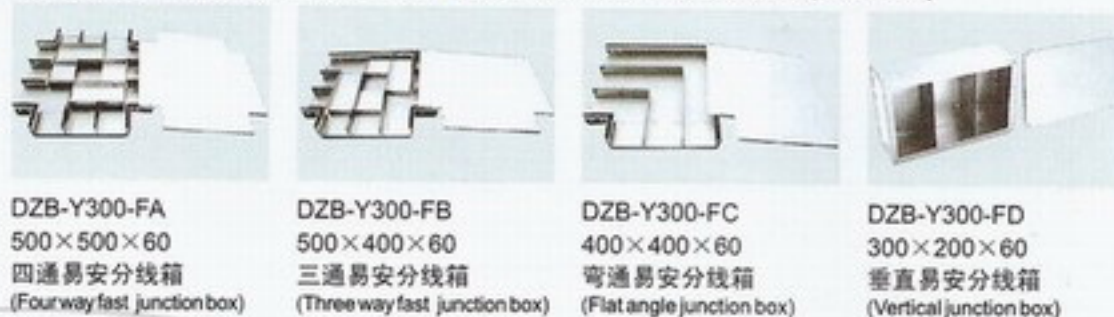

接线图实例：规格 (300×60) / Wiring diagram example: Spec.(300×60)



附件 / Accessories

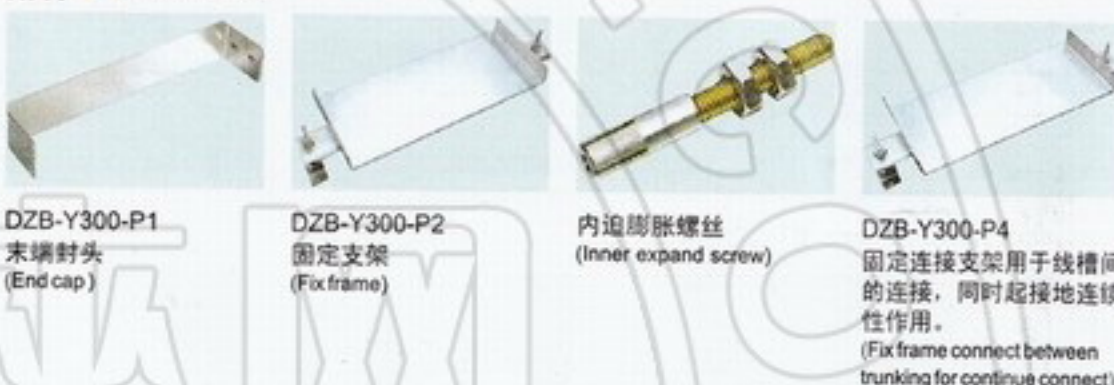

易安 The photo of fast floor trunking in using

地面线槽在工程中使用的实图



在大开间工程中交叉安装
Used in big distance cross place




易安线槽与水管、气管交叉安装
The trunking installation with water tube & gas tube



易安线槽与地面线槽连接安装
Fast trunking connect floor trunking



线槽交叉及引上安装
Trunking across & line up installation

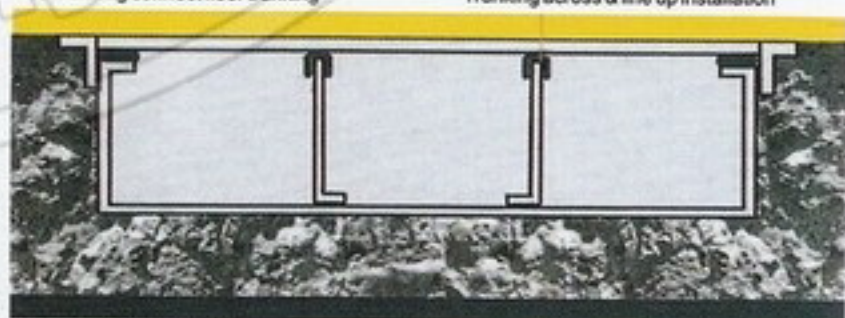


易安地面线槽剖面图
The cutaway view of fast floor trunking

易安 The wiring diagram of fast trunking

地面布线示意图

易安线槽及出线盒在架空地板使用的剖面图 / The cutaway view of fast trunking & junction box on empty floor:

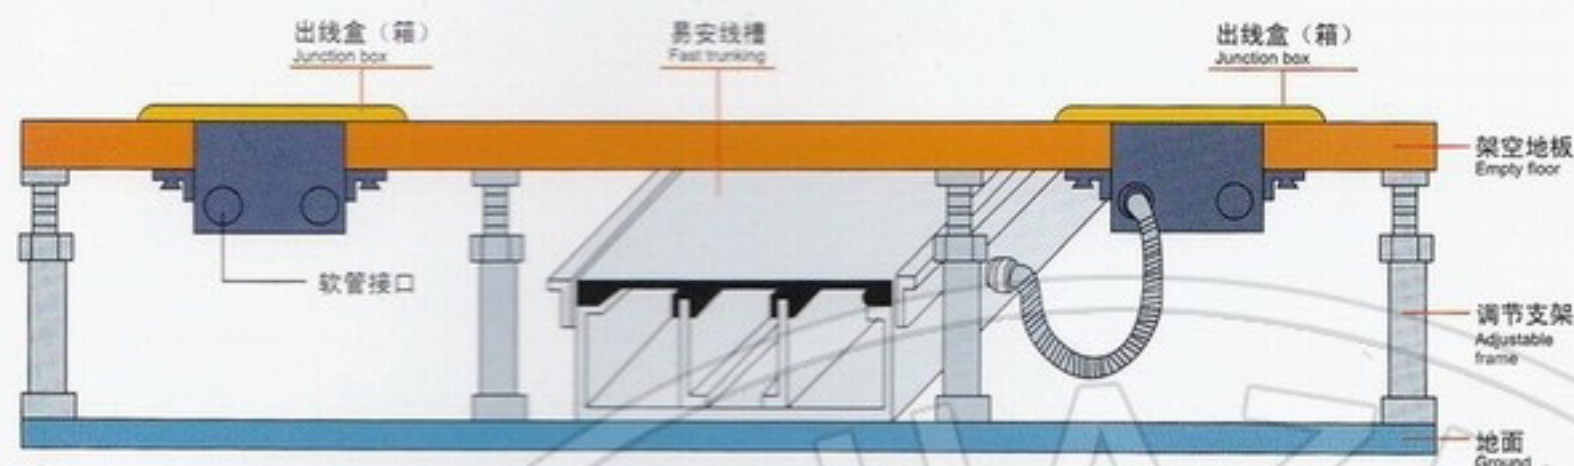

易安线槽与地毯面使用图例
The photo of fast trunking used in carpet



→ DZB系列活动地板布线系统用来分布强电、电话、信息点的。布线方便且布线容量大。

→ 盒子遍布多种口径敲落孔，便于和软管连接。

→ 出线盒或出线口与地下布线槽配套使用，能得到满意的效果。

→ 活动地板的一般高度采用15cm和30cm，非常适合易安线槽的使用。

The DZB movable floor cable management system can arrange small & strong power supply, Tel and Data in easy way, but will big capacity.

There are different knock out on junction box for hose easy connected. The junction box & floor trunking use together for more easy.

Movable floor height is 15cm & 30cm for fast trunking easy use.





中国工程建设推荐产品
Recommended Products For Chinese Engineering Construction



质量安全认证
Quality Safety Certificate



国际质量体系认证
International Quality System Certification



国际质量体系认证
International Quality System Certification



上海正旦电工

上海正旦电器有限公司

SHANGHAI ZHENG DAN ELECTRICAL CO.,LTD

地址：上海市钱桥经济开发区奉柘路3385号

Add: No.3385, Fengzhe Road, Qianqiao Economic Development Zone, Shanghai

网络实名：正旦地插座

制造商：浙江精艺建筑电器有限公司

Manufacturer: ZHEJIANG JINGYI BUILDING ELECTRICAL CO.,LTD

地址：浙江乐清市中心工业园区2号支路

Add: Number 2 By-pass Road, Center Industrial District, Yueqing, Zhejiang




ISO9001

CHAZU

Qualification certificate

资质证书

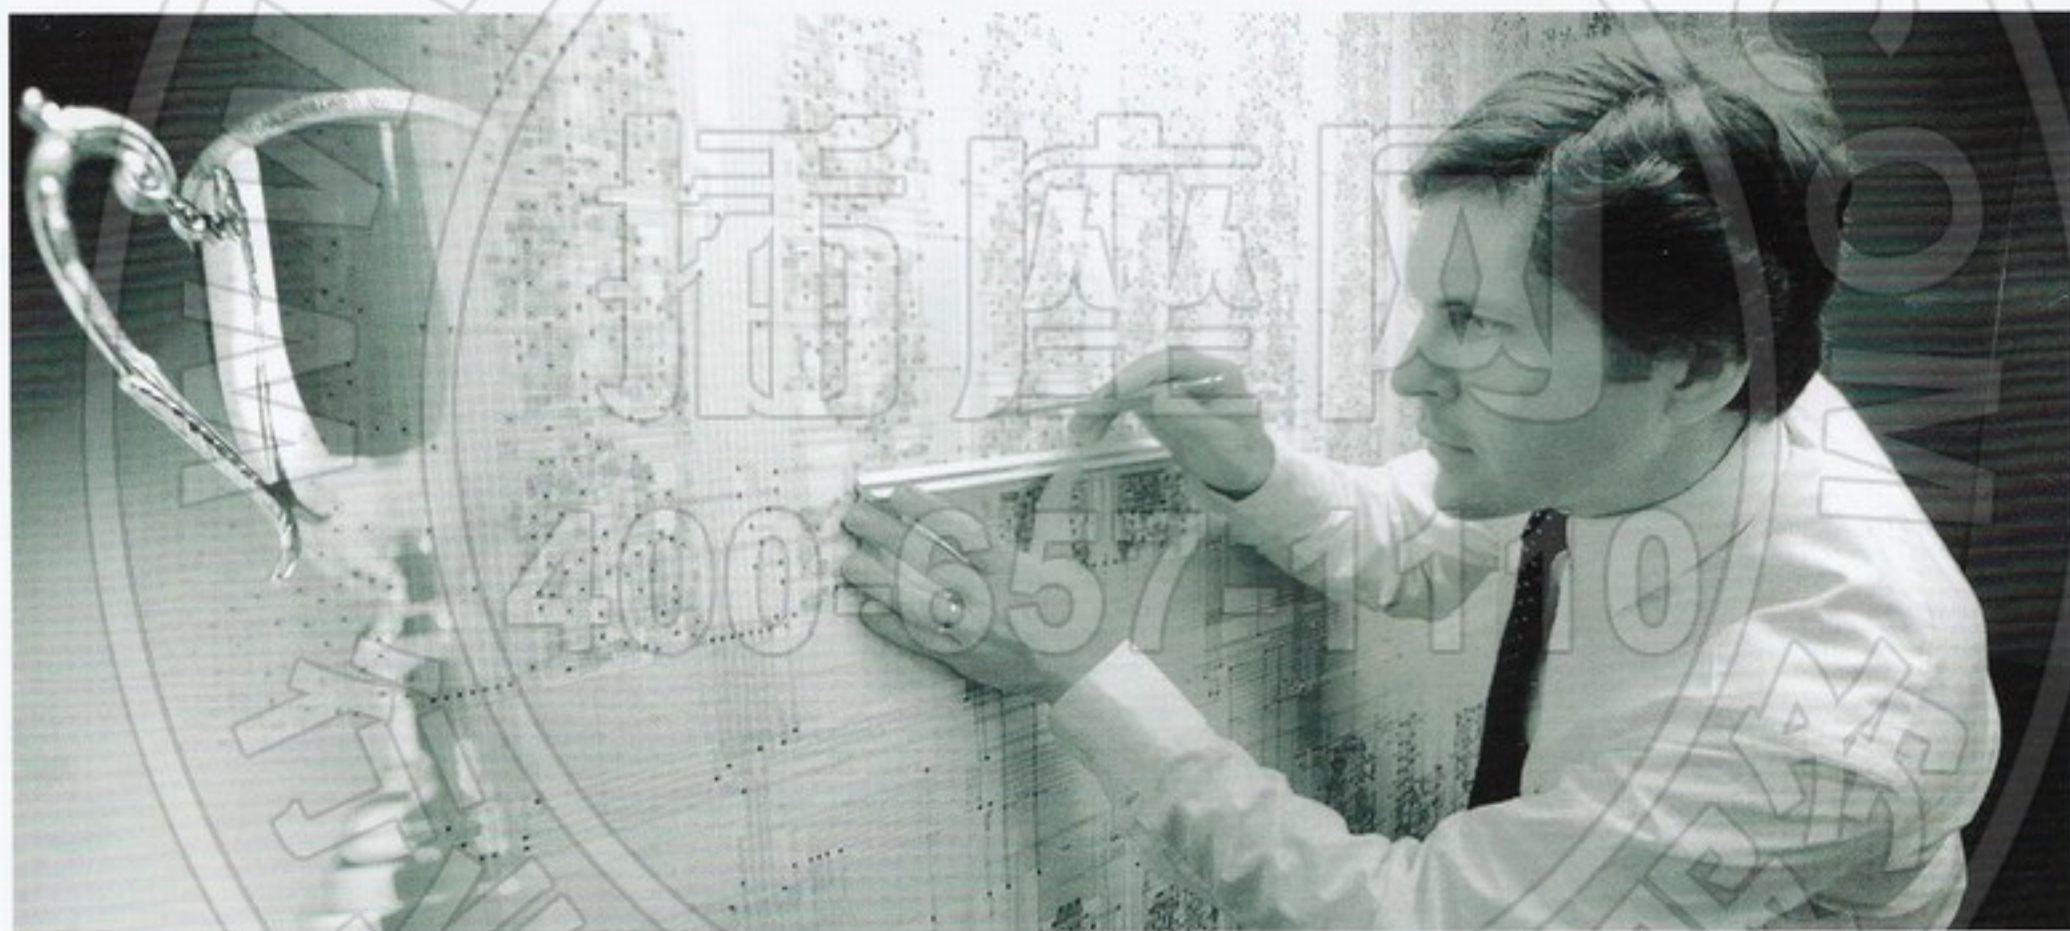



The outstanding qualities reject mediocrity

品质

体现我们的尊严

Qualities embody our dignity,
The outstanding qualities reject mediocrity





南京图书馆



南京奥林匹克体育中心



广州市锦绣香江别墅区



北京现代城



北京市东方广场

新华通讯社
北京天安门城楼
首都机场
中关村大厦
外交部大楼
中国光大银行
国家审计署
北京高等教育出版社
北京现代城
北京市东方广场
南京河海大学
南京大学
徐州公安局信息大楼
云南省图书馆
昆明福林广场
昆明地税大厦
昆明金泰大厦
温州数码科技广场
深圳市民中心
深圳市公安局大楼
深圳市规划大厦
东莞市科技局大楼
东莞市政府大楼
太原市工商银行
太原市民生银行
山西国贸大厦
太原市美特好超市
广州市新白云机场
广州中山大学
上海港汇广场
上海市美罗城
上海黄浦区机关大楼
上海市海关检验检疫中心
宁波市理工大学
重庆市银泰百货大厦



东莞市政府



深圳市民中心

成都双流机场
成都数码电脑城
成都市金宇大厦
成都新世纪广场
武汉市财经大学
武昌烽火科技楼
武汉广场
武汉国际会展中心
武汉数码港
厦门市商检大楼
上海电信世界大楼
上海华东师范大学
昆山精成科技园
浦东金桥进出口加工区
烟台润隆大厦
烟台太平洋大酒店
常州宾馆
常州市东嘉棉麻大厦
常州市保险大厦
吉林省财政厅大楼
吉林省党校
郑州市第二长途通讯大楼
郑州大学信息中心
开封市人民银行
安阳市电业局
河北省送变电公司
苏州市邮电局
苏州市吴中区人民政府大楼
福州市中亭街商业区
福州市大饭店
福州烟草大厦
浙江大学
陕西省图书馆
陕西省地税厅
西安市亲亲宝贝城
济南国际展览中心
济南市吉祥苑住宅楼
山东大学
青岛流亭机场
青岛市四方大酒店
青岛市蔚蓝海岸
南京奥林匹克体育中心
.....



北京南粤苑

Main achievements

业绩摘要



北京市丰联广场



广州市珠江帝景苑



昆明地税大厦




云南省图书馆




北京市新华通讯社




云南建工

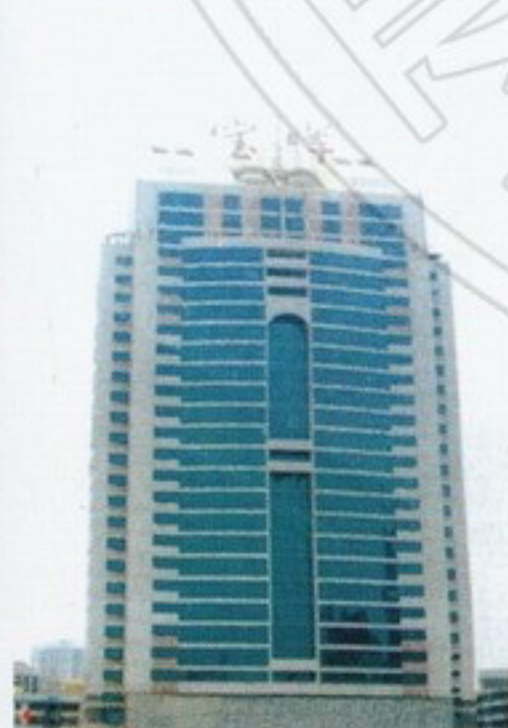

深圳市宝安区宝辉大厦

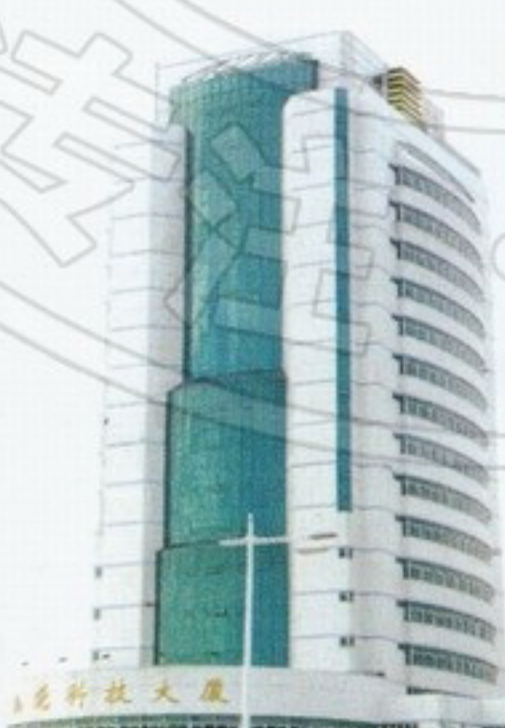

东莞科技大厦

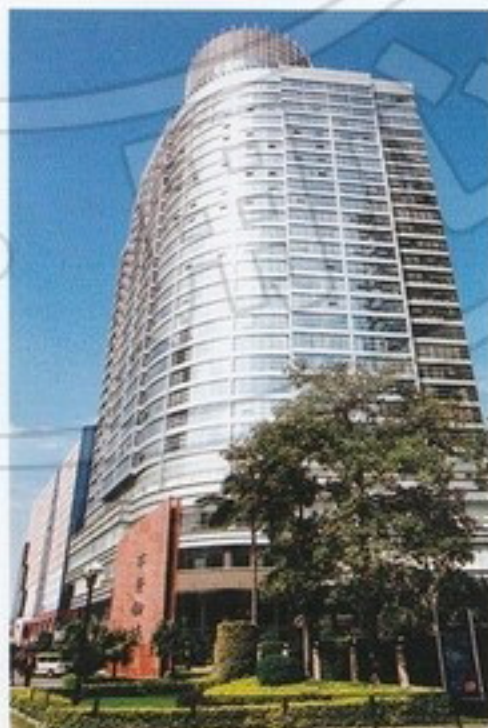

广州华景新城



广州荔湾医院

弹起式 Spring type floor socket

地面插座



IECS



CE

专业

卓越源自Excellence root in profession

行业专注·用心服务

电子样本

<http://www.chazuowang.com>

行业最大的电子样本库

插座网本着“行业专注、用心服务”的理念为用户提供电子样本在线翻阅、在线打印、下载等专业化、个性化服务

